

PROFESSIONAL TOOLS & EQUIPMENT



## Here Comes The Sun

As the weather improves in the coming seasons, it is time to complete those outdoor jobs on that ever-growing list. Whether you are searching for industrial cooling solutions, or wanting to reinvigorate the garden patio, this catalogue has everything you need to achieve your Spring & Summer jobs.



## Introducing... NEMESIS

Our new range of automotive equipment are specifically designed for professional workshop environments. Find axle stands, rapid-lift trolley jacks, farm jacks, and wheel dollies on pages 100 & 101.



## **VISIT US ONLINE**

Q jeffersontools.com

## FOLLOW US ON SOCIAL MEDIA

















## CONTENTS

AIR TOOLS		Welding Magnets		ACCESS EQUIPM	MENT
		Welding Rods			
Air Hose		Welding Tools	53	Fibreglass Stepladders	
Air Kit		Welding Wire	43	Multi-Purpose Ladders	
Blow Guns		BOWER TOOLS		Multi-Purpose Flbreglass Ladders	
Compressors	6-13	POWER TOOLS		Platforms	92
Compressor Oil	6	Bandsaws	70-71	Roof Rack Ladder Clamps	
Compressor Spares	14	Belt Linishers		Scaffolding Towers	
Die Grinder	23	Bench Drills		Telescopic Ladders	96
Fittings	32-33	Bench Grinders & Stand		ALITOMOTIVE 9	
Hose Reels	16-17	Bit Holder		AUTOMOTIVE &	
Hydraulic Riveter	23	Box Cutter		WORKSHOP	
Lubricators	15	Burrs		Axle Stands	101, 105-106
Impact Socket & Adaptor Sets	26-29	Cement Mixers & Accessories		Bottle Jacks	104-105
Impact Sockets & Adaptors	30-31	Chop Saw		Creepers	113
Impact Wrenches	29	Chucks & Adaptors		Engine Cranes	107
Paint Pot & Accessories	19	Core Drill Bits		Heel & Toe Jacks	104
Palm Sander	23	Counter Sinks		Induction Heater & Accessories	112
Ratchet Wrench	23	Cut Off Saws	,	Magnetic Pickup Tool	111
Regulators	15	Drill Bits & Sets		Magnetic Trays & Holders	111
Spray Guns & Accessories	20-21	Hand Mixer & Accessories		Magnetic Spray Gun Holder	
Suzis	21			Mechanics Seats	
Tyre Inflators	24-25	Heat Guns & Accessories		Oil Filter Strap Wrenches	
		Holesaw Sets & Accessories		Parts Washer	
WELDING		Impact Screwdriver Bit Set		Pipe Benders	
	40.50	Impact Torsion Bit Set		Porta Powers	
Accessories		Magnetic Drills & Accessories		Pullers & Sets	
Air Fed Welding Helmet & Accessories		Morse Tapers		Shop Presses	
ARC Welders		Multi-Tool Blades		Transmission Jacks	
Brazing Kit		Pillar Drills		Trolley Jacks	
Curtains		Planer Blades		Wheel Nut Wrench Set	
Dinze Sockets		Power Bit Sets		Wheel Skates	
Earth Clamps		Quick Nut			_
Earth Lead		SDS Bits & Chisels		LIGHT & POWER	3
Electrode Holders		Slugger Bits		Battery Chargers & Conditioners	
Electrode Lead		Socket Adaptors		Booster Cables	
Fittings		Step Drills & Sets		Cable Reels	
Gas		TCT Blades			
Gas Regulators		Vacuums	76-77	Generators	
Gas Torch & Accessories				Headlamps	
Gauges	53	HEATING & COO	) L I N G	Inspection Lamps	
Gauntlets	52	Air Conditioners	79	Jump Starters	
Helmets	48-50	Fans		Plugs & Sockets	
Magnetic Clamps	52	Heaters		PTO Generators	
MIG Torches & Consumables	44-45			Spotlights	
MIG Welders	34-36	PRESSURE WAS	HING	Starter Chargers	
Panel Sockets	47			Throw Leads	
Plasma Cutters & Accessories	37	Accessories	,	Torches	
Propane Torches	40	Fittings		Transformers	
Soldering Mat	41	Lances & Accessories		Warehouse Lighting	
TIG Welders	39	Pressure Washers		Welder Generators	
Welders	34-39	Surface Cleaners	88	Work Lights	116-119

## CONTENTS

HAND TOOLS
Adjustable Quick Squares132
Adjustable Wrenches155
Angle Rule132
Axes / Hatchets146-147
Bolt / Cable Cutters149
Box Cutter
Breaker Bars154
Caulking Guns137
Chisel & Bolster Set148
Chisel & Punch Set138
Circlip Pliers139
Clamp Meter134
Clamps142-143
Crimping Sets135
Drill Press Vices144
Engineering Files138
Engineering Squares132
Extractor Sets
Fence Wire Tensioning Tool147
Hacksaws135
Hammers
Key Sets161
Knives & Blades
Measuring Tapes
Measuring Wheel
Multimeters
Paint Brushes
Pick & Hook Sets
Pliers & Sets
Podger Spanners
Pry Bars & Sets141
Punch Sets
Ratchet Spanners & Sets
Razor Blades & Accessories
Riveters149
Rulers131
Scrapers137
Screwdrivers & Sets
Socket Ratchets152-153
Sockets Sets
Soldering Iron135
Spanners & Sets
Spirit Levels133
Spring Clamps143
T-Bar Clamps143
Tap & Die Sets162-163
Tap & Drill Sets163
Thermometer134
Thread Repair Kits164

Torque Wrenches	153-154
Vernier Calipers	133
Vice Grips	142
Vices	144-145
Voltage Tester	134
Wire Strippers	135
Wood Chisels	138
Wrecking Bars & Sets	148
Wrenches	155

## STORAGE, LIFTING & TRANSPORT

Adjustable Work Table178
Cargo Net189
Chain Blocks182
Elastic Straps189
Gas Cylinder Trollies184
Grease Drum Trolley187
Hand Trucks & Spare Wheels185
Hoists181
Hydraulic Cylinders182-183
Hydraulic Hand Pumps182
Lever Blocks182
Lift Tables187
Magnetic Lifters181
Mobile Workshop Trollies178
Modular Storage System Combo177
Moving Skates186
Pallet Truck186
Plate Clamps181
Ratchet Straps188
Rucksack179
Slings190
Storage Bin Systems180
Storage Cases179
Tarpaulin189
Telescopic Trestle184
Tool Boxes179
Tool Chests170-171, 173-176
Tool Sets172-173
Truck / Site Boxes & Accessories 168-169
Welding Trolley Cart186
Workshop Trolley187

## PERSONAL PROTECTION EQUIPMENT

Eye Protection	19
Face Protection	19
Gloves	191-19
Hearing Protection	19

Kneeling Mats	.198
Respiratory Masks & Accessories	.196
Rubber Mats	.198
Spray Suits	.195

## ABRASIVES

Cup Brushes	201-202
Cutting Discs	200
Diamond Blades	199
Emery Cloth Rolls	201
Flap Discs	201
Grinding Discs	200
Grinding Wheels	202
Poly Discs	201
Wire Brushes	202
Vire Wheel Brushes	202

## FLUID & GREASE HANDLING

)rain Pan	211
Fluid Extractor	207
Fluid Pumps	207
- -uel Cans	210
uel Nozzle	203
Fuel Pumps & Tanks	203
- unnels	
Grease Gun Drill Attachment	209
Grease Guns & Accessories	209
Grease Pumps & Accessories	208
land Pump Sprayer	211
lerry Cans & Spouts	210
.ayflat Hose	207
Measuring Jugs	210
Oil Cans	211
Portable Tanks	204
Sewage Pumps	206-207
Spray Bottle	211
Vater Pumps	204-206

## GENERAL SUPPLIES

Anti Spatter	21
Buckets	21
Cable Ties	21
Compressor Oil	21
Cutting & Tapping Oil	21
Engine Oil	21
Galvanising Spray	21
Hand Cleaner	21
Multi Purpose Lubricant	21
Spray Paint	21
Tubs	21

## **Brand New Products**

**50M RUBBER** AIR HOSE REEL



TUNDRA 1/2" IMPACT SOCKET SETS



TUNDRA **IMPACT** SOCKETS




MAPP & BRAZING KIT





**CONDITIONERS** 





12 PIECE **BLIND BEARING PULLER SET** 



WORKSHOP STOOLS

**CAULKING GUNS** 



**MODULAR STORAGE** 

PIECE CALIBRATED MICROMETER TORQUE WRENCH SET



REPAIR & EXTRACTOR


SYSTEM COMBO

MOBILE WORKSHOP













## COMPRESSORS

## **25 LITRE 2HP 8 BAR COMPRESSOR**

- · Aluminium head with cast-iron cylinder
- · Welded tank fully-compliant with the latest safety requirements
- Fitted with an automatic pressure cut-out switch with twin gauges displaying tank and working pressures
- Equipped with transportation handle, front rubber mounted feet and rear wheels to assist manoeuvrability
- · Weight: 27.5kg



	JEFLD2001-110	JEFC025L08B-230
Tank Capacity:	25L Tank	25L Tank
Voltage:	110V (16A)	230V (13A)
Motor:	2HP / 1.5kW	2HP / 1.5kW
Max Pressure:	8bar / 116psi	8bar / 116psi
Air Displacement:	191L/min / 7cfm	191L/min / 7cfm






## **50 LITRE 2HP 8 BAR COMPRESSOR**

- · Aluminium head with cast-iron cylinder
- · Welded tank fully-compliant with the latest safety requirements
- Fitted with an automatic pressure cut-out switch with twin gauges displaying tank and working pressures
- Equipped with transportation handle, front rubber mounted feet and rear wheels to assist manoeuvrability
- · Weight: 36kg

DIRECT DRIVE









## **1 LITRE HT68 COMPRESSOR OIL**

## JEFOILHT68-1L

Specialist compressor oil which is also suitable for use in rotary screw, vane, vacuum pumps and reciprocating compressors.

- Prolonged service life due to good oxidation resistance, excellent anti-wear and anti-corrosion properties
- · Low foaming tendency
- Good demulsibility



PRICE EX.VAT

## **50 LITRE 2HP 10 BAR COMPRESSOR**

- · Aluminium head with cast-iron cylinder
- Welded tank fully-compliant with the latest safety requirements
- · Fitted with an automatic pressure cut-out switch with twin gauges displaying tank and working pressures
- · Equipped with transportation handle, front rubber mounted feet and rear wheels to assist manoeuvrability
- · Weight: 36.8kg





	JEFC050L10B-230
Tank Capacity:	50L Tank
Voltage:	230V (13A)
Motor:	2HP / 1.5kW
Max Pressure:	10bar / 145psi
Air Displacement:	221L/min / 8cfm









## **50 LITRE 3HP 10 BAR V PUMP COMPRESSOR**

- · Aluminium head with cast-iron cylinders
- · Direct-drive, V-twin pump assembly
- · Welded tank fully-compliant with latest safety standards
- · Automatic pressure cut-out switch with twin gauges displaying tank and working pressures
- · Equipped with transportation handle, front rubber mounted feet and rear wheels to assist manoeuvrability
- · Powder-coated finish on the tank provides protection against corrosion
- · Weight: 41kg





	JEFC050V10B-230
Tank Capacity:	50L Tank
Voltage:	230V 13A
Motor:	3HP / 2.2kW
Max Pressure:	10bar / 145psi
Air Displacement:	412L/min / 14.6cfm













6.5HP/

4.8kW

6.5HP /

4.8kW

10bar /

145psi

10bar /

145psi

480L/min /

16.9cfm

480L/min /

16 9cfm

## **100 LITRE 3HP 10 BAR COMPRESSOR**

50 Litre Petrol

Compressor

100 Litre Petrol

Compressor

· Comes complete with pressure regulator

JEFCIND050P-6.5

2 JEFCIND100P-6.5

- · Heavy-duty cylinders with alloy heads for improved heat dissipation
- · Large and solid wheels for ease of mobility
- · Front castor wheel 360° turn around
- $\boldsymbol{\cdot}$  Welded tank to comply with the latest safety requirements
- · Powder coated tank
- · Heavy duty electric motor single phase
- · Twin pressure gauges show tank and working pressure
- · Weight: 66kg




50L

100L



	JEFC100L10B-230		
Tank Capacity:	100L Tank		
Voltage:	230V (13A)		
Motor: 3HP / 2.2kW			
Max Pressure:	10bar / 145psi		
Air Displacement: 261L/min / 9.2cfm			





96dB LWA

96dB LWA

73kg

88kg

## **150 LITRE 3HP 10 BAR COMPRESSOR**

- · Comes complete with pressure regulator
- · Fitted with a heavy duty single-phase
- · Heavy-duty cylinders with alloy heads for improved heat dissipation
- · Large and solid wheels for ease of mobility
- · Twin front castor wheel for improved stability and manoeuvrability
- · Drive guards offer protection to the flywheel and belt assembly
- · Powder coated tank
- · Belt driven
- · Twin pressure gauges show tank and working pressure
- · Weight: 102kg





	JEFC150L10B-230
Tank Capacity:	150L Tank
Voltage:	230V (13A)
Motor:	3HP / 2.2kW
Max Pressure:	10bar / 145psi
Air Displacement:	408L/min / 14.4cfm



FULL COPPER MOTOR, RATED

Includes: Regulator & complete wheel kit WORTH









## **200 LITRE 3HP 10 BAR COMPRESSOR**

- · Fitted with a heavy duty single-phase 3HP motor
- · Heavy-duty cylinders with alloy heads for improved heat dissipation
- · Comes complete with pressure regulator with moisture trap
- · Large and solid wheels for ease of mobility
- · Twin front castor wheel for improved stability and manoeuvrability
- · Drive guards offer protection to the fly-wheel and belt assembly
- · Powder-coated tank
- · Twin pressure gauges showing tank and working
- · Dimensions: 1385 x 498 x 1042mm
- · Weight: 104kg





JEFC200L10B-230 Tank Capacity: 200L Tank 230V (13A) Voltage: 3HP / 2.2kW Motor: Max Pressure: 10bar / 145psi Air Displacement: 408L/min / 14.4cfm

TRIPLE CYLINDER

PUMP

## **200 LITRE 4HP 10 BAR COMPRESSOR**

## JEFCIND200L-4.0

· Heavy-duty cylinders with alloy heads for improved heat dissipation

· Full copper motor, rated s1-100% Duty cycle

· Pressure regulator with moisture trap

· Drive guards offer protection to the fly-wheel and belt assembly

· Powder-coated tank

· Twin pressure gauges showing tank and working pressure

· Pump Speed: 945rpm

· Cylinders: 3

· Free Air Delivery: 9.4cfm (266 L/min)

· Guaranteed Sound Power: 96dB LWA

· Weight: 146kg

· Dimensions: 1365 x 477 x 1033mm

LIQUID FILLED PRESSURE GAUGES





	JEFCIND200L-4.0	
Tank Capacity:	200L Tank	
Voltage:	230V (16A)	
Motor: 4HP / 3.0kW		
Max Pressure:	ressure: 10bar / 145psi	
Air Displacement:	452L/min / 15.9cfm	













## **270 LITRE 2X3HP 10 BAR TANDEM COMPRESSOR**

 $\cdot\,$  270L Belt-driven compressor suitable for professional workshops

· Fitted with 2 heavy duty single-phase 3HP motors

 $\cdot\,$  Heavy-duty cylinders with alloy heads for improved heat dissipation

**CONTROL UNIT** 

· Anti-vibration padded feet

· Drive guards offer protection to the fly-wheel and belt assembly

· Powder-coated tank

 Welded tank fully-compliant with the latest European manufacturing & safety standards

· Guaranteed Sound Power: 97db LWA

· Weight: 190kg



FULL COPPER MOTORS, RATED



| JEFC270T10B-230 |
| Tank Capacity: 270L Tank |
| Voltage: 230V (32A) |
| Motor: 2x 3HP Motors / 2 x 2.2kW |
| Max Pressure: 10bar / 145psi |
| Air Displacement: 838L/min / 29.6cfm |

## **270 LITRE 3 PHASE 10 BAR PROFESSIONAL COMPRESSORS**

- · Fitted with 4x anti-vibration feet
- · Welded tank to comply with the latest safety requirements
- · Belt driven
- · Heavy duty electric motor 3 phase
- Twin pressure gauges show tank and working pressure
- · Cast iron pump for reliability















	PRODUCT	DESCRIPTION	VOLTAGE	MOTOR	MAX PRESSURE	AIR Displacement	GUARANTEED SOUND POWER	WEIGHT	PRICE EX. VAT
1	JEFC270L10B-5.5	270 Litre Compressor	3 Phase (16A)	5.5HP / 4.1kW	10bar / 145psi	702L/min / 24.8cfm	96dB LWA	195kg	
2	JEFC270L10B-7.5	270 Litre Compressor	3 Phase (32A)	7.5HP / 5.5kW	10bar / 145psi	900Lmin / 32cfm	97dB LWA	213kg	
3	JEFC270L10B-10.0	270 Litre Compressor	3 Phase (50A)	10.0HP / 7.5kW	10bar / 145psi	1269L/min / 45cfm	97dB LWA	230kg	

## **TUNDRA 270 LITRE 3 PHASE 10 BAR INDUSTRIAL COMPRESSORS**

- · Heavy-duty cylinders with alloy heads for improved heat dissipation
- · Drive guards offer protection to the fly-wheel and belt assembly
- · Automatic tank condensate draining system
- · Powder-coated tank
- · Fitted with lifting / transport skids & mounting feet
- · Welded tank fully-compliant with the latest European manufacturing & safety standards





Specialist compressor oil which is also suitable for use in rotary screw, vane, vacuum pumps and reciprocating compressors.



	PRODUCT	DESCRIPTION	VOLTAGE	MOTOR	MAX PRESSURE	AIR DISPLACEMENT	GUARANTEED SOUND POWER	WEIGHT	PRICE EX. VAT
1	TUNCIND270L-5.5	270 Litre Compressor	3 Phase (32A)	5.5HP / 4.1kW	10bar / 145psi	647L/min / 22.8cfm	96dB LWA	195kg	
2	TUNCIND270L-7.5	270 Litre Compressor	3 Phase (32A)	7.5HP / 5.5kW	10bar / 145psi	900L/min / 31.8cfm	97dB LWA	213kg	
3	TUNCIND270L-10.0	270 Litre Compressor	3 Phase (50A)	10.0HP / 7.5kW	10bar / 145psi	1269L/min / 45.0cfm	97dB LWA	230kg	

BELT DRIVE

AIR DRYER SYSTEM **ELIMINATES** 

MOISTURE FROM THE AIR SUPPLY

AIR DRYER SYSTEM

ELIMINATES

## **SCREW COMPRESSORS**

## **360 LITRE 10HP SCREW COMPRESSOR/REFRIGERATED DRYER**

- · Belt-driven rotary screw compressor designed for high-capacity continuous, industrial use
- · Pre & after filter
- · Fitted with an efficient heavy duty three-phase electric motor (IE3)
- · Quiet running performance, ideal for environments requiring low noise emissions
- · Powder-coated solid steel cabinet housing with foam noise insulation barriers
- · 100% duty cycle application
- · Air dryer system
- · Automatic time-controlled drain system & easy front end access for maintenance tasks
- · Automatic drain valve
- · Welded tank fully-compliant with the latest European manufacturing & safety standards
- · Schneider switchgear
- · Guaranteed Sound Power Level: 69dB
- · Weight: 460kg





LOW NOISE

OUTPUT









Tank Capacity:	
Voltage:	
Motor:	
Max Pressure:	
Free Air Delivery (F.A.D):	

360L Tank 3 Phase (50A) 10HP / 7.5kW 10.5bar / 152psi 0.97m3/min / 34.3cfm

JEFCIND360S-10.0





Jeffer**so**n

Jefferson

## 500 LITRE 20HP SCREW COMPRESSOR/REFRIGERATED DRYER

- · Belt-driven rotary screw compressor designed for high-capacity continuous, industrial use
- · Pre & after filter
- · Fitted with an efficient heavy duty three-phase electric motor (IE3)
- · Quiet running performance, ideal for environments requiring low noise emissions
- · Powder-coated solid steel cabinet housing with foam noise insulation barriers
- · 100% duty cycle application
- · Automatic time-controlled drain system & easy front end access for maintenance tasks
- · Advanced controller system
- · Welded tank fully-compliant with the latest European manufacturing & safety standards
- · Schneider switchgear
- · Guaranteed Sound Power Level: 69dB
- · Weight: 570kg





10.5bar / 152psi

2.15m3/min / 76cfm



Tank Cap Voltage: Motor:



	JEFCIND500S-20.0			
acity:	500L Tank			
	3 Phase (50A)			
	20HP / 15kW			







**Max Pressure:** 

Free Air Delivery (F.A.D):

## **COMPRESSORS SPARES**



PRODUCT	DESCRIPTION	PRICE EX. VAT
1 JEFLD040	Air Filter for 25L, 50L & Twin Tank	
2 JEFC050V10B230-P026	Air Filter for 50L & 100L V Pump	
3 JEFLD4009-002	Air Filter for 100L & 200L (Screw Type)	
4 JEFC200L10B-P018	Air Filter for 100L, 150L & 200L (Bolt On Type)	
5 JEFLD001	Air Breather for 25L, 50L & Twin Tank	
6 JEFLD048	Compressor Single Phase Pressure Switch for 25L, 50L & Twin Tank	
7 JEFLD050	Compressor Single Phase Pressure Switch c/w lever for 25L, 50L & Twin Tank	
8 JEFLD049	Compressor Three Phase Pressure Switch	
9 JEFLD051	Compressor Air Cock 25 & 50L	
10 JEFLD4009-081	Compressor 1/4" Pressure Gauge compatible with all models	
11 JEFLD4009-062	Compressor 3/8" Pressure Regulator for 100L & 200L	
12 JEFLD022	Compressor Motor Cover 25 & 50L	
13 JEFC150L10B-S028	Compressor 3HP Motor 100, 150 & 200L	
14 JEFLD3008-HEAD	Compressor Head for 100L	
15 JEFC150L10B-S050	Compressor Head/Pump for 150L & 200L	

## **AIR FILTER REGULATORS & LUBRICATORS**

- · Removes moisture from air to protect tools & equipment
- · Auto-draining flotation valve
- · Design includes air pressure pre-set locking control knob & pressure gauge
- · Polycarbonate water trap with metal protector
- · Equipped with wall mounting bracket
- · Pressure Regulation: 0.05 0.85MPa
- · Rated Filtration: 5um
- · Max Supply Pressure: 1.0MPa / 145psi
- · Max. Outlet Pressure: 0.9MPa / 130psi
- · Rated Outlet Pressure: 0.8MPa / 116psi





RECOMMENDED OIL: ISO VG 32 TURBINE 1

PRODUCT	DESCRIPTION	MAX AIRFLOW	DRAIN VALVE OUTLET/ THREAD	PRESSURE GAUGE THREAD	PRICE Ex. Vat
1 JEFFR2000-02	1/4" Outlet Filter Regulator c/w Gauge	550L/min/19cfm	1/4" BSP	1/8" BSP	
JEFFR4000-04	1/2" Outlet Filter Regulator c/w Gauge	4000L/min/141cfm	1/2" BSP	1/4" BSP	
JEFFR5000-06	3/4" Outlet Filter Regulator c/w Gauge	5000L/min/176cfm	3/4" BSP	1/4" BSP	
JEFFR5000-10	1" Outlet Filter Regulator c/w Gauge	5000L/min/176cfm	1" BSP	1/4" BSP	
JEFFRAL2010-02	1/4" Outlet Filter Regulator / Lubricator	500L/min / 18cfm	1/4" BSP	1/8" BSP	
JEFFRAL4010-04	1/2" Outlet Filter Regulator / Lubricator	3000L/min/106cfm	1/2" BSP	1/4" BSP	
2 JEFFRAL5010-06	3/4" Outlet Filter Regulator / Lubricator	4000L/min/141cfm	3/4" BSP	1/4" BSP	
JEFFRAL5010-10	1" Outlet Filter Regulator / Lubricator	4000L/min / 176cfm	1" BSP	1/4" BSP	


## AIRLINE HOSE

## **RUBBER AIRLINE HOSES**

- · Manufactured in accordance with EN 2398
- · Ideal for workshops, garages and bodyshops
- Fitted with 1/4" BSP female swivel unions
- · Max 20bar (290psi) working pressure







## EN2398

	PRODUCT	DESCRIPTION	HOSE DIAMETER	FITTING	PRICE EX. VAT
1	JEFH0SAR08-010	10m Rubber Alloy Airline Hose	8mm	1/4"	
2	JEFHOSAR10-010	10m Rubber Alloy Airline Hose	10mm	3/8"	

## **RUBBER AIRLINE HOSE ROLLS**

- · Manufactured in accordance with EN 2398
- · Ideal for workshops, garages and bodyshops
- · Available in 50m & 100m rolls



## EN2398

	PRODUCT	DESCRIPTION	HOSE DIAMETER	LENGTH	
	JEFHOSAR08-050	NEW! 50m Rubber Alloy Airline Hose	8mm	50m	
1	JEFHOSAR10-050	NEW! 50m Rubber Alloy Airline Hose	10mm	50m	
7	JEFHOSAR08-100K	100m Rubber Alloy Airline Hose	8mm	100m	
12	JEFHOSAR10-100K	100m Rubber Alloy Airline Hose	10mm	100m	



## 15M 3/8" INDUSTRIAL AUTO RETRACTING AIR HOSE

## JEFHOSRLH15-3-8

- Heavy-duty steel construction designed for wall, floor or ceiling mounting, applicable for use in long life industrial and automotive applications
- · Spring located in the middle to ensure stability of the reel
- · Four-direction non-snag hose rollers reduce hose wear
- · Adjustable arm guide (wall, floor, ceiling and pit) and dual pedestal base
- Ball bearing swivel joint structure for easy maintenance and large reduction in the friction between swivel spool and swivel body
- · Auto-rewinding with spring powered recoil
- · Lenath: 15m / 50ft
- · Working Pressure: 28bar / 400psi

## INDUSTRIAL





## 15M 1/2" INDUSTRIAL AUTO RETRACTING AIR HOSE

## JEFHOSRLH15-1-2

- Heavy-duty steel construction designed for wall, floor or ceiling mounting, applicable for use in long life industrial and automotive applications
- · Spring located in the middle to ensure stability of the reel
- · Four-direction non-snag hose rollers reduce hose wear
- · Adjustable arm guide (wall, floor, ceiling and pit) and dual pedestal base
- Ball bearing swivel joint structure for easy maintenance and large reduction in the friction between swivel spool and swivel body
- · Auto-rewinding with spring powered recoil
- · Length: 15m / 50ft
- · Working Pressure: 20bar / 300psi

## INDUSTRIAL





## 10M 3/4" INDUSTRIAL AUTO RETRACTING AIR HOSE

## JEFHOSRLH10-3-4

- Heavy-duty steel construction designed for wall, floor or ceiling mounting, applicable for use in long life industrial and automotive applications
- · Spring located in the middle to ensure stability of the reel
- · Four-direction non-snag hose rollers reduce hose wear
- · Adjustable arm guide (wall, floor, ceiling and pit) and dual pedestal base
- Ball bearing swivel joint structure for easy maintenance and large reduction in the friction between swivel spool and swivel body
- · Auto-rewinding with spring powered recoil
- · Multi-position release ratchet
- · Length: 10m / 32ft
- · Working Pressure: 150bar / 2200psi

## INDUSTRIAL





## 25M 1/4" 360° HIGH-VIS AIR HOSE REEL

## JEFHOSRLHY25-14S

- · Heavy-duty swivel-type hose with all steel frame and spool construction
- · Hose manufactured in accordance with ISO 5774:2016
- · High-visibility design to maximise safety in the working environment
- Air hose manufactured from a kink-resistant rubber hybrid polymer that delivers performance, flexibility & durability - even in cold temperatures as low as -40°C
- $^{\star}\,$  1.6 MPa (16 bar) @ 23°C / 1.1 MPa (11bar) @ 60°C working pressure
- · Fitted with 1/4" BSPT male and quick-release couplings
- · 360° rotary swivel base
- Silicone-free product ideal for bodyshops, professional garages/workshops, as well as agricultural & industrial environments
- · Robust, easy-wind rubber covered handle

## IS05774:2016





## 15M 3/8" AUTO RETRACTING HOSE REEL WITH HIGH-VIS HYBRID HOSE

## JEFHOSRL15-3-8HVP

- Air hose manufactured from a kink-resistant rubber hybrid that delivers performance, flexibility & durability down to temperatures as low as -40°C
- · Working Pressure: 300psi/20bar
- · Hose Length: 15m / 50ft
- · Inlet/Outlet Connection: 1/4" BSPT
- · Reel Casing: Impact-resistant polypropylene
- Operating Temperature Range: -40° to 150°C



## 15M 3/8" AUTO RETRACTING HOSE REEL

## JEFHOSRL15-3-8P

- Retractable air hose reel with industrial steel casing & corrosion-resistant, powder-coated finish
- · Hose manufactured in accordance with ISO2398:2016
- · 20bar / 300psi maximum working pressure
- 1m Fly Lead: with 3/8" BSP Female to 3/8" BSPT Male fittings
- · Outlet Connection: 3/8" BSPT
- · Reel Casing: Steel
- · Weight: 15.25kg

## IS02398:2016



## 15M 1/4" RETRACTABLE HIGH-VIS HYBRID HOSE REEL

## JEFHOSRLHY15-1-4

- $\cdot \ \ \text{Retractable air hose reel with industrial steel casing \& corrosion-resistant, powder-coated finish}$
- · Heavy duty, L-shaped bracket that enables the unit to be wall, floor or ceiling mounted
- $\cdot \ \, \text{Spring-powered, auto-rewind mechanism}$
- $\cdot\,$  Silicone free hose manufactured in accordance with ISO 5774:2016
- $\boldsymbol{\cdot}$  High-vis design to maximise safety in the working environment
- Air hose manufactured from a kink-resistant rubber hybrid that delivers performance, flexibility and durability
- Multi-position ratchet locking bracket with 9-position guide arm & 4 non-snag rollers
- · 1.6MPa (16bar) @ 23°C / 1.1MPa (11bar) @ 60°C
- · Comes complete with 1m fly lead: 3/8" BSP female to 3/8" BSPT male fittings
- · 1/4" BSPT male air outlet
- · Hose diameter: 10mm

## IS05774:2016



## 15M 1/2" RETRACTABLE HIGH-VIS HYBRID HOSE REEL

## JEFHOSRLHY15-1-2

- · Retractable air hose reel with industrial steel casing & corrosion-resistant, powder-coated finish
- ${}^{\textstyle \cdot}{}$  Heavy duty, L-shaped bracket that enables the unit to be wall, floor or ceiling mounted
- · Spring-powered, auto-rewind mechanism
- $\cdot\,$  Silicone free hose manufactured in accordance with ISO 5774:2016
- · High-vis design to maximise safety in the working environment
- Air hose manufactured from a kink-resistant rubber hybrid that delivers performance, flexibility and durability
- · Multi-position ratchet locking bracket with 9-position guide arm & 4 non-snag rollers
- · 1.6MPa (16bar) @ 23°C / 1.1MPa (11bar) @ 60°C
- · 1/2" BSPT male air outlet
- · Comes complete with 1m fly lead; 1/2" BSP female to 1/2" BSPT male fittings
- · Hose diameter: 12.7mm / 1/2"

IS05774:2016





## **60CM HIGH-VIS AIR LEADER** (WHIPLEAD) JEFHOSALHY10-600 · 600mm x Ø10mm leader hose designed to increase the lifespan of the main air hose · Swivel fittings to increase mobility and reduce twisting/stress on the main hose · Supplied with tailpiece and ATTACHED 1/4" BSP Female fittings · Air hose manufactured from a kink-resistant WRENCH WITH rubber hybrid that delivers performance, JEFA023-CD FITTING (PG.31) flexibility & durability - even in cold temperatures as low as -40°C · Manufactured in accordance with ISO 5774:2016 PRICE EX. VAT

## **10M HIGH-VIS HYBRID AIRLINE HOSE 12.7MM DIAMETER**

## JEFHOSAHY12.7-10

- · Hose manufactured in accordance with ISO 5774:2016
- · High-vis design Air hose manufactured from a kink-resistant rubber hybrid that delivers performance, flexibility & durability - even in cold temperatures as low as -40°C
- · 1.6 MPa (16bar) @23°C / 1.1 MPa (11bar) @60°C working pressure
- · Fitted with 1/2" BSP female swivel fittings · Silicone-free product suitable for professional garages, workshops, as well
- as agricultural & industrial environments · Lenath: 10m

IS05774:2016

· Hose Diameter: 12.7mm



1/2" FITTING

IDEAL FOR

IS05774:2016

## **HIGH-VIS HYBRID AIRLINE HOSES**

- · Hose manufactured in accordance with ISO 5774:2016
- · High-vis design to maximise safety in the working environment
- · Air hose manufactured from a kink-resistant rubber hybrid that delivers performance, flexibility & durability down to temperatures as low as -40°C
- · Fitted with 1/4" BSP female swivel unions to reduce hose twist
- · Max 20bar (290psi) working pressure
- · Premium performance
- · Extended service life
- · High visibility to reduce tripping hazard
- · Lightweight for ease of use









PRODUCT	DESCRIPTION HOSE DIAMETER		PRICE Ex. Vat
JEFHOSAHY10-05	5m High-Vis Hybrid Air Hose	10mm	
JEFHOSAHY10-10	10m High-Vis Hybrid Air Hose	10mm	
JEFHOSAHY10-15	15m High-Vis Hybrid Air Hose	10mm	
JEFHOSAHY10-20	20m High-Vis Hybrid Air Hose	10mm	



## PAINT SPRAYING

## **10 LITRE PAINT POT SYSTEM & ACCESSORIES**

## JEFA052-PQT

- · Ideally suited for painting semi-trailers, houses, or any large object that requires a lot of material
- · Suitable for spraying acrylic, 2Pac Paint, and most water based materials
- · Produces up to a 250mm wide spray pattern to get the job done quickly but correctly
- · Average air consumption varies between 6.0-8.8cfm depending on the material you are spraying
- · Heavy Duty Cast Iron Paint Pot
- · Spray Gun (1.8mm Nozzle)
- · Pressure Gauge & Regulator
- Complete with 8m Air Hose and 8m Paint Hose





















## **SUCTION FEED SPRAY GUNS**



- · Suitable for water-based paints
- Ideal for applying base coats & general purpose spraying
- · Adjustable flow and spray pattern controls
- Equipped with aluminium screw-type 750ml suction pot
- · Air Inlet: 1/4"





- · High quality fine atomisation spray gun
- Nozzle size of 1.8mm for paint and filler work
- 100% manually adjustable nozzle sets, ensure consistent, even coverage
- Suitable for use with all water-based paints supplied with standard stainless steel nozzle and needle
- · Air Inlet: 1/4"







	PRODUCT	DESCRIPTION	AIR PRESSURE	AIR CONSUMPTION	CUP Capacity	FLUID Nozzle	PRICE Ex. Vat
1	JEFA046	Suction Feed Spray Gun	50psi / 2bar - 3.4bar	5 - 11cfm	750ml	1.5mm	
2	JEFA050	Professional Suction Feed Spray Gun	30psi - 70psi / 2bar - 4.8bar	7 - 12cfm	1000ml	1.8mm	



Gravity Spray Gun Cup



## **GRAVITY FEED SPRAY GUNS**

- · Teflon seals and No-Rubber O-Ring design
- · Brass air cap, stainless steel needle and tip
- · Enhanced control and efficient coverage
- · Air and paint flow controls for fine spray pattern adjustments
- · Feed Type: Gravity
- · Construction: Nylon Cup Aluminium Die Cast Body

JEFA048-CUP

· Cup Capacity: 600ml / 600cc

**MEDIUM VOLUME** 

**MEDIUM PRESSURE** 

· Air Inlet: 1/4"

· Nozzle Range: 1.0 - 2.0mm

**HVLP Gravity Spray Gun Cup** 

- · Max. Pressure: 6.8bar / 98psi
- · Temperature Range: 5~40°C
- · Weight: 0.7kg

## HIGH VOLUME LOW PRESSURE (HVLP)

## JEFA090B

JEFA047-CUP

- Designed for DIY and professional workshops and ideal for applying base coats and other high-pressure spraying applications
- Ideal for working with most low viscosity materials and suitable for metallic and waterbased paints
- Produces a fine, controlled jet for smooth coverage and a great finish with reduced overspray



## (MVMP) JEFA091G

- Designed for DIY and professional workshops and ideal for mid-pressure spraying applications on a variety of surfaces
- Uses standard pressure which creates a flat and smooth fan pattern ideal to get the best clear finishing coats
- Air cap supplies a strong mist pressure for fast application and extended working distance

## LOW VOLUME LOW PRESSURE (LVLP)

## JEFA092Y

- Ideal for working with thin & waterborne paints, stains, lacquers & varnishes
- Suitable for use with small & low-pressure compressors
- Produces a fine, controlled jet for smooth coverage & a superior finish

	10
41	To all the second
ge & a	
	( n
	PRICE

	PRODUCT	DESCRIPTION	AIR PRESSURE	AIR INLET	AIR CONSUMPTION	CUP CAPACITY	PRICE EX. VAT
1	JEFA090B	HVLP Gravity Feed Spray Gun	1.3mm	220-250 @ 1.3mm	12-14cfm / 350-400lpm	2.0bar / 29psi	
2	JEFA091G	MVMP Gravity Feed Spray Gun	1.4mm	260-280 @ 1.4mm	10.6-12cfm / 300-350lpm	2.5bar / 36psi	
3	JEFA092Y	LVLP Gravity Feed Spray Gun	1.4mm	220-250 @ 1.4mm	8.8-10.6cfm / 250-300lpm	1.5bar / 22psi	

## **22 PIECE SPRAY GUN CLEANING KIT**

## JEFA093

### Includes:

- · 1 x Long handled angle brush
- · 1 x Long handled straight fibre brush
- $\cdot$  1 x Medium sized fibre brush
- $\cdot$  1 x Medium sized wire brush
- · 5 x Fine fibre brushes
- · 2 x Hobby knife holders
- · 6 x Fine points
- · 1 x Plastic handled brush
- · 3 x Detail brushes
- · 1 x Vessel for lubrication oil






## **BLOW GUNS & ACCESSORIES**

## **HIGH-VIS AIRLINE SUZIS**

- · Swivel male 1/4" BSPT ends
- · Pre-treated thread sealant fittings
- · PU material
- · Straight hose ends

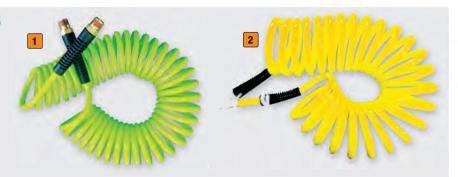

	PRODUCT	DESCRIPTION	INNER Diameter	OUTER Diameter	MAX. WORKING Pressure	FITTING	PRICE EX. VAT
1	JEFA070	7.5m High-Vis Airline Suzi	5mm	8mm	12 bar / 174psi	1/4" BSP	
	JEFA071	15m High-Vis Airline Suzi	5mm	8mm	12 bar / 174psi	1/4" BSP	
2	JEFA072	7.5m Heavy Duty High-Vis Airline Suzi	8mm	12mm	12 bar / 174psi	1/4" BSP	
	JEFA073	15m Heavy Duty High-Vis Airline Suzi	8mm	12mm	12 bar / 174psi	1/4" BSP	



## PARAFFIN SPRAY GUN

## JEFA063

· Includes 1/4" BSPT Male Connection



## **TUNDRA 114MM SHORT BLOW GUN**

## TUNABG114

- · Air blow gun with stainless steel outlet
- · 1/4" (Female) BSP threads
- · Variable speed triggers
- · Soft moulded handle with rubber grip







## **TUNDRA 330MM LONG BLOW GUN**

## TUNABG330

- · Air blow gun with stainless steel outlet
- · 13" long reach stainless steel nozzle
- · 1/4" (Female) BSP threads
- · Variable speed triggers
- Soft moulded handle with rubber grip

INDUSTRIAL





## **36" 6 PIECE AIR BLOW GUN KIT**

## JEFA062

- · Air blow gun with stainless steel nozzle · Set includes:
- · 1/4" (Female) BSP threads
- · Variable speed triggers
- · Soft moulded handle with rubber grip

Set includes:Air blow gun2" nozzle1/4" BSPT adaptor

3x 10" barrel extensions





## **SHORT COMPOSITE PLASTIC NOZZLE BLOW GUN**

## JEFA064

- Made of durable lightweight composite plastic with a reinforced inlet for strength
- · Ergonomically designed handle
- · Angled nozzle easily gets into tight places
- · 1/4" Fitting





## **LONG COMPOSITE PLASTIC NOZZLE BLOW GUN**

## JEFA065

- Made of durable lightweight composite plastic with a reinforced inlet for strength
- · Ergonomically designed handle
- · Angled nozzle easily gets into tight places
- · 1/4" Fitting





## **SHORT PLASTIC BLOW GUN**

## JEFA009

· 1/4" BSP Q/release air inlet





## **LONG PLASTIC BLOW GUN**

## JEFA010

· 1/4" BSP Q/release air inlet





## **SHORT METAL BLOW GUN**

## JEFA011

· 1/4" BSP Q/release air inlet





## **LONG METAL BLOW GUN**

## JEFA012

· 1/4" BSP Q/release air inlet





## **AIR TOOLS**

## **6" PALM SANDER NON-VACUUM**

## JEFPNPLMSD06N

- · Orbit diameter: 5mm
- · Free speed: 11,000rpm
- · Pad size: 6"/150mm
- · Min hose: 10mm
- · Air pressure: 90psi
- · Composite motor housing
- · Well-balanced
- · Low vibration
- · Oil-free
- · Light weight: 0.78kg
- · Low noise emissions: 76dba



PRICE EX. VAT

## 1/4" AIR-HYDRAULIC BLIND RIVETER

## JEFARIVT02H

- · A trigger-operated air hydraulic riveter for aluminium, steel, stainless steel and structural blind rivets from 3/16" to 1/4"
- · With hardened steel jaw assembly and air-actuated vacuum rivet shaft collector
- · Hanging loop for use with balancer
- · Includes two spanners and oil can in a durable carry case
- · Air Consumption: 4cfm
- · Maximum Operating Pressure: 90psi
- · Air Inlet Size: 1/4" BSP
- · Weight: 1.9kg





## PRICE EX. VAT

## **6MM DIE GRINDER** WITH SAFETY LEVER

## JEFPNDIEGR-06SL

- · Free Speed: 22,000rpm
- · Max. Pressure: 90psi
- · Min. Hose: 10mm
- · Collet Size: 1/4" or 1/8"



PRICE EX. VAT

## 1/2" RATCHET WRENCH WITH **AIR REGULATOR**

## JEFPNRTWRH-1-2R

- · 1/2" Drive professional
- · Max. Torque: 14-68Nm
- · Min. Hose: 10mm
- · Adjustable air inlet and exhaust



## 1/2" AIR IMPACT WRENCH

## JEFIW7733

- · Forward & reverse action
- · 5-Step Forward Air / Torque Control
- · Handle exhaust for reduced noise
- · Twin hammer mechanism
- · Anti-slip rubber grip handle
- · Square Drive: 1/2"
- · Torque Range (Forward): 34-680Nm
- · Max Torque (Reverse): 748Nm
- · Blows/min: 1300



PRICE EX. VAT

## 3/4" AIR IMPACT WRENCH

### JEFIW772

- · Drive: 3/4"
- · Torque Range
- (Forward): 200-1300 Nm
- · Max Torque (Reverse): 1300 Nm
- · Blows/min: 1300
- · Free Speed: 5000 rpm
- · Standard Bolt Capacity: M21mm
- · Air Inlet: 1/4"
- · Min. Hose: 1/2"
- · Weight: 4.6kg



## 1" AIR IMPACT WRENCH

### JEFIW797

- · Forward & reverse action
- · 3-Step Forward Air / Torque Control
- · Pinless hammer mechanism
- · Square Drive: 1"
- · Torque Range (Forward):100-1800Nm
- · Max Torque (Reverse): 2600Nm
- · Air consumption: 250L/min
- · Free Speed: 4000rpm · Air Inlet: 1/2"
- · Working Pressure: 6-8bar / 87-116psi
- · Min. Hose: 8\*12mm
- · Net Weight:12.6kg



## 1" AIR IMPACT WRENCH LONG ANVIL

## **JEFIW797-6**

- · Forward & reverse action
- · 3-Step Forward Air / Torque Control
- · Pinless hammer mechanism
- · Square Drive: 1"
- · Torque Range (Forward):100-1800Nm
- · Max Torque (Reverse): 2600Nm
- · Air consumption: 250L/min
- · Free Speed: 4000rpm
- · Air Inlet: 1/2"
- · Working Pressure: 6-8bar / 87-116psi
- · Min. Hose: 8\*12mm
- · Net Weight:12.6kg





## TYRE INFLATORS

## TYRE INFLATING GUN FLEXIBLE CONNECTOR

## JEFG52

- Air Pressure:
   0 174psi / 0 -12bar
- Push fit valve connector
- · 360° turning capacity



# TYRE INFLATING GUN RIGID CONNECTOR JEFG04 - Air Pressure: 0 - 220psi / 0 -15bar - Push fit valve connector - 360° turning capacity

## JUMBO TYRE INFLATORS

- Manufactured with a composite body and dial-type jumbo 80mm gauge with protective rubber casing displaying pressure in bar and psi
- Fitted with rubber hose, valve connector and UK Quick Release air supply fitting

80MM DIAL-TYPE

PRESSURE GAUGE

- · Tested and calibrated to comply with EN 12645:2014
- · Supplied with a serial-numbered calibration certificates
- · Display Type: 80mm Dial-type Pressure Gauge
- Air Supply Connection:
   1/4" Male BSP Thread 1/4" Male (Quick Release)

### EN 12645:2014

- · Reading Accuracy: 2psi / 0.1bar
- · Maximum Inlet Pressure: 15bar / 218psi
- · Minimum Inlet Pressure: 100psi / 7bar
- · Flow Rate: 500L/min @ 13bar
- · Tyre Pressure Range: 0-12bar / 0-180psi
- · Temperature Range: -10°C to 60°C

## **500MM HOSE**

## JEFGTYJTPC07

- · Hose Length: 500mm / 20"
- Tyre Valve Connection:
   Twin Push on / Hold On
- · Weight: 0.9kg
- · Dimensions:

270 x 96 x 120mm



010



500MM HOSE

PRICE EX. VAT

## **2750MM HOSE**

## JEFGTYJCLC08

Hose Length: 2750mm / 108"

· Tyre Valve Connection: Clip On

· Weight: 1.3kg

· Dimensions: 270 x 96 x 120mm

> 80MM DIAL-TYPE PRESSURE GAUGE







PRICE EX. VAT

## TWIN HOLD TYRE INFLATOR CONNECTOR

## JEFGTYCONTH

· 1/4" fitting



PRICE EX. VAT

## **HIGH PRECISION TYRE INFLATOR**

## JEFGTYH03

- Air Pressure:
   0 214psi / 0 -14.5bar
- · Push/pull valve connector
- · 360° turning capacity
- Extra large easy to read gauge
- · Rubber protective bumper









## **MK4 TYRE INFLATOR BY PCL**

## JEFPCLAFG4H03

- Accuracy standards tested to over 400,000 cycles at 100% accuracy
- · Lighter weight new gauge body weighs 923g lightest gauge tested
- New valve mechanism simplified 2 stage mechanism design
- Complies with:
   EC Directive 86/217/EEC
   & BS EN 12645:1999
- Calibration: Pressure gauge range: 0-138lbf/in² & 0-9.6bar (Calibration certificate included)
- Supply Pressure: max 13.8bar / min 6.9bar
- Inflation flow rate: 500L/min / 18cfm







FESSIONAL

## PROFESSIONAL TYRE INFLATORS

- Manufactured with a heavy-duty aluminium body with protective impact resistant rubber bumpers and a stainless steel pressure lever handle
- Fitted with magnified linear pressure gauge, dual-calibrated in psi and bar scales, with parallax correction
- Flexible hose fitted with hanging ring
- Tested and calibrated to comply with EN 12645:2014
- Supplied with a serialnumbered calibration certificate
- · Display Type: Linear
- Air Supply Connection: 1/4" Male BSP Thread - 1/4" Male (Quick Release)
- · Reading Accuracy: 2psi / 0.1bar
- Maximum Inlet Pressure: 200psi / 13.8bar
- Minimum Inlet
  Pressure: 100psi / 7bar
- · Flow Rate: 500L/min @ 13bar
- · Tyre Pressure Range:

0-9.5bar / 0-138psi
• Temperature Range: -10°C to 60°C

## **500MM HOSE**

## JEFGTYLTPC05

- Hose Length: 0.5m / 20"Tyre Valve Connection:
- Twin Hold On







## 2750MM HOSE

## JEFGTYLCLC06

· Hose Length: 2.7m / 108"

Tyre Valve Connection: Clip connectorWeight: 1kg





## **IMPACT SOCKET SETS**

## **8 PIECE IMPACT ADAPTOR SET**

## JEFIADPS12-02

- · 1/2" Drive, 6pt
- · Black oxide finish for improved corrosion resistance

### Includes:

CR-V

· 8 x sockets: 3/8"F x 1/4"M, 1/4"F x 3/8"M, 3/8"F x 1/2"M. 1/2"F x 3/8"M. 1/2"F x 3/4"M, 3/4"F x 1/2"M, 3/4"F x 1"M, 1"F x 3/4"M





## **5 PIECE 1/2" ALLOY WHEEL IMPACT SOCKET SET**

## JEFISOC05A-12

- · 1/2"
- · Cr-MO Steel with anodised finish

## Includes:

 5 x sockets 15mm, 17mm, 19mm, 21mm, 22mm





## **16 PIECE 3/8" DEEP IMPACT SOCKET SET**

## JEFISOC38-01

- · Manufactured from Chrome Vanadium Steel (Cr-V)
- · Black phosphate finish for improved corrosion resistance
- · Suitable for use with impact air wrenches
- · Set supplied in robust moulded carry-case



### Includes:

- · 14 sockets: 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 22mm
- · 2 extension bars: 3" & 6"





## **10 PIECE 1/2" IMPACT SOCKET SET**

## JEFISOC12-03

dddd

- · 1/2" Drive, 6pt
- · Suitable for use with impact air wrenches
- · Set supplied inside a durable metal box







## Includes:

· 10 x sockets: 9, 10, 11, 13, 14, 17, 19, 22, 24, 27mm





## 13 PIECE 1/2" IMPACT SOCKET SET

### JEFISOC12-05

- · 1/2" Drive, 6pt
- · Black oxide finish for improved corrosion resistance

### Includes:

· 13 x sockets: 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24mm











## 10 PIECE 1/2" DEEP IMPACT SOCKET SET

## JEFISOC12-02

- · 1/2" Drive, 6pt Includes:
- · 10 x sockets: 9, 10, 11, 13, 14, 17, 19, 22, 24, 27mm













## 13 PIECE 1/2" IMPACT SOCKET SET

## JEFISOC12-06

- · 1/2" Drive, 6pt
- · Black phosphate finish for improved corrosion resistance
- · Impact resistant and high strength







### Includes:

· 13 x sockets: 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24mm





## 16 PIECE 1/2" DEEP IMPACT SOCKET SET

## JEFISOC12-01

- · 1/2" Drive, 6pt
- · Black phosphate finish for improved corrosion resistance
- · Impact resistant and high strength







### Includes:

· 16 x sockets: 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32mm





## **34 PIECE 1/2" IMPACT SOCKET SET**

## JEFISOC12-04

- · 1/2" Drive, 6pt
- · Black oxide finish for improved corrosion resistance







## Includes:

- · Standard socket: 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32mm
- · Deep socket: 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32mm
- · 1/2" Dr. 125mm Extension Bar
- · 1/2" Dr. Universal Joint





## 13 PIECE 3/4" IMPACT SOCKET SET

## JEFISOC34-01

- · 3/4" Sq Drive, 6pt
- · Metric & Imperial
- · Black oxide finish for improved corrosion resistance

## Includes:

· 13 x sockets: 22, 24, 27, 30, 32, 33, 34, 36, 38mm, 1" 1-1/8", 1-3/8", 1-7/16"















## 10 PIECE 3/4" DEEP IMPACT SOCKET SET

## JEFISOC34-02

- · Black phosphate finish for improved corrosion resistance
- · Suitable for use with impact air wrenches
- · Set supplied in robust moulded carry-case

· 10 x sockets: 24, 27, 30, 32, 33. 34. 36. 38. 41. 46mm







## **8 PIECE 1" DEEP IMPACT SOCKET SET**

## JEFISOC01-02

- · 1" Drive, 6pt
- · Metric
- · Black phosphate finish for improved corrosion resistance

### Includes:

· 8 x sockets: 24, 27, 30, 32, 33, 34, 36, 41mm





PRICE EX. VAT

## 10 PIECE 1" DEEP IMPACT SOCKET SET

## JEFISOC01-01

- · 1" Drive, 6pt
- · Metric & Imperial
- · Black phosphate finish for improved corrosion resistance

### Includes:

· 10 x sockets: 24, 27, 30, 32, 33, 36, 38, 41mm, 1", 1-1/8"











PRICE EX. VAT

## INDUSTRIAL IMPACT WRENCH SOCKET SETS

Introducing our Tundra 6 Point Impact Sockets, engineered for exceptional durability and lasting performance in high torque applications. Constructed from high-strength forged chrome moly steel, they excel in heavy-duty tasks while preventing fastener damage with their non-slip hex geometry. Designed for convenience, the dual-hole Sockets are your reliable choice for demanding jobs.



## **TUNDRA 34 PIECE 1/2" DRIVE** IMPACT SOCKET SET

## TUNISOCS12-34

Tundra impact sockets are high quality alloy steel which provides ultimate strength and durability. Manufactured from Chromium-Molybdenum alloy for extreme impact durability.

- · 6 gripping points for best fit
- · Non-slip geometry to prevent socket and fastener rounding
- · Standard spring-ball locking mechanism
- · Suitable for use on all types of impact tool
- · Supplied in a protective blow-moulded carry case

- · 1/2" Standard Socket: 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32mm
- · 1/2" Deep Socket
- 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32mm
- · 1/2" Impact Extension Bar
- · 1/2" Impact Universal Joint















## TUNDRA 9 PIECE 1/2" DRIVE IMPACT MALE HEX SET

TUNIHEXS12-09M

Tundra impact sockets are high quality alloy steel which provides ultimate strength and durability. Manufactured from Chromium-Molybdenum alloy for extreme impact durability.

- · Standard spring-ball locking mechanism
- · Suitable for use on all types of impact tool
- · Built for higher torque fastening applications
- · Supplied in a protective blow-moulded carry case

## Includes:

- 1x 4mm · 1x 8mm · 1x 14mm • 1x 10mm • 1x 17mm · 1x 5mm
- · 1x 6mm · 1x 12mm · 1x 19mm

INDUSTRIAL









NEW!











**NEW!** 

## **TUNDRA 8 PIECE 1/2" DRIVE** IMPACT ADAPTOR SET

## TUNIADPS12-08

Tundra impact sockets are high quality alloy steel which provides ultimate strength and durability. Manufactured from Chromium-Molybdenum alloy for extreme impact durability. · 1/2" Drive

- · Standard spring-ball locking mechanism
- · Suitable for use with impact air wrenches
- · Converts drive tools to be used various sized drive tools and sockets
- · Set supplied inside a durable blow-moulded box

### Includes:

- · 3/8"F x 1/4"M · 1/2"F x 3/4"M
- · 1/4"F x 3/8"M · 3/4"F x 1/2"M
- · 3/8"F x 1/2"M · 3/4"F x 1"M
- · 1/2"F x 3/8"M · 1"F x 3/4"M













## **TUNDRA 4 PIECE 1/2" DRIVE IMPACT EXTENSION BAR SET**

## TUNIEXTS12-04

Tundra impact sockets are high quality alloy steel which provides ultimate strength and durability. Manufactured from Chromium-Molybdenum alloy for extreme impact durability.

- · Standard spring-ball locking mechanism
- · Suitable for use on all types of impact tool
- · Better access to hard to reach places
- · Extreme impact durability in high torque applications
- · Supplied in a protective blow-moulded carry case

## Includes:

- · 1x 50mm
- · 1x 75mm
- · 1x 100mm
- · 1x 125mm













## INDUSTRIAL IMPACT WRENCH SOCKETS

## TUNDRA 6 POINT SOUARE DRIVE IMPACT SOCKETS

NEW!

Tundra impact sockets are high quality alloy steel which provides ultimate strength and durability. Manufactured from Chromium-Molybdenum alloy for extreme impact durability.

## TUNDRA 1/2" IMPACT SOCKETS

- · 6 gripping points for best fit
- · Non-slip geometry to prevent socket and fastener
- · Standard spring-ball locking mechanism
- · Suitable for use on all types of impact tool
- · Supplied in a protective blow-moulded carry case



1/2" IMPACT SOCKETS PRODUCT SIZE TUNISCI12-10 1/2" 10mm TUNISCI12-13 1/2" 13mm TUNISCI12-15 1/2" 15mm TUNISCI12-17 1/2" 17mm TUNISCI12-19 1/2" 19mm TUNISCI12-24 1/2" 24mm 1 TUNISCI12-30 1/2" 30mm 1/2" 36mm TUNISCI12-36







## TUNDRA 1/2" DEEP IMPACT SOCKETS

- · 6 gripping points for best fit
- · Non-slip geometry to prevent socket and fastener rounding
- Deep wall constuction allows for greater clearance for protruding bolts
- · Standard spring-ball locking mechanism
- · Suitable for use on all types of impact tool
- · Supplied in a protective blow-moulded carry case



1/2" DEEP II	MPACT SOCKET	S
PRODUCT	SIZE	PRICE EX. VAT
TUNISCI12-10D	1/2" 10mm	
TUNISCI12-13D	1/2" 13mm	
TUNISCI12-17D	1/2" 17mm	
TUNISCI12-19D	1/2" 19mm	
TUNISCI12-21D	1/2" 21mm	
TUNISCI12-22D	1/2" 22mm	
TUNISCI12-24D	1/2" 24mm	
TUNISCI12-27D	1/2" 27mm	
TUNISCI12-30D	1/2" 30mm	
TUNISCI12-32D	1/2" 32mm	







## TUNDRA 3/4" IMPACT SOCKETS

- · 6 gripping points for best fit
- · Non-slip geometry to prevent socket and fastener rounding
- · Standard spring-ball locking mechanism
- · Suitable for use on all types of impact tool
- · Supplied in a protective blow-moulded carry case



	3/4" IMPAC	T SOCKETS	
	PRODUCT	SIZE	PRICE EX. VAT
	TUNISCI34-24	3/4" 24mm	
1	TUNISCI34-30	3/4" 30mm	
	TUNISCI34-36	3/4" 22mm	
			The second secon

## INDUSTRIAL CR-MO





## TUNDRA 3/4" DEEP IMPACT SOCKETS

- · 6 gripping points for best fit
- · Non-slip geometry to prevent socket and fastener rounding · Deep wall constuction allows for greater clearance for
- protruding bolts
- · Standard spring-ball locking mechanism
- · Suitable for use on all types of impact tool
- · Supplied in a protective blow-moulded carry case



	3/4 DEEP II	MPAGI SUCKET	3
	PRODUCT	SIZE	PRICE EX. VAT
	TUNISCI34-24D	3/4" 24mm	
	TUNISCI34-27D	3/4" 27mm	
1	TUNISCI34-30D	3/4" 30mm	
	TUNISCI34-32D	3/4" 32mm	
	TUNISCI34-36D	3/4" 36mm	
	TUNISCI34-41D	3/4" 41mm	
	TUNISCI34-46D	3/4" 46mm	

2/4" DEED IMPACT COCKE





DIN 3121 IS01174-2

**NEW!** 

## **TUNDRA 1/2" SQUARE DRIVE IMPACT HEX MALE DRIVERS**

Tundra impact sockets are high quality alloy steel which provides ultimate strength and durability. Manufactured from

Chromium-Molybdenum alloy for extreme impact durability.

- · Standard spring-ball locking mechanism
- · Suitable for use on all types of impact tool
- · Built for higher torque fastening applications



	PRODUCT	SIZE	PRICE EX. VAT
	TUNIHXI12-Q5	Tundra 1/2" Sq. Drive Impact Hex Male Driver 5mm	
	TUNIHXI12-06	Tundra 1/2" Sq. Drive Impact Hex Male Driver 6mm	
	TUNIHXI12-08	Tundra 1/2" Sq. Drive Impact Hex Male Driver 8mm	
1	TUNIHXI12-10	Tundra 1/2" Sq. Drive Impact Hex Male Driver 10mm	
Š	TUNIHXI12-12	Tundra 1/2" Sq. Drive Impact Hex Male Driver 12mm	
	TUNIHXI12-14	Tundra 1/2" Sq. Drive Impact Hex Male Driver 14mm	

## IS01174-2







## TUNDRA 3/4" IMPACT ADAPTORS

Tundra impact sockets are high quality alloy steel which provides ultimate strength and durability. Manufactured from Chromium-Molybdenum alloy for extreme impact

- · Standard spring-ball locking mechanism
- · Suitable for use with impact air wrenches
- · Converts drive tools to be used various sized drive tools and sockets

### IS01174-2











Cr-Mo





**NEW!** 

PRODUCT	DESCRIPTION	PRICE Ex. Vat
UNIADI12M-34F	Tundra 150mm Impact Extension Bar 1/2" Sq. Drive	
UNIADI12F-34M	Tundra 200mm Impact Extension Bar 1/2" Sq. Drive	
UNIADIO1F-34M	Tundra 250mm Impact Extension Bar 1/2" Sq. Drive	

## TUNDRA 1/2" SOUARE DRIVE IMPACT UNIVERSAL SOCKET

## TUNIUNI12

Tundra impact sockets are high quality alloy steel which provides ultimate strength and durability. Manufactured from Chromium-Molybdenum alloy for extreme impact durability.

- · Standard spring-ball locking mechanism
- · Suitable for use on all types of impact tool
- · 15° swivel for access in hard to reach places
- · Non-slip geometry to prevent socket and fastener rounding











Cr-Mo



NEW!

## **TUNDRA 1/2" DRIVE IMPACT EXTENSION BARS**

Tundra impact sockets are high quality alloy steel which provides ultimate strength and durability. Manufactured from Chromium-Molybdenum alloy for extreme impact durability.

- · Standard spring-ball locking mechanism
- · Suitable for use on all types of impact tool
- · Better access to hard to reach places
- · Extreme impact durability in high torque applications

## IS01174-2







## 150mm 200mm

	<u> </u>			
	PRODUCT	DESCRIPTION	LENGTH	PRICE EX. VAT
1	TUNIEXI12-150	Tundra 150mm Impact Extension Bar 1/2" Sq. Drive	150mm	
2	TUNIEXI12-200	Tundra 200mm impact Extension Bar 1/2" Sq. Drive	200mm	
3	TUNIEX112-250	Tundra 250mm Impact Extension Bar 1/2" Sq. Drive	250mm	



## AIR FITTINGS

## **JEFFERSON® HIGH FLOW FITTINGS**

















10







	PRODUCT	DESCRIPTION	PRICE Ex. Vat
1	JEFA026-CD	1/4" x 1/4" BSPT Male Plug (2 Pack)	
2	JEFA027-CD	1/4" x 3/8" BSPT Male Plug (2 Pack)	
3	JEFA028-CD	1/4" x 3/8" BSP Female Plug (2 Pack)	
4	JEFA029-CD	1/4" x 1/2" 10mm Hose Barb Coupler	
5	JEFA030-CD	1/4" x 1/2" 8mm Hose Barb Plug (2 Pack)	
6	JEFA031-CD	1/4" x 1/4" BSP Female Coupler	
7	JEFA032-CD	1/4" x 3/8" BSP Female Coupler	
8	JEFA033-CD	1/4" x 1/4" BSPT Male Coupler	
9	JEFA034-CD	1/4" x 3/8" BSPT Male Coupler	
10	JEFA059-CD	3/8" BSP Male Locking Quick Release Coupling	
11	JEFA060-CD	1/4" BSP Male Screwed Swivel Adaptor	

## **PCLAIR FITTINGS**





























	PRODUCT	DESCRIPTION	PRICE EX. VAT
1	JEFPCLAC21CF	Rp 1/4" Female Airflow Coupling	
2	JEFPCLAC21CM	R 1/4" Male Airflow Coupling	
3	JEFPCLAC5EF	Rp 3/8" Female Coupling 100 Series	
4	JEFPCLAC5EM	R 3/8" Male Coupling 100 Series	
5	JEFPCLACA2593	Rp 1/4" Male Standard Adaptor	
6	JEFPCLACA2746	Rp 1/4" Female Standard Adaptor	
7	JEFPCLACA2999	R 3/8" Male Adaptor 100 Series	
8	JEFPCLHC20031-4	Rp 1/4" Female Equal Tee	
9	JEFPCLHC25431-2	Rp 1/2" Female - Female Parallel Socket	
10	JEFPCLAC5JF	Rp 1/2" Female Coupling 100 Series	
11	JEFPCLAC5JM	Rp 1/2" Male Coupling 100 Series	
12	JEFPCLACA3035	R 1/2" Male Adaptor 100 Series	
13	JEFPCLACA3036	12.7mm / 1/2" Hose Tailpiece 100 Series	
14	JEFPCLHC6889	Rp 1/4" Female - Female Parallel Socket	

## **JEFFERSON® AIR FITTINGS**



	PRODUCT	DESCRIPTION	PRICE EX. VAT
1	JEFA001-CD	1/4" Female Q/Release to 1/4" Female Thread	
2	JEFA002-CD	1/4" Female Q/Release to 1/4" Male Thread	
3	JEFA003-0.8-CD	8mm Hose to 1/4" Male Q/Release Coupling (2 Pack)	
4	JEFA004-CD	1/4" Male Q/Release to 1/4" Female Thread (2 Pack)	
5	JEFA005-CD	1/4" Male Thread to 1/4" Male Q/Release (2 Pack)	
6	JEFA006-CD	8mm Barbed To 1/4" Male Thread	
7	JEFA007-CD	11mm Barbed To 1/4" Male Thread (2 Pack)	
8	JEFA008-CD	Twin Coupling 1/4" Female to 2 x Female Q/Release	
9	JEFA021-CD	Double Hose Barb 8mm (2 Pack)	
10	JEFA022-CD	Conical Reduction 1/2" Male To 1/4" Female (2 Pack)	
11	JEFA023-CD	Cylindrical Nipple 1/4" Male To 1/4" Male (2 Pack)	
12	JEFA024-CD	1/4" Female Q/Release to 8mm Barbed Hose	
13	JEFA025-CD	1/4" x 3/8" BSP Female Coupler	
14	JEFA054-CD	Z-Swivel Air Connector 1/4" BSP	
15	JEFA055-CD	Lever Ball Valve	
16	JEFA056-CD	1/4" Screwed Swivel Adaptor	
17	JEFA057-CD	3 Piece Male Air Tool Coupling Kit	
18	JEFA061-CD	3 Piece Female Air Tool Coupling Kit	

## MIG WELDING



- · Portable MIG Welder
- Ideal for DIY & garage use
- · Produces stable arc striking and minimal spatter

Our professional range of autoMIG welders all feature a heavy-duty high output transformer and forced air cooling to maximise duty cycle performance. Supplied set up in gas mode. Use in gasless mode will require the purchase of a spool of fluxed cored wire, a pack of 1.0mm tips.

## WELDING

Disposable gas bottle for use with Jefferson MIG Welders and other leading MIG welder brands... find it on page 40



## **GAS/GASLESS MIG WELDERS (230V)**

## JEFMIG151-AM

- · Input Voltage: 230V Single Phase
- · Gas Type: CO2 / Argon Mix & Argon & CO2
- · Wire Capacity: 5-15kg
- · Cooling System: Forced Air
- · Torch: Non-live
- · Welding Wire Diameter: 0.6 0.9mm
- Max. Input Capacity: 5.5kVA
- Output Current Range: 30-151A
- · Rated Output Current: 50-150A
- Rated Duty Cycle: 100% @ 50A 60% @ 80A 15% @ 150A

- · Dimensions: 720 x 320 x 540mm
- · Weight: 21.2kg

### Includes:

- · 1.8m 10mm2 160A Earth cable with clamp
- · 1m Gas hose
- · 1.8m MIG welding torch
- · Hand held face shield
- · Hammer & brush comb





## JEFMIG185-AM JEFMIG215-AM

- · Input Voltage: 230V Single Phase
- · Gas Type: CO2 / Argon Mix & Argon & CO<sub>2</sub>
- · Wire Capacity: 5-15kg
- · Cooling System: Forced Air
- · Torch: Non-live

## Includes:

- · 2.5m 16mm² 300A Earth cable with clamp
- · 1.4m Gas hose
- · 2 x Hose clamps
- · 250Amp 3m Binzel type torch
- · Argon gas regulator





INCLUDES ARGON GAS REGULATOR



	PRODUCT	DESCRIPTION	WELDING WIRE DIAMETER	MAX. INPUT CAPACITY	OUTPUT Current Range	RATED OUTPUT CURRENT	RATED DUTY CYCLE	POWER SUPPLY CIRCUIT BREAKER	DIMENSIONS	WEIGHT	PRICE EX. VAT
1	JEFMIG185-AM	185 Amp Gas/ Gasless MIG Welder (230V)	0.6 - 0.8mm	7.35kVA	35-180A	90-185A	60% @ 90A 30% @ 130A 15% @ 185A	32A	800 x 460 x 675mm	42kg	
2	JEFMIG215-AM	215 Amp Gas/ Gasless MIG Welder (230V)	0.6 - 0.8mm	8.95kVA	40-215A	100-215A	60% @ 100A 30% @ 145A 15% @ 215A	32A	800 x 460 x 675mm	44kg	

JEFFERSON® WELDERS SHOULD BE FITTED WITH THE CORRECT PLUG. FAILURE TO COMPLY WITH THIS INSTRUCTION WILL VOID WARRANTY

## **AUTOMIG CONSUMABLES (150AMP)**



	PRODUCT	DESCRIPTION	PRICE EX. VAT
1	JEFTIPBZ15-0.6	0.6mm Tip MB15 Binzel Torch (5 Pack)	
1	JEFTIPBZ15-0.8	0.8mm Tip MB15 Binzel Torch (5 Pack)	
1	JEFTIPBZ15-1.0	1.0mm Tip MB15 Binzel Torch (5 Pack)	
2	JEFNOZBZ15	Nozzle MB15 Binzel Torch (3 Pack)	

## **AUTOMIG CONSUMABLES (250AMP)**



PRODUCT	DESCRIPTION	PRICE EX. VAT
1 JEFTIPBZ25-0.8	0.8mm Tip MB25 Binzel Torch (5 Pack)	
1 JEFTIPBZ25-1.0	1.0mm Tip MB25 Binzel Torch (5 Pack)	
JEFN0ZBZ25	Nozzle MB25 Binzel Torch (3 Pack)	



Suitable for a wide range of welding jobs and widely used due to their reliability, these Jefferson MIG weldtime. The range includes 2-roll and 4-roll wire feeder options and each are fitted with anti-dust protection. Robust housing and complete with handle and castor wheels for manoeuvrability. All JefMIG welders come complete with MIG torch, argon regulator and 3m earth lead plus full copper transformers.

## 225 AMP MIG WELDER (230V)

## KIT-JEFMIG225

- · Input: 230V / 32A
- · Output: 225Amp
- · Wire Feed: 2 Roll
- · Welding Wire Diameter: 0.6-1.0mm
- · Voltage Steps: 6
- · Dimensions (LxBxH): 830 x 440 x 760mm
- · Large cabinets allow for full height gas cylinders
- · Heavy duty front and read wheels
- · Forced air fan cooling
- · Double cupport straps for gas cylinder
- · Variable wire speed
- · Spot weld timer
- · Geared 4-roll wire feeder

Comes complete with: · Argon Regulator

- · 3m Earth Lead
- · 250Amp Binzel Type MIG Torch

NEW **UPDATED** MODEL



## 275 AMP MIG WELDER (230V)

## KIT-JEFMIG275

- · Input: 230V / 32A
- · Output: 275Amp
- · Wire Feed: 4 Roll
- · Welding Wire Diameter: 0.6-1.2mm
- · Voltage Steps: 12
- · Dimensions (LxBxH): 830 x 440 x 760mm
- · Large cabinets allow for full height gas cylinders
- · Heavy duty front and read wheels
- Forced air fan cooling
- · Double cupport straps for gas cylinder
- · Variable wire speed
- · Spot weld timer
- · Geared 4-roll wire feeder



- · Argon Regulator
- · 3m Earth Lead
- · 250Amp Binzel Type

MIG Torch

NEW **UPDATED** MODEL



















JEFFERSON® WELDERS SHOULD BE FITTED WITH THE CORRECT PLUG. FAILURE TO COMPLY WITH THIS INSTRUCTION WILL VOID WARRANTY

## **TUNDRA 300AMP COMPACT MIG WELDER (SINGLE PHASE)**

## KIT-TUNMIG-300C

- · 100% Copper transformers
- · Supply voltage: 230V/240V
- · Supply frequency: 50/60Hz
- · Supply current: 32A
- · Welding range: 30-300A
- · No load voltage: 15.8-37.3V
- · Duty cycle: 100% 160A 60% - 220A
- 50% 300A · Voltage steps: 16
- · Welding wire Ø: 0.8mm - 1.2mm
- · Protection: IP21
- · Insulation class: H
- · Cooling: AF
- · Dimensions (LxWxH): 870 x 490 x 820mm
- · Weight: 72kg

100%









## INDUSTRIA

## **TUNDRA 300AMP MIG WELDER (SINGLE PHASE)**

## KIT-TUNMIG-300

## Base Unit:

- · 100% Copper transformers
- · Supply voltage: 230V, 50Hz
- · Max Supply current: 42A
- · Supply power: 9.6kVA
- · Supply current: 32A
- · Welding range: 30-300A
- · No load voltage: 15.8-37.3V
- · Duty cycle: 100% 160A 60% - 220A
  - 50% 300A
- · Voltage steps:16
- · Welding wire Ø: 0.8mm - 1.6mm
- · Protection: IP21
- · Insulation class: H
- · Cooling: AF
- · Dimensions (LxWxH): 865 x 495 x 690mm
- · Weight: 68kg

## **Head Unit:**

- · Motor: 42V AC
- · Supply power: 100W
- · Welding range: up to 300A · Welding wire Ø: 0.8mm - 1.6mm
- · Protection: IP23
- · Insulation class: H
- · Driven rolls: 4
- · Wire speed: 1 20m/min
- · Rolls diameter: 30mm





VARIABLE DIGITAL DISPLAY FOR VOLTAGE & AMPAGE



PRICE EX. VAT

JEFFERSON® WELDERS SHOULD BE FITTED WITH THE CORRECT PLUG. FAILURE TO COMPLY WITH THIS INSTRUCTION WILL VOID WARRANTY

# PLASMA CUTTERS

# **40AMP PLASMA CUTTER (DUAL VOLTAGE)**

#### JEFPLAS40A-DV

- · Input Voltage ~ Frequency: 230V / 110V ~ 50Hz
- · Maximum Amp Output: 40A (@230V) 20A (@110V)
- · Cutting Capacity: 25mm
- · Open Circuit Voltage: 300V
- · Duty Cycle: 230V: 40A @ 30% 110V: 20A @ 60%
- · Torch Cable Length: 6m
- · Working Pressure: 80-110psi
- · Display: Analogue
- · Cable / Plug:
- 4m x 2.5mm 3 core / 16A
- · Dimensions: 582 x 343 x 381mm
- · Weight: 9.6kg















# **TUNDRA 45AMP PLASMA CUTTER (DUAL VOLTAGE)** TUNPLAS45A-DV · Input Voltage ~ Frequency: 230V / 110V ~ 50Hz

- · Maximum Amp Output: 45A (@230V) 20A (@110V)
- · Cutting Capacity: 28mm
- · Open Circuit Voltage: 300V
- · Duty Cycle:
- 230V: 45A @ 30% 110V: 20A @ 60%



## PT60 60A 6M PLASMA TORCH

TUNDRA

DUAL

# JEFPLASPT60-TCH PRICE EX. VAT

# PLASMA TORCH CONSUMABLES



JEFFERSON® PLASMA CUTTERS SHOULD BE FITTED WITH THE CORRECT PLUG. FAILURE TO COMPLY WITH THIS INSTRUCTION WILL VOID WARRANTY

# ARC WELDING

# **140 AMP MINI ARC WELDER (230V)**

## JEFARC140M-230

- · Insulated Gate Bipolar Transistor (IGBT) technology
- · Integrated smart fan cooling system with thermostat
- · Includes Voltage Reduction Device (VRD) for improved electrical safety
- · Arc force / MMA welding
- · Hot start
- · Includes 2m earth clamp lead and 3m electrode holder · Weight: 3.2kg
- · Generator friendly

- · Compatible with 1.6-4.0mm electrodes
- · Input: AC 230V
- Output: 20-140A
- Rated Input Current: 13A
- · Duty Cycle: 60% @ 90A, 25% @ 140A
- · Frequency: 50Hz
- Dimensions: 260 x 185 x 110mm











# 160 AMP ARC TIG INVERTER WELDER (230V)

#### JEFTARC160-230

- · Features a Lift TIG Function
- · Digital LED Display
- · Hot Start
- · Arc Force
- · Overheat Protection
- · Generator Friendly
- · Duty Cycle: 40% @ 160A
- · Compatible with 2.5, 3.2, 4.0mm electrodes · Protection Class: IP21S
- · Voltage: 230V
- · Frequency: 50Hz
- · Rated Input Current: 16A

- · No Load Voltage: 60V
- · No Load Loss: 50W
- · Output Current Range: 30-160A
- · Efficiency: 85%
- · Power Factor: 0.73
- · Cable Connections: 35 x 50mm
- · Insulation Class: F
- · Weight: 8kg
- · Dimensions:

430 x 150 x 390mm











# **160 AMP ARC TIG INVERTER WELDER** (DUAL VOLTAGE)

#### JEFTARC160-DV

- · Equipped with the latest IGBT inverter technology
- · Anti-stick, arc-force, hot start, minimal spatter & high efficiency
- · Thermal overload cut-out and LED indicator
- · Generator-friendly with auto-correction for voltage fluctuation (+/- 15%)
- · Compact, lightweight and robust in durable moulded casing and carry handleIngress Protection: IP21 / S
- · Electrode Capacity: 1.6 4.0mm
- · Display: Analogue
- · Cable: 4m x 2.5mm 3 core
- · Connections: 35/50 Dinze
- · Dimensions: 310 x 140 x 210mm
- · Weight: 7.9kg

- Current Range: 230V: 10-160A 110V: 10-90A
- Duty Cycle: 230V: 160A @ 30% 110V: 90A @ 25%
- · No Load Voltage: 230V: 90.2V 110V: 86.5V
- · Max Input Current: 230V: 32A 110V: 36.5A

# Clamp

Includes:

Blow Moulded Carry Case

5m x 16mm Electrode Holder 3m x 10mm Earth Lead & 200A

# MMA/Arc Welding:

- ☑ Carbon Steel
- ☑ Low Alloy Steel
- ☑ Stainless Steel
- ☑ Cast Iron

## TIG Welding:

- ☑ Carbon Steel
- ☑ Low Alloy Steel
- ☑ Stainless Steel ✓ Cast Iron
- ☑ Titanium
- ☑ Copper
- ✓ Brass

PRICE EX. VAT











JEFFERSON® WELDERS SHOULD BE FITTED WITH THE CORRECT PLUG. FAILURE TO COMPLY WITH THIS INSTRUCTION WILL VOID WARRANTY

# TIG WELDING

# **160 AMP HIGH FREQUENCY PULSE TIG WELDER (230V)**

#### KIT-JEFTP1600-230

- · Input: 230V 16A
- · Output: 160Amp
- · Comes with a 3m earth lead and 200Amp TIG Torch
- · Duty Cycle: 25% @ 160A
- · Dimensions: 400 x 140 x 230mm
- · Weight: 7.5kg



HIGH-FREQUENCY PULSE TIG







# **180 AMP HIGH FREQUENCY TIG** WELDER (230V)

#### KIT-JEFTIG1800-230

- · Input: 230V 32A
- · Output: 180Amp
- · Comes with a 3m earth lead and 200Amp TIG Torch
- · Duty Cycle: 40% @ 180A
- · Dimensions: 400 x 140 x 230mm
- · Weight: 8.0kg



HIGH-FREQUENCY TIG









# **200 AMP HIGH** FREQUENCY TIG WELDER (DUAL VOLTAGE)

#### KIT-JEFTIG2000-DV

- · Input: 110V 32A / 230V 32A
- · Output: 200Amp
- · Comes with a 3m earth lead and 200Amp TIG Torch
- · Duty Cycle: 25% @ 200A
- · Dimensions: 400 x 140 x 230mm
- · Weight: 9.5kg







HIGH-FREQUENCY TIG





# TUNDRA AC/DC 320AMP TIG WELDER (3 PHASE)

# KIT-TUNTIG320AC-DC

TIG AC/DC welding machines are specifically designed to achieve perfect aluminium and aluminium alloy welding with alternating current. In DC mode they can also weld other metals such as stainless steel, mild steel, alloy steel, titanium and copper alloys. Coated electrodes - MMA welding is possible in either AC or DC with digital polarity change. Switchable HF arc ignition, 2-step/4-step/two level 4-step mode, 500 Hz DC pulse, AC pulse, 4 different AC forms and memory for operator's own settings. Options include remote control, foot pedal and TIG cold wire feeder.

- · Supply voltage: 415V
- · Supply current: 32A
- · Welding current: 5-320A
- · Duty cycle: 35%
- · DC pulse frequency: 0.5-500Hz
- · AC frequency: 35-250Hz
- · AC pulse frequency: 0.5-10Hz
- · Dimensions: 540 x 250 x 480mm
- · Weight: 30kg





JEFFERSON® WELDERS SHOULD BE FITTED WITH THE CORRECT PLUG. FAILURE TO COMPLY WITH THIS INSTRUCTION WILL VOID WARRANTY

# GAS & ACCESSORIES

# **CO2 WELDING GAS** 600G / 1L

#### JEFGASC020600

- · Disposable gas bottle for use with Jefferson MIG Welders and other leading MIG welder brands
- · Suitable for welding thin sheet metal / mild steel
- · Volume: 950cc
- · Pressure: 36bar at 0°
- · Contents: 600a

## DO NOT REFILL



# CO2 / ARGON MIX **WELDING GAS 110L**

#### JEFGASMIX110L

- · Disposable gas bottle for use with Jefferson MIG Welders and other leading MIG welder brands
- · Suitable for welding thin sheet metal / mild steel
- · Volume: 950cc
- · Pressure: 110bar at 20°
- · Contents: 110 Litre

#### DO NOT REFILL



# CO2 WELDING GAS 1200G / 2L

## JEFGASC021200

- · Disposable gas bottle for use with Jefferson MIG Welders and other leading Jefferson MIG welder brands
- · Suitable for welding thin sheet metal / mild steel
- · Volume: 2200cc
- · Pressure: 110bar at 20°
- · Contents: 1200a





# **PROPANE GAS** 400G/14.10Z

## JEFGASPR00400

- · Ph28bar, PQW 16
- · UN.1978 IM02.1
- · FLAMMABLE, N.O.S (Dimethylmethane)





# **MAPP GAS 3600°F** 400G/14.10Z

#### JEFGASMAP0453

- · Ph28bar, PQW 13
- · UN.1077 IM02.1
- · Liquefied Gas
- · FLAMMABLE, N.O.S (Methyl Acetylene & Propadiene Mixtures, Stabilized)







# **OXYGEN GAS** 145G/5.00Z

#### JEFGASOXY0145

- · Disposable bottle 110L of oxygen at medium pressure (110 bar)
- · Suitable for gas welding and brazing
- · Volume: 950cc
- · Pressure: 110bar at 20°

DO NOT REFILL







# WEED BURNER **JEFPROWEDBRN**

**PROPANE GAS** 

- · Chemical-free weed killing
- · Piezo self ignition
- · High output burner head
- · 35" long arm
- · Adjustable flame knob
- · Ergonomic anti-slip handle
- · Defrost frozen water pipes

COMPATIBLE WITH MULTIGAS 7/16'



Temperature °C:	1850
Gas Consumption (g/h):	393
Burner Power (kW):	5.5
Number of Burners:	1
Burner Diameter:	25mm

PRICE EX. VAT

#### **PROPANE TORCH MULTI KIT WITH 2M HOSE**

# JEFPROTRHMKIT

- · Zinc plated propane torch
- · 3x burners: 25, 35 & 50mm
- · Max Temperature: 1800°C
- · Heat insulated handle



Temperature °C: Gas Consumption (g/h): Burner Power (kW): Number of Burners:

Burner Diameter:

2000 / 450 / 265 28 / 6.3 / 3.7

3 50 / 35 / 25mm





# NEW! INDUSTRIAL GAS TORCH **JEFGASTORCHIND** Designed for a wide range of jobs including soldering & brazing copper pipes, automotive repair, loosening rusted nuts and many other heat-treating applications. · Dead man's trigger function · 100% flash tested · Burner Diameter: 15mm · Burner Length: 64mm · Compatible Gas Type: MAPP & Propane · Connection Size: 1 · Max. Heat Output: 2300 kW · Max. Temperature: 2400°C · Working Pressure (bar): 0-3.5bar · Working Pressure: 250 g/hr

MAPP & OXYGEN **BRAZING KIT** 

|||| INFERNO\*\*

INDUSTRIAL

WARNING:

NOT

SUITABLE FOR

**ACETYLENE** 

## **JEFGASBRAZKIT**

EN12205,

- · CGA 600 MAPP connection & M12 Thread Oxygen Cylinder
- · Can be used for soldering, brazing, plumbing, and HVAC work.
- · Features an adjustable flame and is perfect for cutting steel, brazing and light welding
- · Advanced control system allows for precision flame with dual flashback arrestors
- · Durable brass burn wand.
- Max. Temp: 3000°C

#### Includes:

- · 1x M10 Adaptor
- · 3x Nozzles
- · 1x Sparker
- 1x Safety Glasses
- · 1x Mapp Bottle
- · 1x Oxygen Bottle
- · 1x Torch
- · 1x Metal Carry Case



NOT SUITABLE FOR **ACETYLENE** 

INFERNO"

WARNING:

PRICE EX. VAT

PRICE EX. VAT

NEW!

# **SOLDERING & BRAZING GAS TORCH**

#### JEFGASTORCH

- · Push-button for trigger start, Piezo self-igniting system
- · 360° swivel flametube design
- · Compatible with Propane, Mapp® Mapp/Pro™ gases & MT-1 & PT-1 fuel containers
- · Brass tip, built-in gas regulator & safety trigger lock

## Propane (JEFGASPR00400)

- · Soft solder: 19mm 76mm
- · Brazing: 6mm 19mm

#### MAPP (JEFGASMAP0453)

- · Soft solder: 19mm 102mm
- · Brazing: 6mm 32mm



EN12205, 1354

|||INFERNO"



**SOLDERING & BRAZING GAS TORCH & MAPP GAS KIT** 

## **JEFGASTORCHKIT**

- · JEFGASTORCH Soldering & Brazing Gas Torch
- · JEFGASMAP0453 MAPP Gas -FLAMMABLE, N.O.S (Methyl Acetylene & Propadiene Mixtures, Stabilized)



\*WARNING: NOT SUITABLE FOR ACETYLENE





PRICE EX. VAT

# **GAS TORCH EXTENSION HOSE 1.5M**

## JEFGAST-EXT1.5

- · CGA 600 Standard torch connection
- · Gas flow control knob
- · 1.5m reinforced gas hose



PRICE EX. VAT

NEW!

## SOLDERING MAT

# **JEFMATSOL**

- · Prevents burn damage when soldering or brazing
- · Fibreglass material
- · Max. Temperature: 1200°C
- · Dimensions: 200 x 300mm

**NEW SOLDERING IRON ON PAGE 135** 





# **PROPANE GAS REGULATOR**

# JEFPROREG-F



#### FEMALE CONNECTOR FOR EUROPE & ROI



MALE CONNECTOR

FOR UK ONLY

- · Max temperature: 50°C
- · Flow rate: 8.0kg
- · Operation pressure: 0.5 4bar
- · Inlet connector: G5/8" LH
- · Outlet connector: G3'/8" LH

PRICE EX. VAT

# **ARGON REGULATOR**

#### JEFRGR-ARG

- · Input pressure: 300bar
- Output pressure: 30L/min
- · Gauge pressure range: Input: 400bar Output: 40L/min
- · Inlet connector: G5/8"-14
- · Outlet connector: G3'/8"-19



PRICE EX. VAT

# **ACETYLENE GAS REGULATOR**

#### JEFRGR-ACE

- · Input pressure: 25bar
- · Output pressure: 1.5bar
- · Gauge pressure range: Input: 40kg/cm<sup>2</sup> Output: 2.5kg/cm<sup>2</sup>
- · Inlet connector: G5/8"-14LH
- · Outlet connector: G3'/8"-19LH



PRICE EX. VAT

# **ARGON REGULATOR SIDE ENTRY**

## JEFRGR-ARG-SE

- · Input pressure: 300bar
- · Output pressure: 30L/min
- · Gauge pressure range Input: 400bar Output: 40L/min
- · Inlet connector: G5/8"-14
- · Outlet connector: G3'/8"-19



PRICE EX. VAT

# **PROPANE GAS REGULATOR**

# JEFRGR-PRO

- · Input pressure: 25bar
- · Output pressure: 4bar
- · Inlet connector: 5/8" BSP LH
- · Outlet connector: 3/8" BSP LH



PRICE EX. VAT

## **OXYGEN REGULATOR**

#### JEFRGR-OXY

- · Input pressure: 300bar
- · Output pressure: 10bar
- · Gauge pressure range Input: 400kg/cm<sup>2</sup> Output: 16kg/cm<sup>2</sup>
- · Inlet connector: G5/8"-14
- · Outlet connector: G3'/8"-19



PRICE EX. VAT

# **GAS FITTINGS**















	PRODUCT	DESCRIPTION	EX. VAT
1	JEFCOUP1-4L	1/4" Coupler Left Hand Straight (each)	
2	JEFCOUP1-4R	1/4" Coupler Right Hand Straight (each)	
3	JEFCOUP3-8L	3/8" Coupler Left Hand Straight (each)	
4	JEFCOUP3-8R	3/8" Coupler Right Hand Straight (each)	
5	JEFNUTU1-4L	1/4" Left Hand Union Nut (each)	
6	JEFNUTU1-4R	1/4" Right Hand Union Nut (each)	
7	JEFNUTU3-8L	3/8" Left Hand Union Nut (each)	
8	JEFNUTU3-8R	3/8" Right Hand Union Nut (each)	
9	JEFSPLICER1-4	1/4" Splicer (each)	
10	JEFSPLICER5-16	5/16" Splicer (each)	
11	JEFTAIL14-14	Tail 1/4" Bore x 1/4" Nut (each)	
12	JEFTAIL14-38	Tail 1/4" Bore x 3/8" Nut (each)	
13	JEFTAIL38-38	Tail 3/8" Bore x 3/8" Nut (each)	

# WELDING WIRE & ELECTRODES

# SG2 SOLID MIG WELDING WIRE - 0.7KG & 5KG

Mild steel welding wire is widely used in ship, vehicle, bridge, engineering machinery and various other fields. Mild steel welding wire is highly anti-corrosive, it uses CO<sub>2</sub> gas shielded welding and is widely applied in marine boilers, marine pielines and marine cargo manufacturing industries. Our SG2 solid wire mild steel welding wire is coated with a copper layer for high anti-corrosion. Available in 0.7kg & 5kg spools.







CE 0035 14, EN ISO 14341-A-G42 3 C1 3SI1, EN13479:2006

# SG2 SOLID MIG WELDING WIRE - 15KG

Mild steel welding wire is widely used in ship, vehicle, bridge, engineering machinery and various other fields. Mild steel welding wire is highly

anti-corrosive, it uses  ${\rm CO}_2$  gas shielded welding and is widely applied in marine boilers, marine pipelines and marine cargo manufacturing industries. Our SG2 solid wire mild steel welding wire is coated with a copper layer for high anti-corrosion.



SG2 SOLID WIRE



# 0.9MM FLUX CORED WELDING WIRE - 0.9KG

## JEFWP0.9-0.9FC

- · Manufactured to BS EN ISO14341:2008
- Suitable for use with the Jefferson autoMIG 151A gas/no gas welder (JEFMIG151-A) and other gas/no gas welders
- · Ideal for a range of industry uses



PRICE EX. VAT

## **WELDING RODS**

A versatile, deep penetrating steel electrode with smooth, stable arc characteristics. It is used for the welding of mild steels, galvanized and some low alloy steels. The coating produces a forceful, spray-type arc, resulting in deep penetrating welds. The slag is thin and easily removable.

Class E6013 blue rutile coated electrodes suitable for welding Carbon and C-Mn steels with medium mechanical properties. Typical Application: Vehicles, ship building and repair, sheet metal, build-up of over machined and worn mild steel surfaces, general light fabrication.

- · Soft arc therefore suitable for relatively thin plates and bridging wide gaps
- All position electrode including vertical down
- · Rutile general purpose



PRODUCT	DESCRIPTION	PRICE Ex. Vat
JEFWR2.5-2.5KG	2.5 x 350mm Welding Rods	
JEFWR3.2-2.5KG	3.2 x 350mm Welding Rods	
JEFWR4.0-2.5KG	4.0 x 350mm Welding Rods	


# MIG TORCHES

## **BINZEL TYPE MIG TORCH**

· Available in a range of lengths snd amperages




# BINZEL TYPE 250AMP MIG TORCH CONSUMABLES



	PRODUCT	DESCRIPTION	PRICE EX. VAT
1	JEFTORBZ2506	Tip Holder M6	
2	JEFTORBZ2504-08	0.8mm Tip M6	
2	JEFTORBZ2504-10	1.0mm Tip M6	
2	JEFTORBZ2504-12	1.2mm Tip M6	
3	JEFTORBZ2508	Gas Nozzle 15mm bore	
	JEFTORBZ2524-50	Steel Liner 1.0mm-1.2mm x 5m	
	JEFTORBZ2513-50	Teflon Liner 1.0mm-1.2mm x 5m	

# BINZEL TYPE 360AMP MIG TORCH CONSUMABLES




	PRODUCT	DESCRIPTION	PRICE EX. VAT
1	JEFTORBZ3614	Tip Holder M8	
2	JEFTORBZ4014-10	1.0mm Tip M8	
2	JEFTORBZ4014-12	1.2mm Tip M8	
3	JEFTORBZ3605W	White Diffuser	
4	JEFTORBZ3616	Gas Nozzle 16mm bore	
	JEFTORBZ2524-50	Steel Liner 1.0mm-1.2mm x 5m	
	JEFTORBZ2513-50	Teflon Liner 1.0mm-1.2mm x 5m	

# **TWECO TYPE 400AMP MIG TORCH CONSUMABLES**



# BERNARD TYPE 400AMP MIG TORCH CONSUMABLES




PRODUCT	DESCRIPTION	PRICE EX. VAT
1 JEFTORBND4435	Tip Holder	
2 JEFTORBND7496	1.0mm Short Tip	
2 JEFTORBND7490	1.2mm Short Tip	
3 JEFTORBND1596	1.0mm Long Tip	
3 JEFTORBND1590	1.2mm Long Tip	
JEFTORBND4491	Brass Nozzle 19mm Bore	
JEFTORBND44115	Steel Liner 0.8mm-1.2mm x 4.5m	

# WARRIOR LIGHTNING TYPE 450AMP 4.5 METRE MIG TORCH



# WARRIOR LIGHTNING TYPE 450AMP 4.5 METRE MIG TORCH CONSUMABLES



	PRODUCT	DESCRIPTION	PRICE EX. VAT
1	JEFTORLGN633103	Torch Gas Diffuser	
	JEFTORLGN631240	1.0mm Contact Tip	
2	JEFTORLGN631245	1.2mm Contact Tip	
3	JEFTORLGN632162	Torch Shroud	
	JEFTORLGN644515	Torch Conduit Liner	

# BINZEL TYPE 500AMP WATERCOOLED MIG TORCH CONSUMABLES



	PRODUCT	DESCRIPTION	PRICE EX. VAT
1	JEFTORWAT5001	Tip Adaptor 25mm	
2	JEFTORWAT5005C	Ceramic Diffuser	
2	JEFTORWAT5005W	White Diffuser	
3	JEFTORBZ4014-10	1.0mm Tip M8	
3	JEFTORBZ4014-12	1.2mm Tip M8	
4	JEFTORWAT5028	Conical Nozzle 16mm bore	
	JEFTORBZ2513-50	Teflon Liner 1.0mm-1.2mm x 5m	

# WARRIOR TREGASKISS TYPE 500AMP MIG TORCH CONSUMABLES




	PRODUCT	DESCRIPTION	PRICE EX. VAT
1	JEFTORTR404-3	Heavy Duty Tip Holder	
2	JEFTORTR4031-10	Heavy Duty 1.0mm Tip Zirconium	
2	JEFTORTR4031-45	Heavy Duty 1.2mm Tip Zirconium	
3	JEFTORTR4016-62	Heavy Duty Nozzle 16mm bore	
	JEFTORTR4153515	Steel Liner 0.9mm-1.2mm x 4.8m	

# WELDING ACCESSORIES

#### · Designed to reduce overheating and ensure maximum comfort for the user **ELECTRODE HOLDERS** · Brass conductor body with DMC handle. Spiral spring type 400 AMP 600 AMP 600 AMP PRODUCT DESCRIPTION RATING 400Amp Electrode Holder 400Amp @ 35% Duty Cycle, 300Amp @ 60% Duty Cycle 50mm<sup>2</sup> JEFEHT400 JEFEHT600 600Amp Electrode Holder 600Amp @ 35% Duty Cycle, 500Amp @ 60% Duty Cycle 70mm<sup>2</sup> 400Amp @ 35% Duty Cycle, 300Amp @ 60% Duty Cycle 95mm<sup>2</sup> JEFEHT600MY 600Amp Myking Electrode Holder





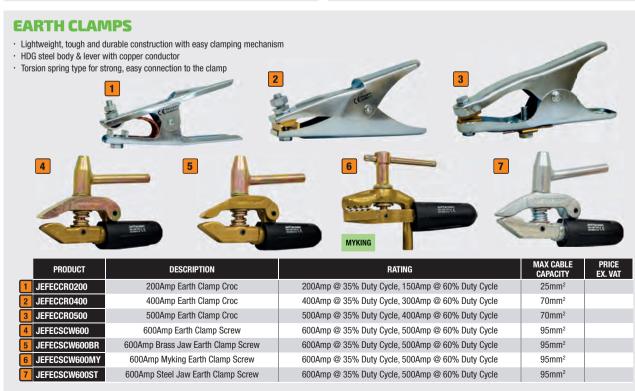





# SPARE TRIPLE FLINTS JEFSPKLGT-T-REF PRICE EX. VAT

# **DINZE & PANEL SOCKETS**







6

- · Rating: 400Amp @ 35% Duty Cycle 300Amp @ 60% Duty Cycle
- · Maximum cable capacity: 50mm²



- · Rating: 600Amp @ 35% Duty Cycle 500Amp @ 60% Duty Cycle
- Maximum cable capacity: 95mm²

	PRODUCT	DESCRIPTION	PRICE Ex. Vat
1	JEFDP35-50F	Dinze Socket 35/50 Female	
2	JEFDP35-50M	Dinze Socket 35/50 Male	
3	JEFDP70-95F	Dinze Socket 70/95 Female	

PRODUCT	DESCRIPTION	PRICE Ex. Vat
JEFDP70-95M	Dinze Socket 70/95 Male	
JEFPS35-50F	Panel Socket M-10 Female 35/50mm <sup>2</sup>	
JEFPS70-95F	Panel Socket M-12 Female 70/95mm <sup>2</sup>	
	JEFDP70-95M JEFPS35-50F	JEFDP70-95M         Dinze Socket 70/95 Male           JEFPS35-50F         Panel Socket M-10 Female 35/50mm²

# HAND HELD WELDING MASK

#### JEFHNDMSK

- · Fixed window: 3-1/4" x 4-1/4"
- · Fibreglass structure

## EN 175:1997-08

#### COMPATIBLE LENSES

COMPATIBLE CENSES		
PRODUCT	DESCRIPTION	PRICE EX. VAT
WEG11	Glass Shade 11 Lens for JEFHNDMSK 103 x 83mm	
WEASL	Anti Spatter Lens for JEFHNDMSK	



PRICE EX. VAT

# **ADDITIONAL WELDING HELMET LENSES**



PRODUCT	DESCRIPTION	PRICE Ex. Vat
JEFWELHT1-IN	Inner Lens for JEFWELHT1 106 x 46mm	
JEFWELHT1-OUT	Outer Lens for JEFWELHT1 110 x 90mm	
JEFWELHT4G-1230UT	Outer Lens for JEFWELHT4G-01-3 JEFWELHT6G-01-3	

CARBON FIBRE DESIGN

**4X ARC** 

SENSORS

OPTICAL CLASS 1/1/1/2

VAT

4X ARC SENSORS

## TREAD PLATE STYLE AUTOMATIC WELDING HELMET

## JEFWELHT5TP

Advanced Jefferson Clearweld: Automatic darkening filter (ADF) significantly reduces ARC glare during welding processes. External 9-13 DIN shade, delay & sensitivity controls. Powered by solar cells, with built-in Lithium battery.

- · Viewing area: 98mm x 55mm
- · Switching time: light to dark: 1/20000s (0.00005s)
- · Dark to light: 0.3s 0.9s
- · Light state: DIN shade 4
- · Impact resistant shell with tread · Net Weight: 470g plate wrap finish
- · Operating temperature:
- -5°C to + 55°C (23°F to 131°F)
- · Cartridge size: 110 x 90 x 9mm
- · Function modes: welding & grinding · Impact resistant polymide nylon



# **COMPATIBLE LENSES**

PRODUCT	DESCRIPTION	PRICE EX. VAT
JEFWELHT3C-IN	Inner Lens for JEFWELHT3C & JEFWELHT5TP 108 x 59mm	
JEFWELHT3C-OUT	Outer Lens for JEFWELHT3C & JEFWELHT5TP 123 x 99mm	

**CARBON FIBRE STYLE AUTOMATIC WELDING HELMET** 

#### JEFWELHT3C

- · Slim & lightweight
- · Welding mode & grinding mode
- · Carbon fibre wrap finish
- · Automatic light adjustment from light to dark in 1/20,000th of a second
- · Shade control from DIN 9 13
- · Adjustable sensitivity
- · Viewing Area: 98 x 55mm
- · Light State: DIN Shade 4
- · UV/IR Protection: DIN 16
- · Power On/Off: Fully automatic





SETTINGS WELD MODE TOGGLE

#### **COMPATIBLE LENSES**

PRODUCT	DESCRIPTION	PRICE Ex. Vat	PRICE EX.
JEFWELHT3C-IN	Inner Lens for JEFWELHT3C & JEFWELHT5TP 108 x 59mm		FRICE EX.
JEFWELHT3C-OUT	Outer Lens for JEFWELHT3C & JEFWELHT5TP 123 x 99mm		

TUNDRA PM1 AUTO DARKENING WELDING & GRINDING HELMET

# TUNWELHTPM1

- · Large viewing area
- · Fully adjustable shade control suitable for all high and low current welding requirements
- · Lightweight construction to reduce neck strain and enhance comfort
- · Tilt adjustment and pivot style headgear for even weight distribution
- · Robust and impact resistant polyamide nvlon
- · Replaceable solar cell / lithium battery pack
- · Battery life expectancy up to 5 years
- · Welding mode & grinding mode

**COMPATIBLE LENSES** 

- · Viewing area: 100 x 73mm (3.94" x 2.87")
- · Cartridge size: 133 x 114mm
- · UV / IR protection:
- Permanent Shade DIN 16 · Light state: DIN shade 4
- · Dark state: From DIN4 DIN13 (Variable)
- · Power supply: Solar cells + 1 x CR2450 lithium battery
- Power On/Off: Fully automatic
- · Switching time: Light to dark 1/30,000s
- · Switching time: Dark to light 0.25
- ~ 0.8s

- · Operating temperature:
- 5°C to + 55°C (23°F to 131°F)
- · Storing temperature:
  - 20°C ~ + 70°C (-4 ° F to 158° F)
- · Function Modes: Grinding / Welding · Helmet material: Impact resistant polyamide nylon
- · Impact rating: B
- · Dimensions: 194 x 245 x 334mm
- · Weight: 0.5kg
- · Minimum amperage required: ≥3 Amp

**HI-DEFINITION** OPTICAL CLASS 1/1/1/1

> MANUFACTURED & TESTED TO EN175B & EN379 STANDARDS

PRICE EX. VAT

# INDUSTRIAL

PRODUCT	DESCRIPTION	PRICE EX. VAT
TUNWELHTPM1-IN	Inner Lens for TUNWELHTPM1108 x 78	
TUNWELHTPM1-OUT	Outer Lens for TUNWELHTPM1132 x 114	

# **AUTOMATIC WELDING & GRINDING HELMET**

#### JEFWELHT4G

- · Welding mode & grinding mode
- · Includes replaceable cover lenses
- · Variable shades 9 -13
- · Lens darkening reaction: 1/25,000th
- · Long-lasting, environmentally friendly power supply
- · External and internal shade, sensitivity, delay time and grinding mode controls
- · Photoelectric sensor technology with high-quality dual LCD and filter
- · Reliable and safe arc protection
- · Operating temperatures ranging from -5°C and 55°C
- · Portable and balanced design
- · Fully compliant with current safety and technical standards

# MATTE BLACK FINISH OPTICAL CLASS 1/2/1/2 PRICE EX. VAT

#### **COMPATIBLE LENSES**

PRODUCT	DESCRIPTION	PRICE EX. VAT
JEFWELHT4G-IN	Inner Lens for JEFWELHT4G 96 x 51mm	
JEFWELHT4G-OUT	Outer Lens for JEFWELHT4G 106 x 88mm	



- · Slim, lightweight & well-balanced auto-darkening welding helmet
- · Fully adjustable headgear for comfort and fatigue reduction
- · Powered by 1x CR2045 lithium battery & solar cells
- · Features auto-off circuitry at 15-20 minutes and low-battery indicator
- · Two independent ARC Sensors for increased safety and protection
- · Variable shade 9-13 with sensitivity and delay controls
- · Suitable for MMA, MIG, TIG, PAC, PAW, CAC-A processes
- · Optical Class: 1/2/1/2 (DIN EN 379:2009-07)
- · Impact Rating: B (120m/s) (DIN EN 175:1997) Protection Against High Speed Particles
- · Viewing Area: 92×42mm
- · Cartridge Size: 110×90×9mm
- · Light State: DIN 4
- · Power On/Off: Fully automatic
- · Sensitivity Control: Low / Medium / High
- · UV/IR Protection: DIN 16
- · Switching Time Light to Dark: 1/25000s
- · Dark to Light:
  - 0.25~0.30s (High Sensitivity)
- 0.35~0.6s (Medium Sensitivity) 0.65~0.85s (Slow Sensitivity)
- · Low Amperage TIG: 20A (DC,AC)
- · Operating Temperature: 5°C to + 55°C
- · Weight: 490g





#### **COMPATIBLE LENSES**

· Compatible with JEFWELHT6G-01, JEFWELHT6G-02 & JEFWELHT6G-03

PRODUCT	DESCRIPTION	PRICE EX. VAT
JEFWELHT6G-IN	Inner Lens JEFWELHT6G 103.7 x 53.2 x 0.8mm	
JEFWELHT4G-1230UT	Outer Lens JEFWELHT4G-01-3 & JEFWELHT6G01-3 116mm x 89mm	

DESCRIPTION

Automatic Welding & Grinding Helmet - Type 1

Automatic Welding & Grinding Helmet - Type 2

Automatic Welding & Grinding Helmet - Type 3



PRODUCT

JEFWELHT6G-01

JEFWELHT6G-02

JEFWELHT6G-03

# **TUNDRA AIR FED WELDING HELMET KIT**

## TUNAWH01

- · Heavy duty protection whilst welding, gouging & grinding
- · Offering heavy duty protection from welding fumes and dust when welding, gouging & grinding
- · ADF technology offers true colour vision
- · Lightweight helmet design manufactured from impact resistance Nylon
- · Adjustable air flow settings to suit different environments and tasks
- · Operating Temperatures: 0-40°
- · Operating Duration: 6-8 hours (L/H setting) with new filter
- · Charging Time: 6 hours
- · Viewing Area: 100mm x 50mm
- · Shade State: DIN 4 13.5
- · Shade Control: Internal Adjust
- · Switching Time: 0.08 ms
- · Delay Time: 0.1 1.9s (Internal Variable)
- · Arc Sensors: 4
- · Dimensions (HxWxD): 210 x 230 x 480mm
- · Helmet Weight: 1.03kg
- · Respirator Weight: 1.02kg











PROTECTED AIR HOSE



POWERED AIR RESPIRATOR

Li-ion 7.4V 7800mAh battery with charger Nylon carrying bag Air flow checker

**FULL RANGE OF CONSUMABLES** AVAILABLE

TUNAWH01

PRICE EX. VAT

OPTICAL CLASS 1/1/1/2





**SAFETY FEATURE: VIBRATION ALERT & SOUND** TO INDICATE CLOGGED FILTER

# **TUNDRA AIR FED WELDING HELMET CONSUMABLES**

#### **MAIN FILTER**

TUNAWH-S01



PRICE Ex. Vat

# PRE-FILTER (PACK OF 10)

TUNAWH-S02



PRICE Ex. Vat

# MAIN SHELL CLEAR LENS (PACK OF 5)

TUNAWH-S03



PRICE Ex. Vat

# ADF OUTER CLEAR LENS (PACK OF 10)

TUNAWH-S04



PRICE Ex. Vat

# ADF INSIDE COVER LENS (PACK OF 10)

TUNAWH-S05



PRICE Ex. Vat

# **FACE SEAL**

TUNAWH-S06



PRICE Ex. Vat

#### 7.4V HEAVY DUTY BATTERY

TUNAWH-S07



PRICE EX. VAT

# **BATTERY CHARGER**

TUNAWH-S08



PRICE Ex. Vat

# HEAD SWEATBAND (PACK OF 2)

TUNAWH-S10



PRICE EX. VAT

#### HEADGEAR WITH AIRDUCT

TUNAWH-S11



PRICE Ex. Vat

# **AIR HOSE & COVER**

TUNAWH-S12



PRICE EX. VAT

#### BLOWER UNIT WITH FILTER COVER

TUNAWH-S13



EX. VAT

# FILTER COVER FOR BLOWER UNIT

TUNAWH-S14



EX. VAT

# **AUTO DARKENING FILTER**

TUNAWH-S15



EX. VAT

# HARNESS FOR WAIST BELT

TUNAWH-S16



**WAIST BELT** 

TUNAWH-S17



# 14" WELDING **GAUNTLETS**

#### JEFGLWG-14RS

- · Red leather welding glove with double reinforced palm
- · Cotton & foam lining
- · Protective gauntlet cuff, wing thumb design









- · Yellow leather welding glove with double reinforced palm
- Cotton & foam linina
- Protective gauntlet cuff, wing thumb design





PRICE EX. VAT

# **16" PREMIUM WELDING GAUNTLETS**

## JEFGLWG-16BP

- · Blue cow split leather welding glove with blue double reinforced
- · Cotton & foam lining. Protective gauntlet
- cuff, wing thumb design









## 21" WELDING SLEEVES

#### **JEFGLWLSLV**

- · Yellow leather welding sleeve
- · Elasticated wrists for easy and comfortable wear
- · Hook & loop adjustable design · Manufactured & Tested
- ISO 13688:2013 &

EN ISO 11611:2015





## 14" PREMIUM TIG WELDING GAUNTLETS

## JEFGLWG-TIGP

- · Soft, comfortable, goat skin leather glove designed to offer the required dexterity & protection for TIG welding processes
- Heavy duty leather cuffs providing extra protection to the forearm
- · Kevlar stitched lining
- · Manufactured & Tested to: EN 420: 2003+A1: 2009, EN 407:2004 EN 12477:2001+A1:2005, BS EN 388:2016+A1:2018, according to regulation (EU) 2016/425
- · These gloves are classed as CAT.II Personal Protective Equipment by the PPE Regulation (EU) 2016/425













# **MAGNETIC WELDING CLAMPS**

- · Magnetic position holders can hold welding jobs at angles of 45°, 90° or 135° as needed
- · Suitable for use on square or round materials



PRODUCT	SIZE	HOLDING Capacity	PRICE Ex. Vat
JEFMAGHOL075	75mm	4.1kg	
JEFMAGHOL092	92mm	9.2kg	
JEFMAGHOL116	116mm	15kg	

# **WELDING MAGNETS** WITH ON/OFF SWITCH

- · Holds metal securely 45° & 90°
- · Operated with on/off switch
- · Easily cleaned
- · Designed for brazing, soldering and tacking: flat, round, angular and square stock



	PRODUCT	SIZE	PULLING FORCE	PRICE Ex. Vat
1	JEFWELMAG01	110 x 95 x 25mm	30lbs / 13kgf	
2	JEFWELMAG02	150 x 130 x 32mm	100lbs / 45kgf	

## **MIG WELDING PLIERS**

# JEFMIGPLI

- · Manufactured from high quality carbon steel
- · Spring loaded
- · Can be used for hammering, wire cutting, spatter removal and insulation bushing removal and installation





# 6X6FT WELDING CURTAIN WITH FRAME

#### JEFCURTOR6X6FR

- · Easy to assemble, lightweight and portable
- · 24 eyelets for securely fixing all four sides of the curtain
- · Nylon ties provide strong fastening to the frame
- · Colour: Orange



6X6FT WELDING CURTAIN

#### JEFCURTOR6X6

 Attaches to the Jefferson JEFCURTOR6X6FR welding curtain frame and other standard welding curtain frames



EN 25980:2014

# 8X6FT WELDING CURTAIN WITH FRAME

#### JEFCURTOR8X6FR

- · Easy to assemble, lightweight and portable
- 28 eyelets for securely fixing all four sides of the curtain
- · Nylon ties provide strong fastening to the frame
- · Colour: Orange





# 8X6FT WELDING CURTAIN

#### JEFCURTOR8X6

 Attaches to the Jefferson JEFCURTOR8X6FR welding curtain frame and other standard welding curtain frames



EN 25980:2014

# COMBINATION BOTTLE SPANNER . A

# JEFCOMBTLS

- · 21 & 28mm
- · Drop-forged



PRICE EX. VAT

# **7MM SPINDLE KEY**



PRICE EX. VAT

# **12CM NOZZLE CLEANERS**



# SPRING HANDLED CHIPPING HAMMER

# JEFCHIHAM

- · Alloy carbon steel head 40HRC
- · Spring steel handle
- · Weight: 0.61lb



# FRENCH CHALK HOLDER

#### **JEFFCHOLD**

· Includes chalk



PRICE EX. VAT

#### **WELDING GAUGE CAM TYPE**

# JEFWELGAU-CAM

- High quality stainless steel blades
- Accurate measuring of fillet leg length and weld throat size
- · Undercut and pitting depth
- · Excess weld metal
- · Root and face gap



#### **WELDING GAUGE FILLET TYPE**

# JEFWELGAU-FIL

- · High quality stainless steel blades
- · Metric & Imperial
- · Sizes:
  - 1/8" 1"
  - 3.2-25.4mm
- Set of 7 blades
- · Vinyl pocket case with snap lock



# BENCH DRILLS

Fitted with heavy duty motors, capable of accurate drilling into wood, plastics, ceramics and many metals. Small footprint area for workshop or portable enough to take to the job.

# **350W BENCH** DRILL

## JEFPDB0350

- · Type: Bench
- · Height: 580mm
- · Chuck capacity: 1.5-13mm
- · Spindle Taper: B16
- · Spindle Travel: 50mm
- · Speed: 620 2620rpm
- · Motor Power: 350W
- · 5 Speeds: Range (20 2620rpm)
- · Drilling capacity: Ø13mm
- · Swing: 210mm
- · Column diameter: Ø46mm
- · Table size: 160 x 160mm
- · Throat depth: 105mm
- · Weight: 17kg





# **550W BENCH DRILL**

## JEFPDB0550

- · Type: Bench
- · Height: 980mm
- · Chuck Size: 16mm
- · Spindle Taper: MT2
- · Spindle Travel: 80mm
- · Max. Drilling Diameter: 16mm (5/8")
- · Speed: 180 2770rpm
- · Motor Power: 550W
- · 16 Speeds: (Range: 180-2770rpm)
- · Cast iron working table and cast iron base
- · Micro-switch inside pulley cover box
- · Front emergency switch
- · Cast iron feeding handle
- · Chuck guard
- · Cast iron belt pulley
- · Rack lifting system · Flexible LED working light
- · Cross laser light
- · Weight: 45kg





# EMERGENCY POWER OFF SWITCH



# **750W BENCH** DRILL

## JEFPDB0750-16S

- · Type: Bench
- · Height: 1000mm
- · Chuck Size: 16mm
- · Spindle Taper: MT2
- · Spindle Travel: 85mm
- · Max. Drilling Diameter: 16mm (5/8")
- · Speed: 180 2770rpm
- · Motor Power: 750W
- · 16 Speeds: (Range: 180-2770rpm)
- · Cast iron working table and cast iron base
- · Micro-switch inside pulley cover box
- · Front emergency switch
- · Cast iron feeding handle
- · Chuck guard
- · Cast iron belt pulley
- · Rack lifting system
- · Flexible LED working light
- · Cross laser light
- · Weight: 55kg



EMERGENCY POWER OFF SWITCH



# **MORSE TAPERS**

PRODUCT	DESCRIPTION	PRICE EX. VAT
1 JEFMT3-JT3	Morse Taper Arbor MT3	
2 JEFMT3-MT2	Morse Taper Sleeve MT3-MT2	
3 JEFMT4-MT3	Morse Taper Sleeve MT4-MT3	
JEFMAGDBH01	Weldon Magnetic Drill Bit Holder with Morse 3 Taper MT3	
JEFMAGDBH02	Weldon Magnetic Drill Bit Holder with Morse 4 Taper MT4	

# PILLAR DRILLS

Fitted with heavy duty motors, capable of accurate drilling into wood, plastics, ceramics and many metals. These quality pillar drills are the ideal choice for a busy workshop.

# **750W PILLAR DRILL**

#### JEFPDB0750-12S

- · Type: Pillar
- · Height: 1600mm
- · Chuck Size: 20mm
- · Spindle Taper: MT3
- · Spindle Travel: 85mm
- · Max. Drilling Diameter: 25mm (1")
- · Speed: 280 2830rpm
- · Motor Power: 750W
- · 12 Speeds: (Range: 280-2830rpm)
- · Cast iron working table and cast iron base
- · Micro-switch inside pulley cover box
- · Front emergency switch
- · Cast iron feeding handle
- · Chuck guard
- · Cast iron belt pulley
- · Rack lifting system
- · Flexible LED working light
- · Cross laser light
- · Weight: 71kg



**EMERGENCY POWER** OFF SWITCH



# 1100W PILLAR DRILL

#### JEFPDB1100

- · Type: Pillar
- · Height: 1710mm
- · Chuck Size: 20mm
- · Spindle Taper: MT3
- · Spindle Travel: 120mm
- · Max. Drilling Diameter: 25mm (1")
- · Speed: 150 2450rpm
- · Motor Power: 1100W
- · 12 Speeds: (Range: 150-2450rpm)
- · Cast iron working table and cast iron base
- · Micro-switch inside pulley cover box
- · Front emergency switch
- · Cast iron feeding handle
- · Chuck guard
- · Cast iron belt pulley
- · Rack lifting system
- Flexible LED working light
- · Cross laser light
- · Weight: 110kg



**EMERGENCY POWER OFF SWITCH** 



# **1500W PILLAR** DRILL

#### JEFPDB1500

- · Type: Pillar
- · Height: 1710mm
- · Chuck Capacity: 5-20mm
- · Spindle Taper: MT4
- · Spindle Travel: 120mm
- · Speed: 150-2450rpm
- · Motor Power: 1500W
- · 12 Speeds: (Range: 150-2450rpm)
- · Max Drilling Diameter: 32mm (11/4")
- · Input Voltage Frequency: 230V 50Hz
- · Spindle Taper: MT4
- · Max. distance from spindle axis to surface of column: 255mm
- · Max. distance from spindle end to surface of table: 745mm
- · Max. distance from spindle end to surface of base: 1205mm
- · Swing: 510mm
- · Table Size: 420 x 480mm
- · Base Size: 575 x 425mm
- · Column Diameter: 92mm
- · Weight: 125kg



**EMERGENCY POWER OFF SWITCH** 



DRILL CHUCKS, KEYS & ADAPTORS

Heavy duty to ensure accuracy and extended work life, the Jefferson range of drill chucks, keys & adaptors encompass a variety of convenient options, including self tightening and keyless, to allow for effortless drilling.







	PRODUCT
1	JEFCS1
2	JEFCS2
3	JEFCS6
4	JEFCS12
5	JEFCS14
6	JEFMAGDSP30

PRODUCT	DESCRIPTION	PRICE Ex. Vat
FCS1	Drill Chuck 1/2" 20UNF & Key	
FCS2	Drill Chuck 1/2" 20UNF & SDS & Key	
FCS6	Drill Chuck 1/2" 20UNF Part Metal Keyless	
FCS12	Drill Chuck 1/2" -20UNF Keyless	
FCS14	Drill Chuck 1/2" -20UNF Keyless & SDS	
FMAGDSP30	Chuck & Adaptor for Magnetic Drill	











PRODUCT	DESCRIPTION	PRICE EX. VAT
1 JEFCS4	Drill Chucks 5/8" Key	
2 JEFCS8	Drill Chuck 1/2" SDS Adaptor	
3 JEFCS11	Drill Chuck 1/2" Chuck Key	
4 JEFCS17	20mm Chuck Key	
5 JEFMAGDSP29	Magnetic Drill Adaptor 1/2" 20UNF Weldon	

# **60MM MAGNETIC BIT HOLDER**





# **3 PIECE SOCKET ADAPTOR SET**

## JEFDBSAS03

- · Cr-V Steel with sandblasted finish
- · Includes:
- · 1/4" Sq. x 65mm
- · 3/8" Sq. x 65mm · 1/2" Sq. x 72mm
- CR-V









# **POWER TOOL ACCESSORIES**

# **6 PIECE HSS COUNTER SINK SET**

# JEFCSBS06

- · 90° Drill Bits
- · Includes: · For Carbon Steel, Sheet Iron, PVC,
  - Wood
- · 6.3mm
- · 8.3mm
- · 10.4mm
- · 12.4mm
- · 16.5mm
- · 20.5mm







High speed steel drill bits that are extremely hard wearing and more resistant to heat while drilling into metal surfaces.



PRODUCT	DESCRIPTION	PRICE EX. VAT
1 JEFSTPHSS4-12	HSS Step Drill 4-12mm	
2 JEFSTPHSS4-20	HSS Step Drill 4-20mm	
3 JEFSTPHSS4-32	HSS Step Drill 4-32mm	

# **3 PIECE HSS STEP DRILL SET**




## JEFSTPSHSS03

- · 4-12mm: JEFSTPHSS4-12
- · 4-20mm: JEFSTPHSS4-20
- · 4-32mm: JEFSTPHSS4-32

PRICE EX. VAT

#### **M2 STEP DRILLS**

Suitable for thin materials, e.g. non-ferous metals, sheet steel, plastic or stainless



PRODUCT	DESCRIPTION	PRICE EX. VAT
1 JEFSTPM2-4-12	M2 Step Drill 4-12mm	
2 JEFSTPM2-4-20	M2 Step Drill 4-20mm	
JEFSTPM2-4-32	M2 Step Drill 4-32mm	

## **3 PIECE M2 STEP DRILL SET**



HSS

· Includes: 4-12mm: JEFSTPM2-4-12

4-20mm: JEFSTPM2-4-20

4-32mm: JEFSTPM2-4-32

PRICE EX. VAT

# **8 PIECE TCT ROTARY BURRS**

M2

# **3 PIECE TCT ROTARY BURRS**

JEFBURTCTR03 **HSS Diamond Tooth Cut** 

- · Includes:
- · B1020 10x6mm
- · F1020 10x6mm
- · D1009 10x6mm





PRICE EX. VAT

## JEFBURTCTR08

HSS Diamond Tooth Cut, For Steel, Aluminium, Cast Iron, Wood, Acrylics, Fibreglass & Plastics

- · Includes:
- · A1225 12x6mm
- · C1020 10x6mm
- · F1225 12x6mm
- · D1009 10x6mm · A1020 10x6mm
- · C0616 6x6mm
- · F1020 10x6mm
- · D0605 6x6mm

HSS



# 13MM ANGLE GRINDER QUICK NUT

#### JEFCS15

- · Suitable for use with all angle grinders with an M14 thread
- · Allows for quick disc changing without requiring additional tools
- · Thickness: 13mm





# **PLANER BLADES (PAIR)**

## JEFPLAB01

- Universal / reversible fit, compatible with most table-top and hand held electric planers
- · High-quality HSS blade
- · Dimensions: 82mm x 5.5mm



# **HOLESAW ARBOR & PILOT DRILL**



PRODUCT	DESCRIPTION	SIZE	PRICE EX. VAT
JEFHSA14-30	Holesaw Arbor & Pilot Drill	Ø 14 - 30mm 7/16" Hex Shank	
JEFHSA32-152	Holesaw Arbor & Pilot Drill	Ø 32 - 152mm 7/16" Hex Shank	

# **9 PIECE PLUMBERS HOLESAW SET**

## JEFHSK09P

- HSS-M3 High performance steel cutting edge suitable for cutting a wide range of metals, alloys & plastics with ideal sizes for plumbers.
- · Bi-Metal
- · Variable pitch tooth profile

#### INCLUDES:

19mm
 38mm
 Pilot Drill Bit
 22mm
 44mm
 Ø 14-30mm Arbor

· 29mm · 57mm · Ø 32-152mm Quick Release Arbor



PRICE EX. VAT

## **9 PIECE ELECTRICIANS HOLESAW SET**

#### JEFHSK09E

- HSS-M3 High performance steel cutting edge suitable for cutting a wide range of metals, alloys & plastics with ideal sizes for electricians.
- · Bi-Metal
- · Variable pitch tooth profile

#### INCLUDES:

· 16mm · 32mm · Pilot Drill Bit · 20mm · 40mm · Ø 14-30mm Arbor

· 25mm · 51mm · Ø 32-152mm Quick Release Arbor



# **15 PIECE POWER BIT SET**

#### JEFDBS015

· Shock-resistant S2 Steel · Includes:

Hex shankColour rings2 x Slotted: 4, 6mm3 x Hex: 3, 4, 5mm

s · 3 x Hex: 3, 4, 5mm · 2 x Phillips: #1, #2 · 2 x Pozi: #1, #2

• 5 x TRX-Star: T10, T15, T20, T25, T30

· 1 x 65mm quick release bit holder







# **32 PIECE IMPACT TORSION BIT SET**

#### JEFDBITS32

- · Shock-resistant S2 Steel
- · Hex shank
- · Colour rings
- · Includes:
- · 4 x Slotted: 3, 4, 5, 6mm
- · 4 x Hex: 3, 4, 5, 6mm
- · 4 x Phillips: #1, 2 x #2, #3
- · 4 x Pozi: #1, 2 x #2, #3
- · 7 x TRX-Star: T10, T15, T20, T25, T27, T30, T40
- · 7 x Torx Security: 10H. T15H. T20H. T25H. T27H. T30H. T40H
- · 1 x 65mm quick release bit holder
- · 1 x 1/4" drive adaptor





# **40 PIECE POWER BIT SET**

#### JEFDBS040

- · 3/8" & 1/2" Sq Drive
- · Includes:
- · 2 x Bit Adaptor: 3/8" & 1/2" drive
- · 7 x 30mm: 4, 5, 6, 7, 8, 10, 12mm
- · 7 x 30mm TRX-Star: T20, 25, 30, 40, 45, 50, 55
- · 5 x 30mm Spline Bits: 5, 6, 8, 10,12mm
- · 7 x 75mm Hex: 4, 5, 6, 7, 8, 10, 12mm
- · 7 x 75mm TRX-Star: T20, 25, 30, 40, 45, 50, 55
- · 5 x 75mm Spline Bits: 5, 6, 8, 10, 12mm







SUPPLIED IN A DURABLE AND PORTABLE CARRY-CASE

# **43 PIECE IMPACT SCREWDRIVER BIT SET**

#### JEFDBITSN43

- · High imapct resistance
- · Extended tool life
- · S2 alloy steel
- · Includes:
- · 3 x Hex (25mm): H4.0, H5.0, H6.0
- · 3 x Square (25mm): SQ1, SQ2, SQ3
- · 6 x Phillips (25mm): 2x PH1, 2x PH2, 2x PH3
- · 6 x Pozi (25mm): 2x PZ, 2x PZ2, 2x PZ3,
- · 3 x Pozi (50mm):PZ1, PZ2, PZ3
- · 12x TRX-Star (25mm): 2x TX10, 2x TX15. 2x TX20, 2x TX25, 2x TX30, 2x TX40
- · 3x TRX-Star (50mm): TX15, TX20, TX30
- · 1 x 60mm quick release bit holder
- · 6 x drive adaptor:
  - (3x Metric) 8mm, 10mm, 13mm (3x Imperial) 1/4", 3/8", 1/2"



















# **MULTI-TOOL BLADES**

COMPATIBLE **P** AEG ☑ BLACK & DECKER ✓ CRAFTSMAN FEIN" MULTI-TOOLS WITH STARLOCK FITTINGS MILWAUKEE MULTI-TOOL ☑ JCB ✓ METABO ✓ MAKITA ✓ HIKOKI ▼ RIDGID ✓ ROCKWELL BRANDS **RYOBI** SKIL ✓ STANLEY **₩** WORX **✓** SMART

# **BI-METAL MULTI-TOOL BLADES (5 PACKS)**

- · Designed for general purpose cutting in a range of materials including: wood, nails, screws, plastic, copper pipe, plasterboard, non-ferrous metals, fibreglass etc.
- 1.4tpi
- · 51mm cutting depth
- · Quick-release shank
- · Durable & reliable cutting
- · Universal fit & compatibility



	PRODUCT	DESCRIPTION	SIZE	PRICE Ex. Vat
1	JEFMTB032-05	32mm Bi-Metal Multi Tool Blade (5 Pack)	32 x 0.8mm	
2	JEFMTB044-05	44mm Bi-Metal Multi Tool Blade (5 Pack)	44 x 0.8mm	

# **4 PIECE BI-METAL MULTI-TOOL BLADE SET**

#### JEFMTBS-04

- · Designed for general purpose cutting in a range of materials including: wood, nails, screws, plastic, copper pipe, plasterboard, non-ferrous metals, fibreglass, etc.
- · Tough titanium-coated teeth for fast, accurate cutting
- · Quick-release universal shank
- · Long-lasting performance
- · Includes:
- · 53 x 32mm / 1.4tpi
- · 53 x 44mm / 1.4tpi
- · 40 x 65mm / 1.4tpi
- · 67 x 32mm / 1.4tpi







# 75MM MULTI-TOOL **DRYWALL BOX CUTTER**

#### JEFMTBC075

- · 75mm x 75mm x 35mm single box / socket cutter
- Universal fit
- · Quick-release shank
- Provides a very clean and precise cut



PACK OF 5



## **8 PIECE BI-METAL MULTI-TOOL BLADE SET**

# JEFMTBS-08

- · Designed for general purpose cutting in a range of materials including: wood, nails, screws, plastic, copper pipe, plasterboard, non-ferrous metals, fibreglass, etc.
- · Tough titanium-coated teeth for fast, accurate cutting & long-lasting performance
- · Quick-release universal shank
- · Tough titanium-coated teeth
- · Long-lasting performance
- · Includes:
- · 2 x 40 x 34mm Course Timber Blade / 3.8tpi
- · 2 x 40 x 68mm Course Timber Blade / 3.9tpi
- · 1 x 51 x 32mm / 1.4tpi
- · 1 x 34 x 40mm / 1.4tpi
- · 1 x 40 x 68mm / 1.4tpi · 1 x 51 x 44mm / 1.4tpi















# SDS DRILLING



PRODUCT	DESCRIPTION	PRICE Ex. Vat
JEFDBSDSP05.0-160	5.0mm SDS Plus Bit 160-100mm	
JEFDBSDSP05.5-160	5.5mm SDS Plus Bit 160-100mm	
JEFDBSDSP05.5-210	5.5mm SDS Plus Bit 210-150mm	
JEFDBSDSP06.0-160	6.0mm SDS Plus Bit 160-100mm	
JEFDBSDSP06.0-210	6.0mm SDS Plus Bit 210-150mm	
JEFDBSDSP06.5-160	6.5mm SDS Plus Bit 160-100mm	
JEFDBSDSP06.5-210	6.5mm SDS Plus Bit 210-150mm	
JEFDBSDSP07.0-160	7.0mm SDS Plus Bit 160-100mm	
JEFDBSDSP07.0-210	7.0mm SDS Plus Bit 210-150mm	
JEFDBSDSP08.0-210	8.0mm SDS Plus Bit 210-150mm	
JEFDBSDSP08.0-260	8.0mm SDS Plus Bit 260-200mm	
JEFDBSDSP10.0-210	10.0mm SDS Plus Bit 210-150mm	
JEFDBSDSP10.0-350	10.0mm SDS Plus Bit 350-300mm	
JEFDBSDSP12.0-210	12.0mm SDS Plus Bit 210-150mm	
JEFDBSDSP12.0-260	12.0mm SDS Plus Bit 260-200mm	
JEFDBSDSP12.0-360	12.0mm SDS Plus Bit 360-300mm	

PRODUCT	DESCRIPTION	PRICE Ex. Vat
JEFDBSDSP14.0-310	14.0mm SDS Plus Bit 310-250mm	
JEFDBSDSP16.0-210	16.0mm SDS Plus Bit 210-150mm	
JEFDBSDSP16.0-310	16.0mm SDS Plus Bit 310-260mm	
JEFDBSDSP18.0-200	18.0mm SDS Plus Bit 200-150mm	
JEFDBSDSP18.0-300	18.0mm SDS Plus Bit 300-250mm	
JEFDBSDSP20.0-200	20.0mm SDS Plus Bit 200-150mm	
JEFDBSDSP20.0-300	20.0mm SDS Plus Bit 300-250mm	
JEFDBSDSP20.0-450	20.0mm SDS Plus Bit 450-400mm	
JEFDBSDSP22.0-250	22.0mm SDS Plus Bit 250-200mm	
JEFDBSDSP22.0-450	22.0mm SDS Plus Bit 450-400mm	
JEFDBSDSP24.0-250	24.0mm SDS Plus Bit 250-200mm	
JEFDBSDSP24.0-450	24.0mm SDS Plus Bit 450-400mm	
JEFDBSDSP25.0-450	25.0mm SDS Plus Bit 450-400mm	
JEFDBSDSP26.0-450	26.0mm SDS Plus Bit 450-400mm	

# **SDS CHISELS**



# **SDS PLUS CHISELS**

PRODUCT	DESCRIPTION	PRICE Ex. Vat
1 JEFCHSDSP20-250	SDS Plus Cold Chisel 20mm x 250mm	
2 JEFCHSDSP40-250	SDS Plus Cold Chisel 40mm x 250mm	



# **SDS MAX CHISELS**

	PRODUCT	DESCRIPTION	
	JEFCHSDSM25-280	SDS Max Cold Chisel 25mm x 280mm	
	JEFCHSDSM25-400	SDS Max Cold Chisel 25mm x 400mm	
3	JEFCHSDSM25-600	SDS Max Cold Chisel 25mm x 600mm	
	JEFCHSDSM50-300	SDS Max Cold Chisel 50mm x 300mm	
	JEFCHSDSM50-400	SDS Max Cold Chisel 50mm x 400mm	
	JEFCHSDSM80-300	SDS Max Cold Chisel 80mm x 300mm	
	JEFCHSDSM25-400SH SDS Max Cold Chisel 25mm x 400mm Self Sharpening		
4	JEFCHSDSM40-350SH	SDS Max Cold Chisel 40mm x 350mm Self Sharpening	
5	JEFBPSDSM-400 SDS Max Bull Point 400mm		

# HSS FULLY GROUND DRILL BITS

The Jefferson range of drill bits are fully ground, manufactured from high speed steel (HSS) increasing their heat resistance and available from 1mm to 13mm. Manufactured to DIN 338 standard with 135° conical section.

# **HSS FULLY GROUND 19 PIECE DRILL BIT SET**



DIN 338


HSS

- · HSS drill bits are designed to reduce friction and heat
- · Includes: 1, 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, 7.5, 8, 8.5, 9, 9.5, and 10mm
- · 135° Split point tip
- · DIN338

PRICE EX. VAT

# **HSS FULLY GROUND 25 PIECE DRILL BIT SET**





- · Includes:
- 1, 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, 7.5, 8, 8.5, 9, 9.5, 10, 10.5, 11, 11.5, 12, 12.5, and 13mm
- · 135° Split point tip



PRICE EX. VAT

# **INDIVIDUAL HSS FULLY GROUND DRILL BITS**



PRODUCT	DESCRIPTION	PRICE Ex. Vat
JEFDBH02.0	2.0mm DIN338 HSS Fully Ground Drill Bit	
JEFDBH02.5	2.5mm DIN338 HSS Fully Ground Drill Bit	
JEFDBH03.0	3.0mm DIN338 HSS Fully Ground Drill Bit	
JEFDBH03.2	3.2mm DIN338 HSS Fully Ground Drill Bit	
JEFDBH03.5	3.5mm DIN338 HSS Fully Ground Drill Bit	
JEFDBH04.0	4.0mm DIN338 HSS Fully Ground Drill Bit	
JEFDBH04.2	4.2mm DIN338 HSS Fully Ground Drill Bit	
JEFDBH04.5	4.5mm DIN338 HSS Fully Ground Drill Bit	
JEFDBH04.8	4.8mm DIN338 HSS Fully Ground Drill Bit	
JEFDBH05.0	5.0mm DIN338 HSS Fully Ground Drill Bit	
JEFDBH05.2	5.2mm DIN338 HSS Fully Ground Drill Bit	
JEFDBH05.5	5.5mm DIN338 HSS Fully Ground Drill Bit	
JEFDBH05.6	5.6mm DIN338 HSS Fully Ground Drill Bit	
JEFDBH05.8	5.8mm DIN338 HSS Fully Ground Drill Bit	
JEFDBH06.0	6.0mm DIN338 HSS Fully Ground Drill Bit	
JEFDBH06.5	6.5mm DIN338 HSS Fully Ground Drill Bit	
JEFDBH06.6	6.6mm DIN338 HSS Fully Ground Drill Bit	
JEFDBH06.8	6.8mm DIN338 HSS Fully Ground Drill Bit	
JEFDBH07.0	7.0mm DIN338 HSS Fully Ground Drill Bit	
JEFDBH07.2	7.2mm DIN338 HSS Fully Ground Drill Bit	
JEFDBH07.5	7.5mm DIN338 HSS Fully Ground Drill Bit	
JEFDBH08.0	8.0mm DIN338 HSS Fully Ground Drill Bit	
JEFDBH08.5	8.5mm DIN338 HSS Fully Ground Drill Bit	
JEFDBH08.8	8.8mm DIN338 HSS Fully Ground Drill Bit	
JEFDBH09.0	9.0mm DIN338 HSS Fully Ground Drill Bit	
JEFDBH10.0	10.0mm DIN338 HSS Fully Ground Drill Bit	
JEFDBH10.2	10.2mm DIN338 HSS Fully Ground Drill Bit	
JEFDBH10.3	10.3mm DIN338 HSS Fully Ground Drill Bit	
JEFDBH10.5	10.5mm DIN338 HSS Fully Ground Drill Bit	
JEFDBH12.0	12.0mm DIN338 HSS Fully Ground Drill Bit	
JEFDBH12.5	12.5mm DIN338 HSS Fully Ground Drill Bit	
JEFDBH12.7	12.7mm DIN338 HSS Fully Ground Drill Bit	
JEFDBH13.0	13.0mm DIN338 HSS Fully Ground Drill Bit	

# M35 COBALT DRILL BITS

and heat resistance. Produced in accordance to DIN 338 standard for high pressure and accuracy. Cobalt bits cut faster and longer.

# **M35 COBALT 19 PIECE DRILL BIT SET**

#### JEFDBSG19M35



- · M35 contains 5% cobalt meaning it will cut faster and last longer
- · Includes: 1, 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, 7.5, 8, 8.5, 9, 9.5, and 10mm
- · 135° Split point tip
- · M35 thread size
- · 5% Cobalt
- DIN338

PRICE EX. VAT

## **M35 COBALT 25 PIECE DRILL BIT SET**

#### JEFDBSG25M35



- · M35 contains 5% cobalt meaning it will cut faster and last longer
- Includes: 1, 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, 7.5, 8, 8.5, 9, 9.5, 10, 10.5, 11, 11.5, 12, 12.5, 13mm
- · 135° Split point tip
- · M35 thread size
- · 5% Cobalt
- · DIN338



# **INDIVIDUAL M35 COBALT DRILL BITS**



		DDIOF
PRODUCT	DESCRIPTION	PRICE EX. VAT
JEFDBM35-02.0	2.0mm M35 Cobalt Drill Bit	
JEFDBM35-02.5	2.5mm M35 Cobalt Drill Bit	
JEFDBM35-03.0	3.0mm M35 Cobalt Drill Bit	
JEFDBM35-03.5	3.5mm M35 Cobalt Drill Bit	
JEFDBM35-04.0	4.0mm M35 Cobalt Drill Bit	
JEFDBM35-04.5	4.5mm M35 Cobalt Drill Bit	
JEFDBM35-05.0	5.0mm M35 Cobalt Drill Bit	
JEFDBM35-05.5	5.5mm M35 Cobalt Drill Bit	
JEFDBM35-06.0	6.0mm M35 Cobalt Drill Bit	
JEFDBM35-06.5	6.5mm M35 Cobalt Drill Bit	
JEFDBM35-07.0	7.0mm M35 Cobalt Drill Bit	
JEFDBM35-07.5	7.5mm M35 Cobalt Drill Bit	
JEFDBM35-08.0	8.0mm M35 Cobalt Drill Bit	
JEFDBM35-08.5	8.5mm M35 Cobalt Drill Bit	
JEFDBM35-09.0	9.0mm M35 Cobalt Drill Bit	
JEFDBM35-09.5	9.5mm M35 Cobalt Drill Bit	
JEFDBM35-10.0	10.0mm M35 Cobalt Drill Bit	
JEFDBM35-10.5	10.5mm M35 Cobalt Drill Bit	
JEFDBM35-11.0	11.0mm M35 Cobalt Drill Bit	
JEFDBM35-11.5	11.5mm M35 Cobalt Drill Bit	
JEFDBM35-12.0	12.0mm M35 Cobalt Drill Bit	
JEFDBM35-12.5	12.5mm M35 Cobalt Drill Bit	
JEFDBM35-13.0	13.0mm M35 Cobalt Drill Bit	

# M2 DRILL BITS

## **M2 19 PIECE DRILL BIT SET**

# JEFDBSG19M2



- · M2 is the industry standard and offers high wear resistance
- · Includes: 1, 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, 7.5, 8, 8.5, 9, 9.5, and 10mm
- · 135° Split point tip
- · M2 thread size
- DIN338

PRICE EX. VAT

## **M2 25 PIECE DRILL BIT SET**

#### JEFDBSG25M2



- · M2 is the industry standard and offers high wear resistance
- · Includes: 1, 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, 7.5, 8, 8.5, 9, 9.5, 10, 10.5, 11,11.5, 12, 12.5, and 13mm
- · 135° Split point tip
- · M2 thread size
- DIN338

# **SAWS & BLADES**

# 355MM TCT METAL CUTTING CHOI

- · This is a hand-operated, industrial chop saw and has been designed fo angle iron, pipe, aluminium and wood materials
- · High-speed carbide-tipped blade cuts easily and effectively to produce
- · Fast action swivel vice enables cuts to be made from 0-45°
- · Hi-torque gearbox reduces motor load and improves performance
- · Pull-out collection tray makes it easy to dispose of waste debris

12mm (1/2")

120mm<sup>2</sup> (4¾")

130mm<sup>2</sup> (5 <sup>1</sup>/<sub>s</sub>)

120mm<sup>2</sup> (4¾")

- · Max. Speed: 1500rpm
- · Blade Diameter: 355mm / 14"
- · Blade Bore / Arbor: 25.4mm / 1"
- · Blade Kerf: 2.4mm / .094"
- · Sound Pressure Level: 108dB

**CUTTING CAPACITIES** 

80mm<sup>2</sup> (3 <sup>1</sup>/<sub>o</sub>)

95 x 180mm

(3¾ x 7 ½)

- · Sound Power Level: 121dB
- · Vibration Level: 1.39m/s2
- · Protection Class: I
- · Ingress Protection: IP20

INCLUDES

BI ADE

355MM CUT OFF SAW (COMES WITH 5 X 14" METAL CUTTING DISCS)

· Weight: 28kg

P SAW & BLADE	BLADE GUARD
or cutting mild steel, steel plate, square tube,	CONTROL HANDLE
a straight, burr-free clean edge	
<ul> <li>Supplied with:</li> <li>1x 14" / 355mm Mild Steel</li> <li>TCT Blade (66 teeth)</li> <li>1x 8mm blade locking hex key</li> <li>1x V-clamp jaw</li> </ul>	
FRONT SWIT VICE J.	
INDUSTRIAL	-(110V)- -(230V)-
<u> </u>	

PRODUCT	DESCRIPTION	INPUT VOLTAGE	MOTOR	INPUT CURRENT	PRICE EX. VAT
JEFTCTMCSW355-110	355mm TCT Metal Cutting Chop Saw (110V)	110V ~ 50Hz	2200W / 3.2HP	10A	
JEFTCTMCSW355-230	355mm TCT Metal Cutting Chop Saw (230V)	230V ~ 50Hz	1800W / 2.4HP	16A	

· Disc / Wheel Type: Fibre-Reinforced Metal Cutting

- $\cdot$  14" (355mm) cut-off saw for DIY and professional use
- · Powerful 2480W Motor
- · Ideal for cutting a variety of metallic materials including: steel pipe, box section, angle iron, steel bars etc.
- · Supplied with a Ø355mm abrasive metal cutting disc
- · Heavy-duty cast steel base and saw arm
- · Fitted with adjustable mitre vice
- · 0° & 45° left / right clamping and cutting angles
- · Ergonomic soft grip control handle
- · Spindle lock for convenient blade replacement
- · Safe operation with dead man's trigger control and blade guard
- · Portable fold-down design with carry handle
- · Motor Power: 2480W / 3.2HP
- · No Load Speed: 3800rpm

CL	ITTING CAPACIT	TES
	45°	90°
	56mm	100mm
	50mm	105mm
	50 x 50mm	105 x 105mm
	Ø 80mm	Ø 120mm

80 x 50mm

90 x 130mm



PRODUCT	DESCRIPTION	INPUT VOLTAGE	PLUG	PRICE Ex. Vat
KIT-JEFSWCFF14-110A	14" Cut Off Saw 110V & 5 x JEFD08PR0	110V ~ 50Hz	16A	
KIT-JEFSWCFF14-230A	14" Cut Off Saw 230V & 5 x JEFD08PR0	230V ~ 50Hz	13A	

UPPER BLADE GUARD

**355MM TCT METAL CHOP SAW BLADE** 

JEFTCTMCSW355-BS66

DESIGNED TO LAST UP TO

20 X LONGER THAN CONVENTIONAL
ABRASIVE DISCS



PRICE EX. VAT

# **TCT BLADES**

· Each of the Jefferson TCT blades come complete with bushings to accommodate for a range of saw sizes



# 6.5" TCT BLADES

DESCRIPTION	BORE	PRICE EX. VAT
6.5" TCT Blade 24T	20mm	
6.5" TCT Blade 48T	20mm	
6.5" TCT Blade 60T	20mm	
	6.5" TCT Blade 24T 6.5" TCT Blade 48T	6.5" TCT Blade 24T 20mm 6.5" TCT Blade 48T 20mm

#### **7" TCT BLADES**

	PRODUCT	DESCRIPTION	BORE	PRICE Ex. Vat
	JEFSAWB184-24	7" TCT Blade 24T	30mm	
2	JEFSAWB184-40	7" TCT Blade 40T	30mm	
	JEFSAWB184-58AP	7" TCT Blade 58T Aluminium & Plastic	30mm	

## 8" & 9" TCT BLADES


PRODUCT	DESCRIPTION	BORE	PRICE EX. VAT
JEFSAWB215-48	8" TCT Blade 48T	30mm	
JEFSAWB235-30	9" TCT Blade 30T	30mm	
3 JEFSAWB235-48	9" TCT Blade 48T	30mm	
	- ···· = ······		

## **10" TCT BLADES**

	PRODUCT	DESCRIPTION	BORE	PRICE EX. VAT
	JEFSAWB250-48	10" TCT Blade 48T	30mm	
	JEFSAWB250-60	10" TCT Blade 60T	30mm	
4	JEFSAWB250-80	10" TCT Blade 80T	30mm	

# 12" TCT BLADES

	PRODUCT	DESCRIPTION	BORE	PRICE Ex. Vat
	JEFSAWB305-48	12" TCT Blade 48T	30mm	
	JEFSAWB305-60	12" TCT Blade 60T	30mm	
5	JEFSAWB305-80	12" TCT Blade 80T	30mm	

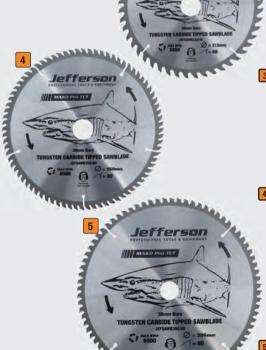

# MAGNETIC DRILLS

suited for use in building sites or the workshop environment and can be used to cut in horizontal, vertical and overhead positions. The magnetic drill uses an annular hole cutter (sometimes called a slugger bit) to cut clean and accurate holes without pre-drilling or step drilling. After cutting through the steel the cutter produces a "slug" (a cylindrical lump of steel) that falls from the centre of the cut.

## **40MM INDUSTRIAL MAGNETIC DRILL**

- · Maximum Cutting Capacity: 40mm
- · Maximum Cutting Depth: 30mm
- · Electro Magnetic Base Plate
- · Magnetic Adhesion: 14,000N / 1428kg
- · Motor: 1500W
- · No Load Speed: 800rpm
- · Dimensions: 250 x 80 x 340mm
- Weight: 10.25kg











PRODUCT	DESCRIPTION	VOLTAGE	PRICE Ex. Vat
JEFMGNDR40-110	40mm Industrial Magnetic Drill (110V)	110V	
JEFMGNDR40-230	40mm Industrial Magnetic Drill (230V)	230V	

# **65MM INDUSTRIAL MAGNETIC DRILL (110V)**

## JEFMAGD65HD-110

- · Maximum Cutting Capacity: 65mm
- · Maximum Tapping Diameter: M20mm
- · Maximum Twist Drill Diameter: 25mm
- · Maximum Cutting Depth: 50mm
- · Input Voltage: 110V
- · Magnetic Adhesion: 15,800N
- · Motor Power / Speed: 1890W
- · No Load Speed: 100-180/500rpm
- · Dimensions: 390 x 110 x 390mm
- · Weight: 28kg



**INCREDIBLE 15,800N** MAGNETIC ADHESION!

2 SPEED MECHANICAL GEARBOX

VARIABLE SPEED



# **40MM VARIABLE SPEED MAGNETIC DRILL**

- · Maximum Cutting Capacity: 40mm
- · Maximum Cutting Depth: 30mm
- · Magnetic Adhesion: 14,000N / 1428kg
- · Motor: 1500W
- · No Load Speed: 100 800 rpm
- · Dimensions: 250 x 80 x 340mm
  - · Weight: 10.25kg



100 - 800 RPM NO LOAD SPEED

SUPPLIED WITH BLOW MOULDED CASE





PRODUCT SPOTLIGHT

Includes: Chuck & SDS Adaptor WORTH





JEF JEF



PRODUCT	DESCRIPTION	VOLTAGE	PRICI EX. VA
FMAGD40VAR-110	40mm Variable Speed Magnetic Drill (110V)	110V	
FMAGD40VAR-230	40mm Variable Speed Magnetic Drill (230V)	230V	

35MM AUTOMATIC DRIVE MAGNETIC DRILL

#### JEFMAGDAUT35-230

This model features an automatic feed and return system (automatic cutting and return after cutting) for fast, efficient, accurate and safe core drilling.

SUPPLIED

WITH BLOW

MOULDED CASE

- · Maximum Cutting Capacity: 35mm
- · Maximum Cutting Depth: 35mm
- · Magnetic Adhesion: 16,000N
- Motor: 1600W
- No Load Speed: 760rpm
- · Dimensions:
- 420 x 180 x 350mm
- · Weight: 20.5kg



PRICE EX. VAT

# 40MM TUNDRA MINI MAGNETIC DRILL (110V)

## TUNDRMAGM40-110

- · Maximum Cutting Capacity: 40mm
- · Maximum Cutting Depth: 35mm
- · Magnetic Adhesion: 14,500N / 1478kg
- · Motor: 1650W
- · No Load Speed: 500rpm
- · Dimensions: 260 x 80 x 250mm
- · Weight: 8.5kg

SUPPLIED WITH BLOW MOULDED CASE







INDUSTRIAL



INCREDIBLE 14,000N MAGNETIC ADHESION!



INCREDIBLE 16,000N MAGNETIC ADHESION!



# MAGNETIC DRILL ACCESSORIES

# **BLACK CUT SLUGGER BITS**

- · The perfect accessory alongside your Jefferson Magnetic Drill
- · HSS annular hole cutters, offer fast and accurate hole drilling
- · Complete with a Weldon shank and are available in two lengths, 25mm and 50mm
- · The unique cutting teeth design continues to deliver peak performance, extending work-life well beyond that of our competitors

DESIGNED TO CUT UP TO **50%** MORE THAN CONVENTIONAL BITS



25MM	SHORT	SLUGGERS

		PRICE
PRODUCT	SIZE	EX. VAT
JEFSLGS12	12mm	
JEFSLGS13	13mm	
JEFSLGS14	14mm	
JEFSLGS15	15mm	
JEFSLGS16	16mm	
JEFSLGS17	17mm	
JEFSLGS18	18mm	
JEFSLGS19	19mm	
JEFSLGS20	20mm	
JEFSLGS21	21mm	
JEFSLGS22	22mm	
JEFSLGS23	23mm	
JEFSLGS24	24mm	
JEFSLGS25	25mm	
JEFSLGS26	26mm	
JEFSLGS27	27mm	
JEFSLGS28	28mm	
JEFSLGS30	30mm	
JEFSLGS32	32mm	
JEFSLGS33	33mm	
JEFSLGS34	34mm	
JEFSLGS35	35mm	
JEFSLGS36	36mm	
JEFSLGS38	38mm	
JEFSLGS40	40mm	
JEFSLGS42	42mm	
JEFSLGS45	45mm	
JEFSLGS50	50mm	



50MM LO	NG SLUGGERS	
PRODUCT	SIZE	PRICE EX. VAT
JEFSLGL12	12mm	
JEFSLGL13	13mm	
JEFSLGL14	14mm	
JEFSLGL15	15mm	
JEFSLGL16	16mm	
JEFSLGL17	17mm	
JEFSLGL18	18mm	
JEFSLGL19	19mm	
JEFSLGL20	20mm	
JEFSLGL21	21mm	
JEFSLGL22	22mm	
JEFSLGL23	23mm	
JEFSLGL24	24mm	
JEFSLGL25	25mm	
JEFSLGL26	26mm	
JEFSLGL27	27mm	
JEFSLGL28	28mm	
JEFSLGL30	30mm	
JEFSLGL32	32mm	
JEFSLGL34	34mm	
JEFSLGL35	35mm	
JEFSLGL36	36mm	
JEFSLGL38	38mm	
JEFSLGL40	40mm	

PILOT BITS						
PRODUCT	DESCRIPTION	PRICE Ex. Vat				
JEFSLGPILOTS	Short Slugger Bit Pilot Bit					
JEFSLGPILOTL	Long Slugger Bit Pilot Bit					



# 90° MAGNETIC DRILL COUNTERSINK BITS

- Spiral flute
- Manufactured from tough, high speed steel
- · 90° head angle
- · Weldon shank
- · 3 flute design






PRODUCT	DESCRIPTION	PRICE Ex. Vat
JEFMAGDCS30	30mm 90° Magnetic Drill Countersink Bit	
JEFMAGDCS50	50mm 90° Magnetic Drill Countersink Bit	

# **TCT SLUGGER BITS**

The range of Jefferson sluggers have a Tungsten Carbide Tip which extend the life span of the slugger. They are ideal for high performance drilling through Steel, Stainless Steel, Grey Cast Iron, Aluminium, Copper, Brass, Tin and many more. Each slugger is 35mm in length, and ranges from 12mm to 40mm in diameter, making them ideal for any job.

PRODUCT	DESCRIPTION	PRICE EX. VAT
JEFSLG35TCT12	12mm TCT Slugger Bit	
JEFSLG35TCT14	14mm TCT Slugger Bit	
JEFSLG35TCT16	16mm TCT Slugger Bit	
JEFSLG35TCT18	18mm TCT Slugger Bit	
JEFSLG35TCT20	20mm TCT Slugger Bit	
JEFSLG35TCT22	22mm TCT Slugger Bit	
JEFSLG35TCT24	24mm TCT Slugger Bit	
JEFSLG35TCT25	25mm TCT Slugger Bit	
JEFSLG35TCT26	26mm TCT Slugger Bit	
JEFSLG35TCT28	28mm TCT Slugger Bit	
JEFSLG35TCT30	30mm TCT Slugger Bit	
JEFSLG35TCT32	32mm TCT Slugger Bit	
JEFSLG35TCT35	35mm TCT Slugger Bit	
JEFSLG35TCT40	40mm TCT Slugger Bit	






## **TCT SLUGGER BIT PILOT BITS**

- · JEFSLGTCTPIL01 size: 6.34 x 90mm
  - Compatible with Jefferson TCT Slugger Bits in sizes 12-16mm
- · JEFSLGTCTPIL02 size: 7.98 x 90mm

Compatible with Jefferson TCT Slugger Bits in sizes 18-40mm

PRICE Ex. Vat





# **CORE DRILL BITS (WET)**

- · Ideal accessories for use with an electric core drill in order to drill into hard surfaces
- · 1 1/4" female thread



PRODUCT	DESCRIPTION	PRICE Ex. Vat
1 JEFCB051-450	Wet Core Bit 51 x 450mm	
2 JEFCB108-450	Wet Core Bit 108 x 450mm	
3 JEFCB127-450	Wet Core Bit 127 x 450mm	
4 JEFCB152-450	Wet Core Bit 152 x 450mm	

# **5 PIECE DRY CORE DRILL KIT**

## JEFCB5S42-150

- · 5 x Core Drill Bits including sizes:
- 42mm x 150mm
- 52mm x 150mm
- 65mm x 150mm
- 117mm x 150mm
- 127mm x 150mm
- 110mm Chuck Adaptor
   & 110mm SDS Adaptor
- 250mm Chuck Adaptor
   & 250mm SDS Adaptor
- · Drift Key
- · A-Taper Drill Bit



# PROFESSIONAL BANDSAWS

# 7" BANDSAW BELT DRIVEN ON WHEELS

# JEFBAN180-Q7W

- · Motor: 0.75kW (230V)
- · Belt Driven
- · Blade Size: 2360 x 20 x 0.9mm
- · Blade Speed: 34, 41, 59, 98m/min
- · Pivoting band holder bow: 0 60°
- · Dimensions (H X W): 1260 x 1100mm
- · Weight: 145kg



CUTTING CAPACITIES					
Angle Shape Length					
@ 90°		180mm			
@ 90		180mm x 300mm			
@ 45°	•	100mm			
@ 45°		170mm x 300mm			

PRICE EX. VAT





BEST




JEFBAN260-10


# **8" SWIVEL HEAD BANDSAW**

# JEFBAN200-08

- · With powerful 1.1kw motor (single phase 230V~50Hz)
- · Equipped with gearbox drive, cast iron 0-60° swivelling arm with hydraulic cylinder, roller-bearing blade guides, coolant pump and control panel
- · Safe and efficient use with blade guards, micro-switches and auto-cutoff system
- · Ideal in metal-working workshops where durability, precision, quality and high cutting speeds are essential
- · Swivel Head
- · Motor: 1.1kW (230V) Gear Box Driven
- · Blade Size: 2085 x 20 x 0.9mm
- · Blade Speed: 80m/min
- · Pivoting band holder bow: 0 60°
- · Dimensions (H X W): 1620 x 1500mm
- · Weight: 173kg





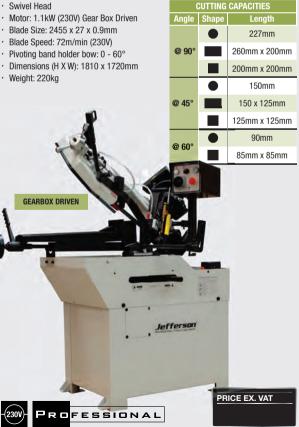







# INDUSTRIAL BANDSAWS

## **8" SWIVEL HEAD BANDSAW**

## **10" SWIVEL HEAD BANDSAW**

Jefferson


INDUSTRL


#### JEFWE210S

## JEFWE260S

- · Equipped with gearbox drive, cast iron 0-60° swivelling arm with hydraulic cylinder, roller-bearing blade guides, coolant pump and control panel
- · Safe and efficient use with blade guards, micro-switches and auto-cutoff system
- · Ideal in metal-working workshops where durability, precision, quality and high cutting speeds are essential
- · Swivel Head
- · Motor: 0.75kW (230V) Gear Box Driven
- · Blade Size: 2110 x 20 x 0.9mm
- · Blade Speed: 90m/min
- · Pivoting band holder bow: 0 60°
- · Dimensions (H X W): 1620 x 1500mm







- · Blade Size: 2460 x 27 x 0.9mm
- · Blade Speed: 72 m/min (230V)
- · Pivoting band holder bow: 0 60°
- · Dimensions (H X W): 1870 x 1720

٠	Weight:	216kg
---	---------	-------









# **18" SWIVEL HEAD BANDSAW**

- · Motor: 1.5kW (230V) or (415V) Belt Driven - Variable Speed
- · 450 x 225mm Cut Capacity
- · Blade Size: 10' 11 3/4" x 1" 3340 x 25mm
- · Dimensions (L X W): 1828 x 762mm
- · Weight: 420kg



JEF918S3

18" Swivel Head Bandsaw (3 Phase)



225mm

# GRINDING & POLISHING

## **BENCH GRINDERS**

All Jefferson bench grinders are pre-drilled











PRODUCT	DESCRIPTION	DIAMETER	ОИТРИТ	GRINDING WHEEL DIMENSIONS	GRINDING Wheel Bore	GRINDING SPEED	WEIGHT	PRICE EX. VAT
1 JEFBGS06	6" Bench Grinder 1/2HP	150mm	370W/1/2HP	150 x 20mm	12.7mm	2850rpm	9.5kg	
2 JEFBGS08	8" Bench Grinder 3/4HP	200mm	550W / 3/4HP	200 x 25mm	15.8mm	2850rpm	13kg	






PRODUCT	DESCRIPTION	DIAMETER	OUTPUT	GRINDING WHEEL DIMENSIONS	GRINDING Wheel Bore	GRINDING SPEED	WEIGHT	PRICE EX. VAT
3 JEFBG6	6" Industrial Bench Grinder	150mm	500W	150 x 25mm	32mm	2950rpm	16.5kg	
4 JEFBG8	8" Industrial Bench Grinder	200mm	900W	200 x 32mm	32mm	2950rpm	26.5kg	

# **BENCH GRINDER ADJUSTABLE STAND**

# JEFBGSSTDADJ

- · Built-in accessory tray and compartment for storing spare grinding wheels, safety goggles etc.
- · Pre-set working heights from 700-900mm
- · Heavy duty cast iron base for added stability.
- · Power cable hook for safe storage of grinder power cords
- · Dimensions: 315 x 250 x 700-900mm (adjustable height)
- · Weight: 17.0kg





ONLY COMPATIBLE WITH **BENCH GRINDERS** 

## **BELT LINISHERS**

- · The Jefferson Belt Linishers are ideally used to conduct surface polishing and grinding of metal and non-metal parts, to enhance the roughness and glossiness of spare parts surface.
- · Highly efficient in the grinding of materials, its industrial construction makes it an ideal substitute for polishing machines.
- · Belt Speed: 30m/s
- · High performance 2800rpm belt sander
- · Quick change belt system
- · Premium swallow tail structure to ensure the belt off-tracking
- · 100mm outlets for dust extraction
- · Tilting head for different working height
- · Overload protection on motors
- · Sound Power: LWA = 94.5 dB(A)LWA = 103 dB(A) on load









	PRODUCT	DESCRIPTION	BELT SIZE	INPUT SUPPLY	TABLE SIZE	DIMENSIONS	WEIGHT	PRICE EX. VAT
1	JEFBLTSND075-230	75mm Belt Linisher (230V)	75 x 2000mm	2200W / 2800rpm	75 x 460mm	480 x 1000 x 580mm	63kg	
	JEFBLTSND075-400	75mm Belt Linisher (400V) NEW!	75 x 2000mm	2600W / 2800rpm	75 x 460mm	480 x 1000 x 580mm	63kg	
2	JEFBLTSND150-230	150mm Belt Linisher (230V)	150 x 2000mm	2200W / 2800rpm	150 x 460mm	540 x 1000 x 610mm	81kg	
	JEFBLTSND150-400	150mm Belt Linisher (400V)	150 x 2000mm	2400W @ 1400rpm 2800W @ 2800rpm	150 x 460mm	540 x 1000 x 610mm	81kg	

# **HEAT GUNS**

## **ELECTRONIC HEAT GUN VARIABLE (230V)**

## JEFHTGVAR-230

- · Power Supply: 2000W
- · Voltage: 230V / 50Hz
- · Air Temp / Flow: 50-450° 250L/min (Low Setting) 60-600° 500L/min (High Setting)
- · With built in overheat protection
- · Includes JEFHTGAS 5 Piece Heat Accessory Kit





## **ELECTRONIC HEAT GUN 2 STAGE (230V**

## JEFHTG2S-230

- · Power Supply: 2000W
- · Voltage: 230V / 50Hz
- · With built in overheat protection
- · Air Temp / Flow: 450° 300L/min (Low Setting) 600° 500L/min (High Setting)





RIJIT IN STAND ALLOWS FOR HANDS FREE USE



## **5 PIECE HEAT GUN ACCESSORY KIT**

## **JEFHTGAS**

This five piece accessory kit from Jefferson includes the following:

- · Spoon reflector nozzle
- · Cone nozzle
- · Glass protection nozzle
- · Fish tail surface nozzle
- · Paint & varnish scraper





## **DIGITAL ELECTRONIC HEAT GUN (110V)**

## JEFHTG-110

- · Input Power: 110V
- · Output: 2000W
- · Heat Range: 50-630°C
- · Constant heat control (overload protection)
- · 5 air flow settings for a wide range of applications
- · Removable front ring enables working in hard-to-reach places
- · Stable stationary position for safe hands-free use







# **CEMENT MIXERS**

## **ORANGE PETROL CEMENT MIXER 2.0HP (LONCIN ENGINE)**

## JEFCEMPETORG-L

- · A powerful and reliable petrol driven cement mixer with quality 2.0HP Loncin engine
- · Drum tilt action allows for easy pouring & cleaning
- · Orange powder coated finish with UV-Protection
- · Compact and portable for easy transportation
- · Fitted with barrow height swivel
- · Complete with rubber wheels and 4 legged stand for a steady and stable working platform
- · Proven robust and durable design
- · Engine: Loncin 2.0HP Stage V OHV Petrol
- · Starting System: Recoil
- · Drum Capacity: 130L / 5ft3
- · Batch Output: 70L / 2.5ft3
- · Drum Diameter: 610mm
- · Drum Speed: 24rpm @ 2800rpm
- · Discharge Outlet Height: 1040mm
- · Wheel Size: 250 x 65mm
- · Guaranteed Sound Power Level: 101dB Lwa
- · Operating Dimensions: 1380 x 1100 x 620mm
- · Storage Dimensions: 930 x 660 x 930mm
- · Weight: 75kg









## **ELECTRIC CEMENT MIXERS**

- · Stand incorporates tilt and turn mechanism
- · 130 Litre Belle-type mixer
- · Wheeled unit with supplied static stand
- · Portable cement mixer
- · All steel construction
- · 4 legged stand for a steady and stable working platform
- · Motor: 0.5HP Single Phase
- · Speed: 1440rpm
- · Voltage: 110V / 230V
- · Drum Diameter: 610mm
- · Drum Capacity: 130L / 5ft3 · Batch Output: 70L / 2.5ft3
- · Discharge Outlet Height: 1040mm
- · Wheel Size: 255 x 65mm
- · Protection Rating: IP44
- · Guaranteed Sound Power Level: 90dB Lwa
- · Operating Dimensions: 1380 x 1100 x 620mm
- · Storage Dimensions: 720 x 660 x 660mm
- · Weight: 72kg











## **ELECTRIC HAND MIXER**

- · Ergonomic soft grip
- · Class II insulation
- · External accessible brushes for greater serviceability & longer motor life
- · Infinitely variable speed for power transmission without splashing
- · Ideal for mixing sticky & viscous materials e.g. tile adhesive, bonding, mortar, joint compound, ready-mixed plaster, floor screen & fillers
- · Strong welded joints for strength & safety
- · Continuous guard ring protects the tub which quarantees smooth and safe rotation
- · Powerful 1400W motor
- · Speeds: 0-480rpm / 0-80rpm







- · Mixing Volume: 120L
- Paddle Dimensions: Diameter:140mm Length: 600mm Fitting: 2x M14
- Protection Rating: IP20
- Guaranteed Sound Power Level: 98dB Lwa
- Total Weight: 5.4kg Mixer: 4.1kg Paddle: 1.3kg



PRODUCT	DESCRIPTION	VOLTAGE	PRICE Ex. Vat
JEFEHM2-110	Electric Hand Mixer (110V)	110V	
JEFEHM2-230	Electric Hand Mixer (230V) NEW!	230V	





## **26 LITRE FLEXITUBS** · Frost proof · 26 litre capacity · Strong handles for easy carrying · Available in black, yellow or green · Ideal for gardens, homes, stables, construction sites and a huge range of alternative applications

PRODUCT	DESCRIPTION	PRICE Ex. Vat
1 JEFFLXTUB26-B	26 Litre Flexitub (Black)	
2 JEFFLXTUB26-Y	26 Litre Flexitub (Yellow)	
3 JEFFLXTUB26-G	26 Litre Flexitub (Green)	

## **42 LITRE FLEXITURS**

- · Frost proof
- · 42 litre capacity
- · Handles tested to 150kg
- · Strong handles for easy carrying
- · Available in black, yellow or green
- · Ideal for gardens, homes, stables, construction sites and a huge range of alternative applications

	PRODUCT	DESCRIPTION	PRICE Ex. Vat
1	JEFFLXTUB42-B	42 Litre Flexitub (Black)	
2	JEFFLXTUB42-Y	42 Litre Flexitub (Yellow)	
3	JEFFLXTUB42-G	42 Litre Flexitub (Green)	



- · Heavy duty design
- · Weather resistant
- · High rubber content that allows the material to bend and flex
- · Comfort grip handle
- · Ideal for mixing, pouring liquid, transporting waste and rubbish
- · Internal fill markings for accurate measurements of liquids and powders





## **5 GALLON WHITE** PLASTERERS BUCKET

## JEFBTPL5G

- · Heavy duty bucket which can be used for mixing plaster
- · Strong wire handle with plastic grip






MADE IN

# WET & DRY VACUUMS

## **STAINLESS STEEL WET & DRY VACUUM CLEANERS**





- · JEFVACWDSS-20 &
- · JEFVACWDSS-30
- Accessories Included:
- Metal Telescopic Tube
- Advanced Floor Brush
- · Cloth Filter
- · Round Brush Nozzle
- · Crevice Nozzle
- · Suction Hose



· JEFVACWDSS-60

- · Accessories Included:
- · 2-Piece Metal Tube
- · Floor Brush
- · Wiper Brush
- · Round Brush Nozzle
- Crevice NozzleSuction Hose
- Needle Punching Cotton Filter







	PRODUCT	DESCRIPTION	CAPACITY	RATED INPUT POWER	AIR FLOW RATE	VACUUM SUCTION	TANK DIAMETER	PRICE Ex. Vat
1	JEFVACWDSS-20	20 Litre Stainless Steel Wet and Dry Vacuum Cleaner	20L	1200W	1.8m³/Min	20Kpa	295mm	
2	JEFVACWDSS-30	30 Litre Stainless Steel Wet and Dry Vacuum Cleaner	30L	1200W	1.8m³/Min	20Kpa	295mm	
3	JEFVACWDSS-60	60 Litre Stainless Steel Wet and Dry Vacuum Cleaner	60L	2000W	2x3.2m³/Min	22Kpa	410mm	

## **PAPER DUST BAGS**



PRODUCT	DESCRIPTION	PRICE Ex. Vat
JEFVACWD020-016	Paper Dust Bag 20L compatible with JEFVACWD025-230N	
JEFVACWD035-016	Paper Dust Bag 35L compatible with JEFVACWD035-230N	

## **90 LITRE WET & DRY VACUUM CLEANERS**

- · Capacity: 90L
- · Rated Voltage: 230V / 110V
- · Rated Input Power: 2000W
- · Cooling Mode: Air Circulation
- · Suction: 250 bar
- · Air Flow: 120L/s
- · Attachment Spec: 40mm
- · Function: Wet / Dry
- · Power Cord: 8m
- · Weight: 23kg
- Insulation: IPX4

## Accessories Included:

- · Round Brush
- · Long Flat Nozzle
- · Dust Vacuum Head
- · Water Vacuum Head
- · Steel Pipe
- · Flex Hose









PRODUCT	DESCRIPTION	PRICE EX. VAT
JEFVACWD090-110	90 Litre Wet & Dry Vacuum Cleaner (110V)	
JEFVACWD090-230	90 Litre Wet & Dry Vacuum Cleaner (230V)	

## 90 LITRE WET & DRY VACUUM CLEANER ACCESSORIES

· A range of accessories for the JEFVACWD090-110 & JEFVACWD090-110 90 Litre Wet & Dry Vacuum Cleaners



**NEW!** 

# PRODUCT SPOTLIGHT

# **ROTOMOLD INDUSTRIAL DRUM FAN**

The main body of the fan is manufactured using a rotational-moulding plastic construction, which allows for higher levels of endurance during extreme temperatures and rough impact in comparison to traditional thin metal drum fans. The HDPE construction results in outstanding durability able to withstand the dust and debris in harsh environments for extended periods of time.

- · Corrosion and impact resistant plastic rotational-moulded body
- · Fan Type: Axial
- · 110V and 240V Options
- · For industrial application use
- · 3 fan speeds
- · Large wheels allow easy movement.
- · Easy to use, easy to clean
- · 3m cable

STACKABLE BOTH VERTICALLY AND HORIZONTALLY













PRODUCT	VOLTAGE	MOTOR (W)	AIR VOLUME (M³/HR)	FAN DIAMETER	MAX. RPM	NOISE (DBA)
JEFRFANIND24-110	110V / 50Hz	157	9700	600mm / 24"	1040	81
JEFRFANIND24-230	230V / 50Hz	185	11700	600mm / 24"	1240	81
JEFRFANIND36-110	110V / 50Hz	260	15100	900mm / 36"	600	76
JEFRFANIND36-230	230V / 50Hz	294	16200	900mm / 36"	690	80

PRODUCT	DESCRIPTION	DIMENSIONS	WEIGHT	PRICE EX. VAT
JEFRFANIND24-110	24" Rotomold Industrial Drum Fan 110V	690 x 250 x 710	15kg	
JEFRFANIND24-230	24" Rotomold Industrial Drum Fan 230V	690 x 250 x 710	15kg	
JEFRFANIND24-110	24" Rotomold Industrial Drum Fan 110V	975 x 320 x 1005	26.5kg	
JEFRFANIND24-230	24" Rotomold Industrial Drum Fan 230V	975 x 320 x 1005	26.5kg	

# AIR CONDITIONING

Our powerful portable air conditioners are great cooling solutions offering additional ventilation and dehumidifying functions for circulating air and removal of moisture. As self-contained systems, permanent installation is not required, allowing for use in commonly used spaces such as kitchens, bedrooms, computer rooms, and garages where installation of an outdoor unit is limited.

## 9,000 BTU/HR PORTABLE AIR CONDITIONER / DEHUMIDIFIER / AIR COOLER WITH WINDOW SEALING KIT

## JEFPAC09

- · Cooling Capacity: 9,000 Btu/h
- · Rated Voltage: 240V
- · Rated Frequency: 50Hz
- · Rated Input Power: 1005W
- · Rated Input Current: 4.5A
- · IP Rating: IPX1
- · Sound Power Level: ≤65db(A)
- · Refrigerant Charge: R290 170g
- · Dimensions: 475 x 380 x 877mm
- · Net Weight: 22.5kg
- · Maximum suction/exhaust side working pressure: 0.7MPa / 3.2MPa
- · Max. permissible pressure on the high/low pressure side: 3.2MPa
- · Heat exchanger max allowable pressure: 3.2MPa








**NEW!** 





**NEW!** 

## 12,000 BTU/HR PORTABLE AIR CONDITIONER / DEHUMIDIFIER / **AIR COOLER / HEATER WITH WINDOW SEALING KIT**

4 IN 1

## JEFPAC12

- · Cooling Capacity: 12,000 Btu/h
- · Rated Voltage: 240V
- · Rated Frequency: 50Hz
- · Rated Input Power: 1330W
- · Rated Input Current: 5.85A
- · IP Rating: IPX1
- · Sound Power Level: ≤65db(A)
- · Refrigerant Charge: R290 195g
- · Dimensions: 380 x 356 x 875mm
- · Net Weight: 28kg
- · Maximum suction/exhaust side working pressure: 0.7MPa / 3.2MPa
- · Max. permissible pressure on the high/low pressure side: 3.2MPa
- · Heat exchanger max allowable pressure: 3.2MPa











PRICE EX. VAT

# HIGH VELOCITY FANS

High-velocity three-speed drum fans capable of moving large volumes of air. Durable and robust design with heavy-duty gauge steel casing, guard and frame. Cradle stand with tilt function allows flexible control of airflow when required. Balanced and fully guarded blades provide quiet and safe operation. Suitable for use in industrial, commercial, agricultural, automotive workshop and on-site applications. Energy efficiency tested according to EU 206/2012 regulations and standards (ERP Compliant).

## **18" HIGH VELOCITY DRUM FAN 230V**

## JEFFANDRM18-230E

- · A high-velocity three-speed drum fan capable of moving large volumes of air
- · Durable and robust design with heavy-duty gauge steel casing, guard, handle, wheels and frame
- · Cradle stand with tilt function allows flexible control of airflow when required
- · Balanced and fully quarded blades provide quiet and safe operation
- Suitable for use in industrial, commercial, agricultural, automotive workshop and on-site applications
- Energy efficiency tested according to EU 206/2012 regulations and standards (ERP Compliant)
- · Voltage ~ Frequency: 230V (3A)
- · Fan Diameter: 18" (460mm)
- · Power: 110W
- · Speed:
- High: 1354rpm
- Mid: 1257rpm
- Low: 1168rpm
- · Air Flow:

High: 128.87cmm / 4551cfm / 3353 cmh Mid: 78cmm / 2755 cfm / 2765 cmh Low: 52 cmm / 1836 cfm / 1828 cmh

· Weight: 5.7kg





- $\,\cdot\,$  A high-velocity three-speed floor fan capable of moving large volumes of air
- $\boldsymbol{\cdot}$  Durable and robust design with heavy-duty gauge steel casing, guard and frame
- $\boldsymbol{\cdot}$  Cradle stand with tilt function allows flexible control of airflow when required
- ${\boldsymbol{\cdot}}{}$  Balanced and fully guarded blades provide quiet and safe operation
- Suitable for use in industrial, commercial, agricultural, automotive workshop and on-site applications
- Energy efficiency tested according to EU 206/2012 regulations and standards (ERP 206 Compliant)
- · Voltage ~ Frequency: 230V (3A)
- · Fan Diameter: 20" (510mm)
- · Power: 111W
- · Speed:
- High: 1337rpm Mid: 1198rpm
- Low: 1107rpm
   Air Flow:

High: 112cmm / 3948cfm Mid: 92cmm / 3242cfm Low: 65cmm / 2290cfm

· Weight: 5kg





## **24" HIGH VELOCITY DRUM FANS**

- · A high-velocity two-speed drum fan capable of moving large volumes of air
- · Durable and robust design with heavy-duty gauge steel casing, guard, handle, wheels and frame
- · Cradle stand with tilt function allows flexible control of airflow when required
- · Balanced and fully guarded blades provide quiet and safe operation.
- · Suitable for use in industrial, commercial, agricultural, automotive workshop and on-site applications
- · Energy efficiency tested according to EU 206/2012 / EU 327/2011 regulations and standards (ERP Compliant)

  • Voltage ~ Frequency: 230V ~ 50Hz (13A)
- · Fan Diameter: 24" (640mm)
- · Weight: 16.84kg

## 110V Model

- · Power: 123W · Sneed:
  - High: 912rpm Low: 838rpm
- · Air Flow:
  - High: 219cmm / 7734cfm / 12180cmh Low: 179cmm / 5720cfm / 10740cmh
- · ErP Standard: ErP 206

## 230V Model

- Power: 330W
- · Sneed High: 1429rpm
- Low: 1316rpm Air Flow:

High: 256cmm / 9041cfm / 15360cmh Low: 216cmm / 7628cfm / 12960cmh

· ErP Standard: ErP 327















## **30" HIGH VELOCITY DRUM FAN 110V**

## JEFFANDRM30-110E

- · A high-velocity two-speed drum fan capable of moving large volumes of air
- · Durable and robust design with heavy-duty gauge steel casing, guard, handle, wheels and frame
- · Cradle stand with tilt function allows flexible control of airflow when required
- · Balanced and fully guarded blades provide quiet and safe operation
- · Suitable for use in industrial, commercial, agricultural, automotive workshop and on-site
- · Energy efficiency tested according to EU 206/2012 regulations and standards (ERP Compliant)
- · Voltage ~ Frequency: 110V ~ 50Hz (16A)
- · Fan Diameter: 30" (760mm)
- · Power: 123W
- · Speed:
- High: 900rpm Low: 830rpm

High: 284.4cmm / 10043cfm Low: 154cmm / 5438cfm

· Weight: 20.4kg





# INFRARED HEATERS

Infrared heating delivers fast, effective heat through the combustion of gases. The heat produced by infrared radiant energy, radiates downward warming objects such as the floor, machinery, tools and building components, as well as people in the room. Suitable for indoor and outdoor use, Infrared Heat replicates the feeling of warmth from the sun. Suitable for use with diesel, kerosene or paraffin fuel. Both designs include an LED thermostatic control with automatic cut-off for cost savings from reduced energy and fuel usage. Fitted with a timed ventilation system to help cool the combustion chamber. Designed with a tough powder-coated housing to enhance protection from the elements and the working environment.

## **INFRARED 75 HEATER**

## JEFHTRAD075TH

- · Voltage ~ Frequency: 230V ~ 50Hz
- · Power: 105W
- · Power Cable / Plug: 1770mm / 13A
- · Heat Output: 70,000 BTU/hr (20.5kW)
- · Average Heating Capacity: 14,000ft3 / 396m3
- · Fuel Consumption: 1.6L/hr
- · Fuel Type: Diesel / Kerosene / Paraffin



- · Maximum Running Time: 7 hours
- · Automatic Shut-Off: Yes Dimensions (LxWxH):
  - 576 x 330 x 575mm
- · Weight: 16.5kg



## **INFRARED 125 HEATER** JEFHTRAD125TC

- · Voltage ~ Frequency: 230V ~ 50Hz
- · Power: 59W
- · Heat Output: 125,000 BTU / 31,499 Kcal/h (36.6kW)
- Average Heating Capacity: 280m²
- · Fuel Consumption: 3.44 L/hour
- · Fuel Type: Diesel / Kerosene / Paraffin
- · Fuel Tank Capacity: 40L
- · Maximum Running Time: 12 hours
- · Dimensions (LxWxH): 1155 x 696 x 930mm
- · Weight: 43kg





# PTC INDUSTRIAL ELECTRIC FAN HEATERS

PTC heating is an efficient heat technology which uses heat conducting ceramic elements to produce superior, odour free heat within a small space. Fitted with a 13Amp plug, the PTC heater is ideal for domestic and industrial use

## **2000W PTC INDUSTRIAL ELECTRIC FAN HEATER**

## JEFHTPTC2.0-230

- · Power Supply: 230V / 50Hz
- · Air Displacement: 158m3/h
- · Heated area: 40m3
- · Summer Winter settings for ventilation
- · Fan Only Setting: 25W
- · Two Heat Settings: 1000W / 2000W
- · Weight: 1.7kg
- · Dimensions:
- 210 x 160 x 217mm







## **2800W PTC INDUSTRIAL ELECTRIC FAN HEATER**

## JEFHTPTC2.8-230

- Power Supply: 230V
- Required Power: 2800W
- · Current: 11 7A
- · Required Fuse: 13A
- · Fan Only Setting: 25W
- Two Heat Settings: 1900/2800W
- Self-resetting Thermostat: 85°C
- Weight: 2.4kg
- Dimensions: 200 x 220 x 280mm









# INFERNO SPACE HEATERS

When a direct oil heater is switched on the air fan draws in air, pressurises it and passes it through an air line to the burner head nozzle.

The air flow causes fuel to be drawn from the tank. The fuel and air mix is then sprayed into the combustion chamber. The mixture is automatically ignited by the spark plug and a high temperature heat stream is generated in the combustion chamber.

Air is drawn into the unit by a fan and is pushed around the cool chamber situated between the combustion chamber and outer casing. This fast flowing air sucks the heat stream out of the combustion chamber, providing the required heat.

- · High air displacement
- · Integral fuel gauge
- · Thermal protection for motor
- · Error indicator light
- · Electronic flame control
- Durable steel construction
- · Hard wearing, solid rubber wheels
- Fuel Type: Diesel/Kerosene/Paraffin
- · Powder coated housing remains cool to the touch
- · Adjustable thermostat to control heat output
- · Stainless steel combustion chamber
- · Trolley for easy mobility (105 & 150 models only)
- · Input power 230V

# SERVICE KITS FOR INFERNO SPACE HEATERS

- Service kits for JEFHTSPC060, JEFHTSPC105 & JEFHTSPC150
- Includes nozzle, fuel filter, output filter, lint filter & intake filter



PRODUCT	DESCRIPTION	PRICE Ex. Vat
KIT-JHTS060	Service Kit for JEFHTSPC060 Space Heater	
KIT-JHTS105	Service Kit for JEFHTSPC105 Space Heater	
KIT-JHTS150	Service Kit for JEFHTSPC150 Space Heater	









	PRODUCT	DESCRIPTION	THERMAL POWER	FUEL TANK Capacity	MAX FUEL CONSUMPTION	ENDURANCE (APPROX)	DIMENSIONS (LxWxH)	PRICE Ex. Vat
1	JEFHTSPC060	Inferno 60 Space Heater	60,000BTU/18kW	19 Litres	1.7L/hr	11 hours	813 x 297 x 424mm	
2	JEFHTSPC105	Inferno 105 Space Heater	105,000BTU/31kW	38 Litres	3.0L/hr	13 hours	918 x 584 x 625mm	
3	JEFHTSPC150	Inferno 150 Space Heater	150,000BTU/44kW	49 Litres	4.2L/hr	12 hours	1062x624x664mm	

# ELECTRIC PRESSURE WASHERS

## 1400W 105 BAR ELECTRIC PRESSURE WASHER HOME

## JEFPRWEL105

- · 3-axial stainless steel piston wobble-plate pump
- · Total stop system: automatic by-pass valve with pump head pressure discharge
- · Lightweight, compact body with wheels for easy portability and storage
- · Built-in thermal protector
- Voltage: 230V
- · Motor: 1400W
- · Protection Class: II
- · Inress Protection: IPX5
- · Rated Pressure: 75 bar / 7.5MPa
- · Allowable Pressure: 105 bar / 11MPa
- · Rated flow: 5.1L/min
- · Max. flow: 7L/min
- · Max. inlet pressure: 0.7MPA
- · Sound Pressure Level: 76dB(A)
- · Weight 5.8kg





## Accessories included as standard:

- · Trigger gun
- · Adjustable lance
- · Lance extension
- · Detergent tank
- · 5m High-pressure tube





**NEW!** 





5.1 LITRES PER MINUTE WATER FLOW



## 2000W 150 BAR ELECTRIC PRESSURE WASHER PLUS

## Accessories included as standard:

- · Metal trigger gun
- · Metal lance with adjustable nozzle
- · 8m steel armed high-pressure hose



## JEFPRWEL150

- · Induction motor for long service life without maintenance
- · 3-axial stainless steel piston wobble-plate pump
- · Total stop system: automatic by-pass valve with pump head pressure discharge
- · Built-in thermal protector
- · Voltage: 230V
- · Motor: 2000W
- · Protection Class: I
- · Inress Protection: IPX5
- · Rated Pressure: 11MPa
- · Allowable Pressure: 15MPa
- · Rated flow: 6.7L/min
- · Max. flow: 7.2L/min
- · Max. inlet pressure: 0.7MPA
- · Sound Pressure Level: 86dB(A)
- · Weight: 19.3kg







**6.7 LITRES PER MINUTE** WATER FLOW











PRICE EX.VAT

## 3000W 170 BAR ELECTRIC PRESSURE WASHER SEMI-PRO

## **NEW!**

## JEFPRWEL170

- · Induction motor for long service life without maintenance
- · 3-axial stainless steel piston wobble-plate pump
- · Total stop system: automatic by-pass valve with pump head pressure discharge
- · Built-in thermal protector
- · Voltage: 230V
- · Motor: 3000W
- · Protection Class: I
- · Inress Protection: IPX5
- · Rated Pressure: 140 bar / 14MPa
- · Allowable Pressure: 170 bar / 18MPa
- · Rated flow: 8.7L/min
- · Max. flow: 9.2L/min
- · Max. inlet pressure: 0.7MPA
- · Sound Pressure Level: 86dB(A)
- · Weight: 23kg



## Accessories included as standard:

- · Metal trigger gun
- · Metal lance with adjustable nozzle
- · 8m steel armed high-pressure hose







8.7 LITRES **PER MINUTE WATER FLOW** 





PRICE EX.VAT

**TURBO LANCE FOR JEFWASE360-120 & JEFWASE402-150 PRESSURE WASHER** 



**HANDLE/TRIGGER FOR JEFWASE360-120 &** 



**ADJUSTABLE LANCE FOR JEFWASE360-120** & JEFWASE402-150 PRESSUREWASHER

JEFWASEU-ADJNOZ PRICE EX.VAT

**HIGH PRESSURE HOSE FOR JEFWASE360-120** & JEFWASE402-150 **PRESSURE WASHER** 

JEFWASEU-HOSE



# PETROL PRESSURE WASHERS





12.6 LITRES
PER MINUTE
WATER FLOW

<u>MacGen</u>

INDUSTRIAL

PRICE EX.VAT

## **6.5HP GEARBOX PETROL PRESSURE WASHER** 5 PRESSURE NOZZLES: JEFWASPGR065HP 0°, 15°, 25°, 40°, 65° · Engine: Macgen 6.5HP · High Flow Rate: 12.6L/min · Rated Pressure: 2700psi/185bar GEARBOX DRIVEN Working Speed: 3400rpm · Water Flow: 12.6L/min / 756L/hr · Fuel Tank: 3.6L Capacity · Hose: 10m steel braided · Lance: 20" stainless steel · Weight: 43kg **CONTAINS A SOLID** BRASS PUMP AND A GEAR BOX DRIVE FOR LONGER LIFE OF THE PUMP



The Power of Experience

# SURFACE CLEANING





## JEFWASHPSCA15

Perfect for decks and patios. 10x faster than the standard spray mode, splashless cleaning.

- · Suitable for pressure washers capable of 2500 3000psi
- · Max Temperature: 60°C/140°F

1500rpm rotary head and steel rotary arm, nylon brush.



# PRESSURE WASHER ACCESSORIES

## **5 PIECE COMPLETE NOZZLE TIP SET**

## **JEFWASHQRNSET**

· Max. working pressure: 4000psi

All 5 tips in one set including:

- · 0° Red Cutting Tip Q/Release Nozzle JEFWASHQRN-R
- · 25° Green Flushing Tip Q/Release Nozzle JEFWASHQRN-G
- · Black Chemical Tip Q/Release Nozzle JEFWASHQRN-B
- · 15° Yellow Chiseling Tip Q/Release Nozzle JEFWASHQRN-Y
- · 40° White Washing Tip Q/Release Nozzle JEFWASHQRN-W



PRICE EX.VAT

## INDIVIDUAL NOZZLE TIPS

Fully compatible with most standard high pressure washers

## JEFWASHQRN-R

· 0° Red Cutting Tip Q/Release Nozzle

## JEFWASHQRN-G

· 25° Green Flushing Tip Q/Release Nozzle

## JEFWASHQRN-B

· Black Chemical Tip Q/Release Nozzle

## JEFWASHQRN-Y

· 15° Yellow Chiseling Tip Q/Release Nozzle

## JEFWASHQRN-W

· 40° White Washing Tip Q/Release Nozzle











FOR CHISELING















## **6 IN 1 NOZZLE WITH 1/4" COUPLER**

## **JEFWASHSION**

1/4" Quick Connect Coupler Max Pressure: 3000psi 6 Spraying patterns:

- · 0° High Pressure Jet
- · 15° Narrow area / Medium Jet
- · 25° Wide Area / Medium Jet
- · 40° General Cleaning Jet
- · 0° Soap Cleaning Jet
- · Soap, Spray and Rinse Jet



PRICE EX.VAT

## **OUICK RELEASE TURBO NOZZLE**

## **JEFWASHQRTN**

Increases the effective cleaning power of the pressure washer. The rotary motion of the jet increases surface area and intensity of spray. Ideal for getting stubborn dirt off any surface.

· Max working pressure: 3000psi



## **INLET SUCTION FILTER**

## JEFWASP75-SPIF

This heavy duty brass weighted filter from Jefferson fits to the end of your water pickup hose and will stop large particles of dirt being sucked into your machine blocking your filters and causing damage.



PRICE EX.VAT

## **GARDEN HOSE FILTER ATTACHMENT**

## **JEFWASHGHOSFA**

Permanent mesh screen filter does not need to be replaced and cleans easily. Reinforced with metal garden hose fitting 3/4" Male x Female swivel.

· Max temperature: 60°C/140°F



PRICE EX.VAT

## 7.6M PRESSURE HOSE

## JEFWASP65A-SP113

- · Compatible with JEFWASPET065HP-A
- · 6mm Diameter

WE

· Working Pressure: 3000psi / 207bar



## **10M HEAVY DUTY HYDRAULIC LANCE HOSE**

## JEFWAS12-SP001

- · 8mm Diameter
- · Suitable for high pressure washers 3600psi / 252bar
- · Complete with 3/8" quick release fittings
- · Compatible with JEFWASPGR065HP, JEFWASPET075HP, JEFWASPET130HP & TUNWAS12-100



## 20M SEWER CLEANING **HOSE KIT**

## **JEFWASHSEWCKIT**

- · 1/5" thermoplastic hose, built with M22 fitting and jetting nozzle
- · Max working pressure: 3000psi
- · Max temp: 60°C/140°F



# PRESSURE WASHER LANCES

## **36" PRESSURE WASHER GUN & LANCE** JEFWASPGR065-SP17 · Max. Pressure: 2700psi / 185bar · Max. Flow: 12.6L/min / 756L/hr COMPATIBLE WITH JEFWASPET075HP PRICE EX.VAT JEFWASPGR065HP & JEFWASPET130HP · 3/8" Male Connector (SEE PAGES 80 & 81) SEE COMPATIBLE · Lenath: 36" FITTINGS ON PG.85 **36" HIGH PRESSURE 2 PIECE LANCE GUN** JEFWAS12-SP002 · Max. Pressure: 5000psi / 350bar **COMPATIBLE WITH JEFWASPET075HP** · Max. Temperature: 60°C / 140°F PRICE EX.VAT JEFWASPGR065HP & JEFWASPET130HP · 3/8" Male Connector (SEE PAGES 80 & 81) SEE COMPATIBLE · Max. Flow: 30 L/min / 7.9GPM FITTINGS ON PG.85 PRESSURE SPRAY GUN AND LANCE FOR JEFWASPET065HP-A JEFWASP65A/SPGL · Max. Pressure: 4000psi / 275bar COMPATIBLE WITH · Hi-I o Nozzle PRICE EX.VAT JEFWASPET065HP-A · M22 Male Connector (SEE PAGE 80) SEE COMPATIBLE FITTINGS ON PG.85 M22 CONNECTOR COMPLETE WITH SOAP **36" HIGH PRESSURE 1 PIECE LANCE GUN** DISPENSING NOZZLE **JEFWASHLANHL** · Max. Pressure: 4000psi / 275bar · Hi-Lo Nozzle PRICE EX.VAT TWIST TO · M22 Male Connector **OPERATE** SEE COMPATIBLE · Easy grip handle **FITTINGS ON PG.85** M22 CONNECTOR **18FT TELESCOPIC WAND JEFWASHTELWAN** INCLUDES BELT · High-flow trigger gun · 3/8" QD coupling · Max Pressure: 3000psi PRICE EX.VAT · Aluminium telescopic poles · Connections: 3/8" QD Inlet, 1/4" QD Tip · Steel braided hose · Max Temperature: 60°C/140°F 18FT TELESCOPIC WAND BELT

## **36" EXTENSION LANCE KIT**



The Jefferson 36" extension lance is suitable for petrol and electric pressure washers.


Made of durable nylon, the belt allows you to work more comfortably for longer time periods.

· Max. Pressure: 4000psi

**JEFWASHTELWANBT** 

· The kit also includes: 6" 30° offset end piece & quick connection kit






## 1/4" QUICK RELEASE PIVOTING WAND (28" LONG)

## JEFWASHPVWAN

Designed for use with pressure washers and offers versatile performance with 3 different cleaning angles for hard to reach areas. Adjusts through 90° for 3 different cleaning angles.

· Max. Pressure: 4000psi

- · M22 3/8" female fitting
- · Suitable with all 3/8" male QR nozzles



**NOZZLE HEAD ROTATES** 



PRICE EX.VAT

# PRESSURE WASHER FITTINGS

# 3/8" FEMALE QD + M22 MALE ADAPTOR

## JEFWASHFITT01

- For use on hose and pumpConverts the M22 female
- Converts the M22 femal thread to a 3/8" quick connector coupling



PRICE EX.VAT

# M22 SWIVEL + 3/8" MALE PLUG ADAPTOR

## JEFWASHFITT02

- · For use on gun, hose and pump
- Converts the M22 male thread to a 3/8" quick release connector



PRICE EX.VAT

## 3/8" MALE PLUG ADAPTOR

## +3/8" MALE

## JEFWASHFITT03

 For use on gun, hose or pump to convert the 3/8" pipe thread to a 3/8" quick release



PRICE EX.VAT

# 3/8" FEMALE QD + 3/8" MALE

## JEFWASHFITT04

- For use on gun, hose and pump
- Converts the 3/8" thread-on couplings to a 3/8" quick connector



PRICE EX.VAT

# 3/8" FEMALE QD + 3/8" FEMALE

## JEFWASHFITT05

- For use on gun, hose and pump
- · Converts the M22 QD to a M22 quick connector



PRICE EX.VAT

# 1/4" QUICK RELEASE FITTING

## JEFWASHFITT06

 For use on the Jefferson high pressure two piece lance gun and 36" long one piece lance (JEFWAS12-SP002)



PRICE EX.VAT

## 1/4" PLUG + 1/4" FEMALE

## JEFWASHFITT07

 1/4" male plug quick release to 1/4" female thread to convert to 1/4" quick release



PRICE EX.VAT

## 1/4" PLUG + 1/4" MALE

## JEFWASHFITT08

 1/4" male plug quick release to 1/4" male thread to convert to 1/4" quick release



PRICE EX.VAT

## 3/8" FEMALE QD + 1/4" MALE

## JEFWASHFITT09

 3/8" female quick release to 1/4" male thread



PRICE EX.VAT

# SEWER JETTING NOZZLE WITH 3/8" O/RELEASE PLUG

## JEFWASHSEWJN3-8

- Short with round head with 1 front & 6 rear jets @ 30°
- Ideal for general drain cleaning in tight turns & elbows
- · Max working pressure: 4000psi



PRICE EX.VAT

## **SUCTION BARREL VALVE**

## **JEFWASHSUCBV**

 Helps to discharge the air in the pump, enhancing the suction



PRICE EX.VAT

## **SEWER JETTING NOZZLE**

## JEFWASHSEWJN

Professional drain cleaning nozzle for industrial use. Steel bullet head with 1 forward facing jet and 6 rear facing 30 degree jets. Ideal for drain cleaning and tight turns in traps and elbows.



PRICE EX.VAT

# **WORK PLATFORMS**

- · Fixed height, portable, hop-up work platforms
- · Ideal for low-level access, painting, plastering, DIY or even washing the car
- Compact & robust design with large non-slip platform area
- · Broad sturdy base with non-slip rubber feet
- Fold-flat design for easy assembly, transportation & storage
- · Easy locking catch mechanism for safe use





**BS EN131-6** 



INDUSTRIAL

# 300MM WIDE 2 TREAD ALUMINIUM WORK PLATFORM

## JEFLADWP02-300

- · Platform Size: 300 x 600mm
- · Platform Height: 480mm
- · Max Static Load: 150kg
- · Max Duty Rating: 110kg
- · Safe Working Height: 2000mm
- · Weight: 4.6kg



INDUSTRIAL



# 600MM WIDE 2 TREAD ALUMINIUM WORK PLATFORM

## JEFLADWP02-600

- · Platform Size: 600 x 600mm
- Platform Height: 480mm
  Max Static Load: 150kg
- Max Duty Rating: 110kg
- · Safe Working Height: 2000mm
- · Weight: 6.8kg



# 300MM WIDE 2 TREAD FIBREGLASS WORK PLATFORM

## JEFLADWP02-300FG

- · Platform Size: 300 x 600mm
- · Platform Height: 480mm
- · Max Static Load: 150kg
- Max Duty Rating: 110kg
- · Safe Working Height: 2000mm
- · Weight: 5.2kg

# 30,000V INSULATION PRICE EX.VAT

# 600MM WIDE 2 TREAD FIBREGLASS WORK PLATFORM

## JEFLADWP02-600FG

- · Platform Size: 600 x 600mm
- · Platform Height: 470mm
- · Max Static Load: 150kg
- · Max Duty Rating: 110kg
- · Safe Working Height: 2000mm
- · Weight: 7.7kg



# PRODUCT SPOTLIGHT

# MULTI-PURPOSE FIBREGLASS TELESCOPIC LADDERS

- · Lightweight anti-corrosive fibreglass frame with strong double aluminium rivet construction
- · Advanced auto-locking technology locks securely and safely into multiple positions
- · Spring loaded J locks for quick and easy working height adjustment
- · Easily converts between Telescopic Ladder, Extension Ladder and Stairway Ladder
- · Anti-slip feet and rung threads
- · Smooth glide wheels to aid transportation
- EN 131 Class Duty Rating: 115kg / Maximum Load: 150kg



	Number of Treads	FEET WIDTH	TREAD HEIGHT	Section Width	CLOSED HEIGHT	OPEN HEIGHT A-FRAME	Extended Working Height	FULLY EXTENDED HEIGHT	FULLY EXTENDED WORKING HEIGHT	WEIGHT
1 JEFLADMPFG-04	4	700mm	280mm	330mm	1270mm	1210mm	1335mm	4140mm	3050mm	18kg
2 JEFLADMPFG-05	5	700mm	280mm	330mm	1550mm	1475mm	1870mm	5270mm	4190mm	21.5kg

DOUBLE FIBREGLASS RIVET CONSTRUCTION

9	
MAX	INDUSTRIAL
150KG	

PRODUCT	DESCRIPTION	PRICE EX. VAT
1 JEFLADMPFG-04	FG4 Fibreglass Multi-Purpose Ladder	
2 JEFLADMPFG-05	FG5 Fibreglass Multi-Purpose Ladder	

FOR EASE OF MOBILITY & ANTI-SLIP FEET FOR

# FIBREGLASS STEP LADDERS




# MULTI-PURPOSE TELESCOPIC LADDERS

- · Lightweight anti-corrosive aluminium frame with strong double aluminium rivet construction
- · Advanced auto-locking technology locks securely and safely into multiple positions
- · Spring loaded J locks for quick and easy working height adjustment
- · Easily converts between telescopic ladder, extension ladder, stairway ladder and trestle
- · Anti-slip feet and rung threads
- · Smooth glide wheels to aid transportation
- · EN 131 Class Duty Rating: 115kg / Maximum Load: 150kg



	Number of Treads	Feet Width	Tread Height	Section Width	Closed Height	Open Height A-Frame	Extended Working Height	Fully Extended Height	Fully Extended Working Height	Weight
JEFLADMPAS03	3	520mm	280mm	300mm	990mm	1480mm	1842mm	2940mm	1340mm	12.3kg
JEFLADMPAS04	4	580mm	280mm	300mm	1270mm	2015mm	2380mm	3999mm	1880mm	14.9kg
JEFLADMPAS05	5	660mm	280mm	300mm	1550mm	2520mm	2922mm	5094mm	2420mm	18.9kg
JEFLADMPAS06	6	725mm	280mm	300mm	1830mm	3034mm	3477mm	6162mm	2950mm	21.9kg



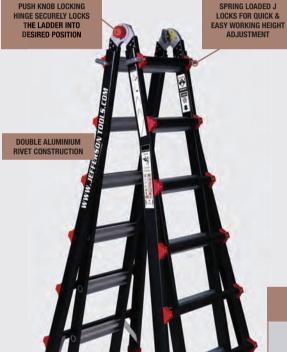



TRESTLE SYSTEM (PLATFORM NOT INCLUDED)

**FULLY EXTENDED LADDER** 





OF MOBILITY & ANTI-SLIP FEET FOR ADDED STABILITY

\*DOES NOT INCLUDE 3 TREAD

	TE	

PRODUCT	DESCRIPTION	PRICE Ex. Vat
JEFLADMPAS03	AS3 Multi-Purpose Ladder	
JEFLADMPAS04	AS4 Multi-Purpose Ladder	
JEFLADMPAS05	AS5 Multi-Purpose Ladder	
JEFLADMPAS06	AS6 Multi-Purpose Ladder	



# **TELESCOPIC LADDERS**

## 2.9M SAFE CLOSE TELESCOPIC LADDER

## JEFLADTEL10

- · Strong, lightweight and portable aluminium alloy telescopic frame
- · Equipped with a locking mechanism for enhanced safety and peace of mind while working
- · Wide-base top bar and bottom rung provide added stability and sturdiness
- · 10 x large slip resistant treads
- · Hand grips for extra security and stability while climbing
- · Anti-slip feet for added grip and durability
- · Comes with secure fastening storage
- · Closed height: 805mm
- · Opened height: 2.9m
- · Safe working height: 1.7m
- · Width: 476mm
- · Weight: 9.5kg





**COMPACT DESIGN** 







## 3.8M SAFE CLOSE TELESCOPIC LADDER WITH STABILISING BASE BAR

## JEFLADTEL13S

- · Strong, lightweight and portable aluminium alloy telescopic frame
- · Compact telescopic frame design for storing in confined spaces
- · Equipped with a locking mechanism for enhanced safety and peace of mind while
- · Wide-base top bar and bottom rung provides added stability and sturdiness
- · 13 x large slip resistant treads with stabilising base bar
- · Hand grips for extra security and stability while climbing
- · Anti-slip feet for added grip and durability
- · Comes with secure fastening storage strap
- · Closed height: 900mm
- · Opened height: 3.8m
- · Safe working height: 2.5m
- · Width: 855mm
- · Weight: 15.2kg





EN 131-6: 2019





# **LADDER ACCESSORIES**

## **ROOF RACK LADDER CLAMPS (PAIR)**

## JEFRAKCLP

- · Heavy duty steel clamps
- · Easy to attach
- · Sturdy, safe and secure
- · Padlock slots for enhanced security
- · Secures up to 3 ladders to a standard roof rack








# **SCAFFOLDING TOWERS**

## **T620-3T DOUBLE WIDTH SCAFFOLDING TOWER**

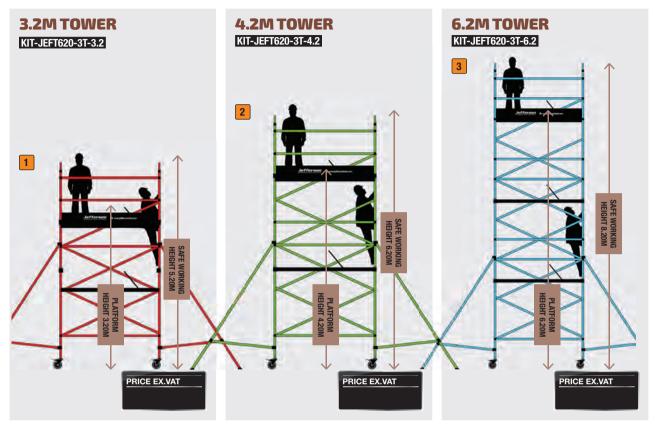

With a maximum platform height of 6.20m and a maximum working height of 8.20m, the Jefferson Double Width Scaffolding Tower is an ideal and safe solution when working at height. The complete tower has a safe working load of 950kg, including the weight of the tower (self weight of 244kg). Maximum load, evenly distributed, is 275kg per platform.

Platform Height Safe Working Height JEFFERSON DOUBLE WIDTH TOWERS ARE CERTIFIED TO THE FOLLOWING STANDARD BS EN1004 (CLASS 3)

## **TOWER COMPONENT PARTS**

For the list of components required to create your ideal double width tower, see the below table.

		950KG
3.2M	4.2M	6.2M
3.20m	4.20m	6.20m
5.20m	6.20m	8.20m

			1	2	3
PRODUCT	DESCRIPTION	PRICE Ex. Vat	3.2M QTY	4.2M QTY	6.2M QTY
JEFTWR6.2-CASTOR	T620-3T Castor Wheel 150mm		4	4	4
JEFTWR6.2-ADJLEG	T620-3T Adjustable Leg		4	4	4
JEFTWR6.2-LADD2R	T620-3T 2 Rung Ladder Frame 1450 x 1000mm		-	1	1
JEFTWR6.2-LADD4R	T620-3T 4 Rung Ladder Frame 1450 X 2000mm		2	2	3
JEFTWR6.2-SPAN2R	T620-3T 2 Rung Span Frame 1450 X 1000mm		-	1	1
JEFTWR6.2-SPAN4R	T620-3T 4 Rung Span Frame 1450 X 2000mm		2	2	3
JEFTWR6.2-PLATFX	T620-3T Fixed Platform 600 X 2500mm		1	1	1
JEFTWR6.2-PLATTR	T620-3T Trapdoor Platform 600 X 2500mm		2	2	3
JEFTWR6.2-BRACDI	T620-3T Diagonal Brace (Blue) 2610mm		5	7	11
JEFTWR6.2-BRACHO	T620-3T Horizontal Brace (Red) 2500mm		10	10	14
JEFTWR6.2-TOEBRD	T620-3T Toeboard Set		1	1	1
JEFTWR6.2-STABST	T620-3T Standard Stabiliser		4	4	4





## **T99 MINI TOWER PRO**

Flexible Mini Tower System offering a variety of indoor and outdoor access solutions. The T99 Tower can be customised and built into 4 different platform heights. This pick and mix facility means the T99 Mini Tower Pro can grow with your needs, with the ability to add additional packs and components as and when you need them.




830KG PER TOWER / 210KG PER PLATFORM EVENLY DISTRIBUTED



## **COMBINED BASE** & GUARDRAIL PACKAGE

## KIT-JEFT99-1.55

- · Safe Working Height: 3.55m
- · Platform Height: 1.55m
- · Width: 0.68m
- · Length: 1.55m
- · Horizontal Brace/s (1.55m)
- · Diagonal Brace/s (1.72m)
- · Frame Securing Pins
- · Net Weight: 57.0kg

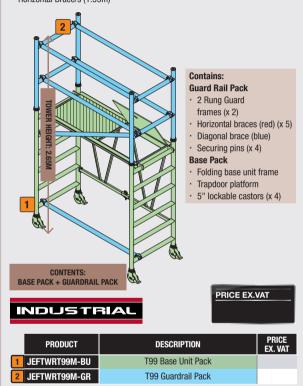

## **COMBINED EXTENSION** & STABILISER PACKAGE

## KIT-JEFT99-2.00

- · Platform Extension Height: 2m
- · Width: 0.68m
- · Length: 1.55m
- · Horizontal Brace/s (1.55m)
- · Diagonal Brace/s (1.72m)
- · Frame Securing Pins
- · Net Weight: 75.5kg





PRICE EX.VAT

PRODUCT	DESCRIPTION	PRICE EX. VAT
3 JEFTWRT99M-EX	T99 Extension Pack	
4 JEFTWRT99M-SS	T99 Standard Stabiliser (each)	
	$\checkmark$	


## **T99 MINI TOWER PRO COMPONENTS/PARTS**


	PRODUCT	DESCRIPTION	KIT-JEFT99-1.55	KIT-JEFT99-2.00	KIT-JEFT99-3.55	KIT-JEFT99-5.55	PRICE EX. VAT
1	JEFTWRT99M-BU	T99 Base Unit Pack	1	-	1	1	
2	JEFTWRT99M-GR	T99 Guardrail Pack	1	-	1	1	
3	JEFTWRT99M-EX	T99 Extension Pack	-	1	1	2	
4	JEFTWRT99M-SS	T99 Standard Stabiliser (each)	-	4	4	-	
5	JEFTWRT99M-TS	T99 Telescopic Stabiliser (each)	-	-	-	4	

## **OPTIONAL EXTRAS**

PRODUCT	DESCRIPTION	KIT-JEFT99-1.55	KIT-JEFT99-2.00	KIT-JEFT99-3.55	KIT-JEFT99-5.55	PRICE EX. VAT
JEFTWRT99M-TB	T99 Toe Board Set	-	-	-	-	
JEFTWRT99M-CF	T99 Fixed Castor Wheel	-	-	-	-	
JEFTWRT99M-CA	T99 Adjustable Castor Wheel	-	-	-	-	

JEFFERSON T99 MINI TOWERS ARE CERTIFIED TO THE FOLLOWING STANDARD BS EN1004:2004 (CLASS 3)

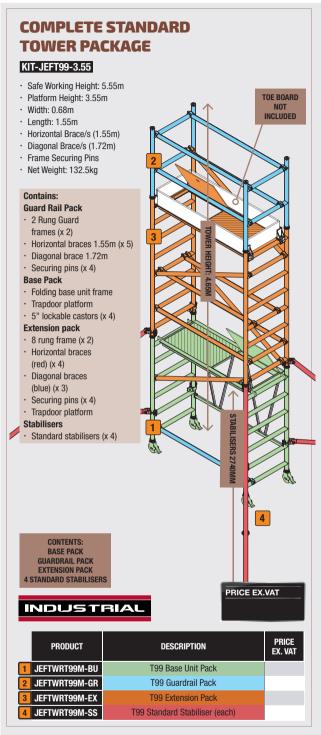

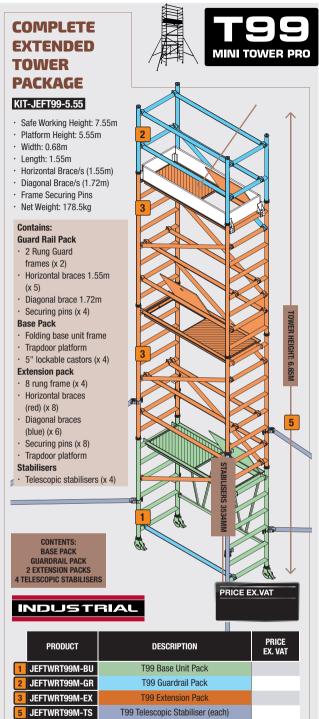

## **T99 MINI TOWER PRO SPARES**

PRODUCT	DESCRIPTION	KIT-JEFT99-1.55	KIT-JEFT99-2.00	KIT-JEFT99-3.55	KIT-JEFT99-5.55	PRICE Ex. Vat
JEFTWRT99M-P01	T99 Mini Tower Guardrail Frame	-	-	-	-	
JEFTWRT99M-P02	T99 Mini Tower Guardrail Frame Pin	-	-	-	-	
JEFTWRT99M-P03	T99 Mini Tower Horizontal Brace (Red)	-	-	-	-	
JEFTWRT99M-P04	T99 Mini Tower Diagonal Brace (Blue)	-	-	-	-	
JEFTWRT99M-P05	T99 Mini Tower Trapdoor Platform	-	-	-	-	
JEFTWRT99M-P06	T99 Mini Tower Extension 8 Rung Frame	-	-	-	-	

## NEMESIS RAPID LIFT TROLLEY JACK

The Nemesis range of trolley jacks allow for low-entry under sports and custom vehicles, and the protective handle sleeve helps prevent accidental damage to the vehicle on entry. Also includes a magnetic tray to store loose nuts and bolts. We also offer replacement saddle pads for the Nemesis range.



2

TONNE

3









RAPID LIFT

PFDAI

## **1 NEMESIS 2.25 TONNE RAPID LIFT TROLLEY JACK**

## JEFJKNEMRL0225

- Min. Height: 73mmMax. Height: 495mmHandle Length: 1140mm



## 2 NEMESIS 3 TONNE RAPID LIFT **TROLLEY JACK**

## JEFJKNEMRL03

- Lifting Capacity: 3 Tonne Min. Height: 85mm Max. Height: 470mm

- Dimensions: 712 x 392 x 176mmWeight: 32kg



## 3 NEMESIS 4 TONNE RAPID LIFT **TROLLEY JACK**

## JEFJKNEMRL04

- Lifting Capacity: 4 Tonne Min. Height: 100mm Max. Height: 533mm

- Handle Length: 1320mm



## **SADDLE PADS**

JEFJKNEMSP01

For JEFJKNEMRL0225



## JEFJKNEMSP02

For JEFJKNEMRL03



## JEFJKNEMSP03



## **NEMESIS AXLE STANDS (PAIR)**

The Nemesis range of axle stands are specifically designed for professional workshop environments. With a robust and durable design, they use a pin-through-hole design for optimal load support.



## **1** NEMESIS 3 TONNE AXLE STANDS (PAIR)

## JEFAXNEM03

- Min. Height: 295mm Max. Height: 438mm



## NEMESIS 6 TONNE AXLE STANDS (PAIR)

## JEFAXNEM06

PRICE EX. VAT



The new Nemesis range is a collection of robust and durable workshop equipment, specifically designed for heavy use in professional environments.

## **NEMESIS 2 - 3 TONNE RAPID LOW** PROFILE/HIGH LIFT FLOOR JACK

## JEFJKNEMRL02-3

- Low Profile

- Max. load: 2000kgMin. height: 98mmMax. height: 765mm

## S.U.V

- Max. load: 3000kgMin. height: 245mmMax. height: 770mm



LOW PROFILE

INDUSTRIAL

# 3-in-1: low entry, high-lift, & super high-lift Robust and durable trolley jack

- Low entry lifting range
- Handle Length: 1188mm
- Reinforced lifting arm

## NEMESIS 3 TONNE HIGH LIFT AXLE STAND (PAIR)

## JEFAXNEM03-HL

The Nemesis high lift axle stand are designed to effectively hold up to 3 tonne, making them ideal for working on SUVs. 8 adjustable positions allows for a super high lift.

- · Max Load: 3 Tonne
- Min Working Height: 440mmMax Working Height: 720mmNet Weight: 5.71kg



RICE EX. VAT

## **NEMESIS 48" 2 TONNE FARM JACK**

## JEFJKFMNEM48

- · 2 Tonne Capacity · Ideal for lifting, pulling, clamping & spreading
- · Heavy-duty steel
- · Adjustable lifting arm





- · Power-coated for rust resistance
- · Ratcheting design for controlled lift Adjustable design to any upright position

RICE EX. VAT

- Load Capacity: 4500kgMax. Lift Height: 1030mm
- · Min. Lift Height: 110mm
- · Max. Clamp Load: 340kg
- · Min. Lowering Load: 50kg



PRICE EX. VAT

## **NEMESIS 1.5 TONNE WHEEL DOLLY**

## JEFWHLDNEM015

Designed for effortless, fast and safe removal, handling and fitting of agricultural, industrial and commercial wheels, the Nemesis wheel dolly's lifting action is achieved by using a two-stage hydraulic pump, mounted inside the frame. The wheel is lifted on two tables of rollers, one mounted on each leg, while the hydraulic pump draws the legs together under the wheel so that the wheel is lifted by the rollers and a safety lock applied. The wheel is balanced securely using the integral wheel support before

- Lifting height: 0 770mm Min. Wheel Diameter: 1000mm

- Max. Wheel Diameter: 2200mm Max. Wheel Width: 1100mm Dimensions: 1980 x 1000 x 2140mm Weight: 125kg





PRICE EX. VAT



# TROLLEY JACKS

## **2 TONNE LOW PROFILE TROLLEY JACK**

## JEFJKFL02L

Compact and ideal to keep in your boot for when car-related emergencies strike. It can lift up to 2 tonnes and its range is from 85mm-375mm, making it suitable for low chassis or vehicles with reduced clearance.

- · Max Load: 2 Tonne
- · Min Height: 85mm
- · Max Height: 375mm
- · Length: 560mm
- · Weight: 13kg



## **3 TONNE TROLLEY JACK**

## JEFJKFL03

Long chassis, high capacity, portable garage jack for serious hobby or recovery vehicle use. Heavy duty pump bracket and one piece hydraulic unit with safety overload valve. Supplied with one piece pumping handle with rubber grip.



## TUNDRA 2.5 TONNE ALUMINIUM/ STEEL TROLLEY JACK

## TUNJKTRLROC2.5AL

Constructed from lightweight aluminium & steel for strength & durability. Low profile design with lightweight alloy load wheels. Twin-piston design for smooth & fast lifting action. Fitted with lifting bars on either side for easy transport. Rear swivel castors for easy manoeuvrability. Built-in safety valve prevents against overloading.



# 3 TONNE GARAGE JACK WITH COMPATIBLE RUBBER PAD & SPARES

## JEFJKGAR03

Heavy-duty steel construction provides stability and endurance. Swivel saddle and rear castors allows smooth manoeuvring. Hydraulic oil by-pass system protects ram from being over-extended. Twin pump mechanism for smooth & quick lifting. Built-in safety valve protects against jack over-loading.



## **TUNDRA 3 TONNE TROLLEY JACK**

## TUNJKSER03L

Manufactured from heavy-duty steel for strength and durability. Low profile lifting arm and extended access platform for use on low-slung vehicles. Twistable D-Handle for enhanced manoeuvrability & operation. Includes foam sleeve to protect vehicle body work. Twin pump mechanism provides quick lifting and smooth lowering. PU wheels and swivel rear castors ensure smooth, quiet operation and helps to prevent damage to garage floors. Includes "Quick-Start" foot pedal to allow quick approach of the lifting saddle to the contact point on the vehicle. Built-in safety valve prevents against overloading. Includes replaceable swivel rubber saddle.

· Max Load: 3 Tonne



# TUNDRA 4-5 TONNE FORKLIFT/TRACTOR JACK

## TUNJKFRK4-5

With scissor-action lift design, this Tundra forklift jack is suitable for low profile vehicles such as forklifts or tractors with a minimum lift of 64mm. Ideal for agricultural, industrial and automotive applications.



# TRANSMISSION JACKS

# TUNDRA TELESCOPIC HYDRAULIC TRANSMISSION JACKS

- Heavy-duty construction for durability and suitable for general workshop applications
- Two-way hydraulic unit ensures that the saddle lowers at a controlled speed at all times, even without load
- Spring-loaded dead man's safety release control reduces the risk of accidental lowering
- Compatible with Transmission Jack Saddle (adjustable gearbox supports)

# EXTRA LARGE CASTORS ALLOW FOR SMOOTH ROLLING OPERATION ON GARAGE FLOORS



# TRANSMISSION JACK SADDLE SPARES



IINDUSTRIAL

	PRODUCT	DESCRIPTION	MAX LOAD	MIN SADDLE HEIGHT	MAX SADDLE HEIGHT	CLAMP SADDLE	WEIGHT	PRICE EX. VAT
1 TU	NJKTRANO.6	Tundra Transmission Jack 600kg	600kg	1135mm	1980mm	75mm	34kg	
2 TUI	NJKTRAN1.5	Tundra Transmission Jack 1500kg	1500kg	1130mm	1915mm	75mm	55.6kg	
3 TUI	NSADO.6	Tundra Saddle For TUNJKTRAN0.6	Compatible with TUNJKTRAN0.6					
TU	NSAD1.5	Tundra Saddle For TUNJKTRAN1.5						

# **BOTTLE JACKS**

## **TUNDRA HEEL & TOE JACKS**

- · Hydraulic toe jack with multi-function head and toe lifting mechanisms
- · Quick, smooth effortless operation by hand
- · Lifting points on the toe and head allows for a versatile lifting
- · Ideal for lifting low weight points and working in confined spaces
- Toe constructed from strong mould casted alloy steel with no welded or bent parts to weaken the material
- · High strength return spring enables rapid ram retraction
- Swivelling pump handle assembly allows the operator to access and pump the unit from a variety of positions
- · Built-in safety valve prevents over-pressurisation
- · Internal overflow valve functions as a stroke
- · Convenient carry handle
- · Weight:
- · 28kg (TUNJKT0E10-20)
- · 43.4kg (TUNJKT0E15-30)







INDUSTRIAL

**20** Tonne 30 TONNE

PRODUCT	DESCRIPTION	LIFTING CAPACITY (TOE)	LIFTING CAPACITY (HEEL)	STROKE	CLOSED HEIGHT	JAW HEIGHT	PRICE EX. VAT
TUNJKTOE10-20	Tundra Heel & Toe Jack 10/20 Tonne	10 Tonne	20 Tonne	130mm	285mm	20mm	
TUNJKTOE15-30	Tundra Heel & Toe Jack 15/30 Tonne	15 Tonne	30 Tonne	140mm	305mm	20mm	

## **WELDED BOTTLE JACKS**

- Heavy duty welded bottle jacks fitted with overload valves and manufactured and tested to the latest CE standards
- Heat-treated extension screw allows low pickup height adjustment and maximum height with slow release on load
- Serrated, heat-treated saddle provides a generous lifting area, secure grip easy lifting and lowering operation
- Wide, welded base and oil reservoir, reinforced stress points for increased strength, stability and a reduced chance of leakage
- · Heavy-duty steel construction provides stability and safe operation
- High-quality, large diameter, hydraulic steel cylinder unit resulting in lower oil pressure needed to raise the load for reduced wear and tear
- Oil-powered hydraulics ensure corrosion resistance and high/low temperature flexibility.



2	3	5	10	15	20	32
TONNE						

PRODUCT	DESCRIPTION	CAPACITY	ADJ. RANGE	MIN HEIGHT	MAX HEIGHT	WEIGHT	PRICE Ex. Vat
JEFJKBTL02CW	2 Tonne Welded Bottle Jack *BMC	2 Tonne	48mm	168mm	316mm	2.1kg	
JEFJKBTL03W	3 Tonne Welded Bottle Jack	3 Tonne	60mm	188mm	363mm	2.8kg	
JEFJKBTL05CW	5 Tonne Welded Bottle Jack *BMC	5 Tonne	70mm	207mm	402mm	3.7kg	
JEFJKBTL10W	10 Tonne Welded Bottle Jack	10 Tonne	80mm	222mm	447mm	4.8kg	
JEFJKBTL15W	15 Tonne Welded Bottle Jack	15 Tonne	80mm	227mm	457mm	7kg	
JEFJKBTL20W	20 Tonne Welded Bottle Jack	20 Tonne	60mm	235mm	445mm	8.9kg	
JEFJKBTL32W	32 Tonne Welded Bottle Jack	32 Tonne	-	260mm	420mm	22.9kg	

## **TUNDRA HYDRAULIC BOTTLE JACKS**

## **10 TONNE LOW PROFILE**

## TUNJKBTL10L

- · Telescopic two-stage hydraulic ram allows for a higher maximum lift than a single stage jack, while maintaining the same compact closed heights
- · Low profile design for use on low-slung vehicles
- · Machine-welded base for increased strength
- · Double sealed oil reservoir for reduced risk of leakage
- · Anti-rust, nickel-plated ram piston · Max. Height: 225mm for smooth operation and long-life
- · Threaded pump assembly allows for easy maintenance
- Includes 4-section handle for variable leverage
- · Max. Load: 10 Tonne
- · Min. Height: 125mm
- · Weight: 7.7kg





PRICE EX.VAT



- · Welded, heavy-duty construction ensures leak-free operation and long use · Double sealed oil reservoir for reduced risk of leakage
- · Long, zinc-plated 3-piece handle allows quick and easy pumping & lifting
- · Built-in safety valve

- - · Anti-rust, nickel-plated ram piston for smooth operation and long-life
  - Carry-handle makes it easy to manoeuvre and transport

## **20 TONNE** TUNJKBTL20 · Max. Load: 20 Tonne · Min. Height: 241mm · Max. height: 525mm · Weight: 13.07kg SUPPLIED WITH EXTENDABLE MULTI-SECTION HANDLE FOR VARIABLE LEVERAGE PRICE EX.VAT INDUSTRIAL



# AXLE STANDS

## **AXLE STANDS (PAIR)**

- · Ratchet type axle stands
- · Heavy-duty steel frame construction
- · Cast-iron support post

SOLD IN PAIRS

**PRODUCT** 

JEFAXSTD02

JEFAXSTD03

JEFAXSTD06

JEFAXSTD12

- $\boldsymbol{\cdot}$  Sold as a pair and designed for use as a pair
- · Angled post teeth to prevent accidental load-release: the more weight applied, the tighter the post is locked

DESCRIPTION

2 Tonne Axle Stand (Pair)

3 Tonne Axle Stands (Pair)

6 Tonne Axle Stand (Pair)

12 Tonne Axle Stands (Pair)

## MAX HEIGHT WEIGHT HEIGHT 435mm 5kg 277mm 435mm 7kg 288mm 12 Tonne | 400mm 620mm 14.2kg 24 Tonne | 500mm 770mm 33.9kg

LOAD

4 Tonne

6 Tonne

## **TUNDRA AXLE STAND (PAIR)**

Sturdy welded steel construction for superior safety and strength, which helps prevent distortion and twisting. Large saddles for even load distribution. Supplied with captive pin load support.







**SOLD IN PAIRS** 

	PRODUCT	
1	TUNAXSTD07	
2	TUNAXSTD22	

22001111 11011
Tundra 7 Tonne Axle Stand (Pair)
Tundra 22 Tonne Axle Stand (Pair)

LOAD HEIGHT 14 Tonne | 267mm 44 Tonne | 338mm | 500mm

MAX HEIGHT 420mm | 14.6kg 28.8ka

WEIGHT

PRICE EX. VAT

CAPTIVE I OAD PIN



## **TUNDRA 10 TONNE AXLE STAND HIGH LIFT (PAIR)**

## TUNAXSTD10HL

10 Tonne high-lift axle stands designed to safely support vehicles for extended periods of time. Manufactured from a heavy-gauge welded steel frame to ensure superior strength and safety. Large saddles provide even load distribution. Includes captive, multi-position pin load support. Ideal for commercial garages, motor-factors and vehicle bodyshops etc.

Sold and designed for use in pairs.

- · Max Load (Pair): 20 Tonne
- · Min Height: 710mm
- · Max Height: 1208mm
- · Weight: 50.6kg





INDUSTRIAL



## **TUNDRA HIGH LEVEL VEHICLE** SUPPORT AXLE STANDS

- · Heavy-duty, welded-steel construction for enhanced strength. Safely supports a range of vehicles with adjustable height settings.
- · Includes three different interchangeable contact adapters for solid load distribution
- · Supplied with captive pin load support
- · Fitted with 3 spring-loaded, retractable castors for easy smooth-rolling operation

SUITABLE FOR COMMERCIAL AND PUBLIC SERVICE VEHICLES

## INDUSTRIAL

## TUNAXSTD07-HL

- · Max Load (Pair): 14 Tonne
- · Min Height:1295mm
- · Max Height:1905mm
- · Weight: 65kg

## TUNAXSTD12-HL

- · Max Load (Pair): 24 Tonne
- · Min Height: 1295mm
- · Max Height: 1905mm
- · Weight: 78kg







# LIFTING & MOVING

# **TUNDRA 680KG HYDRAULIC**

## TUNWHLD1500

- · Max Load: 680kg
- · Working Range: 340-620mm
- · Roller Length: 230mm
- · Max Tyre Width: 270mm
- · Min & Max Tyre Diameter: 450-660mm
- · Weight:18kg per unit
- · Designed for use in pairs



## **TUNDRA WHEEL SKATE RACK**

## TUNWHLDRK

The ideal storage solution for your Tundra wheel skates. Pack up to four wheel skates with this skate rack. Saves floor space through upright storage.

- · Capacity: 40kg
- · Weight: 3.3kg



INDUSTRIA

PRICE EX.VAT


## **TUNDRA 680KG ENGINE LOAD LEVELLER**

## TUNENGCRALEV

- 680kg lifting capacity provides enough power to level a variety of car, van, truck and marine engines
- · Supplied with 4x 275mm chains and 4x "L" shaped brackets
- · All-steel construction ensures strength and durability
- Worm drive-shaft rotates with a built-in swivel ball-bearing handle for easy load balancing & fine adjustments
- · Includes 3x adjustable chain holes to accommodate different engine sizes
- · Sling span 340mm







## **TUNDRA FOLDING ENGINE CRANES**

Heavy-duty steel construction ensures lasting performance and durability



- · 4-hole position boom and heavy-duty ram help provide reliable & safe lifting
- · Six heavy-duty swivel castors for smooth rolling mobility on garage floors
- · Foldable design allows for easy storage
- Supplied with chain and hook



	PRODUCT	DESCRIPTION	MIN HEIGHT	MAX HEIGHT	TOTAL WIDTH	TOTAL LENGTH	HANDLE LENGTH	WEIGHT	STROKE	PRICE Ex. Vat
1	TUNENGCRA1.0F	Tundra 1 Tonne Engine Crane	670mm	1170mm	1030mm	670mm	600mm	67kg	500mm	
2	TUNENGCRA2.0F	Tundra 2 Tonne Engine Crane	300mm	2300mm	1065mm	1760mm	600mm	99kg	1660mm	

# PIPE BENDERS

## TUNDRA HYDRAULIC PIPE BENDERS

The Tundra Industrial® hydraulic pipe benders are designed using the latest technologies, featuring low and fast speeds and equipped with a releasing device to prevent overloading. Constructed from refined drop forged steel, our pipe benders are of the highest quality, lightweight and portable, ideal for long periods of usage. Tundra® Industrial 2 tonne hydraulic pipe benders are ideal for the building/construction, engineering industries and an array of so many more.

## INDUSTRIAL

	TUNPIPEB13-250	TUNPIPEB20-290		
Tonnage Capacity:	13 Tonne	20 Tonne		
Stroke:	250mm	290mm		
Bending Range:	ø 21.3mm - ø 60mm	ø 21.3mm - ø 88.5mm		
Bending Forms:	1/2", 3/4", 1.0", 11/4", 11/2", 2.0"	1/2", 3/4", 1.0", 11/4", 11/2", 2.0", 21/2", 3.0"		
Pipe Wall Thickness:	2.75mm - 4.5mm	2.75mm - 5.0mm		
Gross Weight:	47kg	98kg		
Dimensions:	730 x 320 x 200mm	930 x 400 x 210mm		



# PORTA POWERS

## **TUNDRA 4 TONNE PORTA POWER** HYDRAULIC RODY FRAME REPAIR KIT

## TUNPORPOW04

Heavy gauge snap-together pipework and cast snap-together attachments compatible with most leading makes of snap-together equipment. Supplied with hand pump, hose, hydraulic ram and storage/carry-case.

- · Max Load: 4 Tonne
- · Max Height: 387mm
- · Min Height: 267mm
- · Weight: 16kg
- · Stroke: 120mm

## **INCLUDES 18 PIECES:**

- Hydraulic Hand Pump
- · Male Connector
- · 4 Tonne Ram (120mm stroke) · Flat Base
- · Jack Hose
- · 90° "V" Base
- · Spreader Ram
- · Wedge Head
- · 19.5" Extension Bar
- · Plunger Toe
- · 16.5" Extension Bar · 8.5" Extension Bar
- · Ram Toe · Flex Head
- 5" Extension Bar
- · Serrated Saddle
- · 3" Extension Bar
- · Blow Moulded Case



## **TUNDRA 10 TONNE PORTA POWER** HYDRAULIC RODY FRAME REPAIR KIT

## TUNPORPOW10-TP

Hydraulic repair kit, perfect for vehicle body and frame repair. Kit contains all heavy duty equipment needed for lifting, pushing pulling, bending, straightening & spreading. Features heavy gauge snap-together pipework and cast snap-together attachments compatible with most leading makes of snap-together equipment. Supplied with hand pump, hose, hydraulic ram and heavy duty wheeled storage/carry-case.

- · Maximum Load: 10 Tonne
- · Stroke: 130mm
- · Minimum Height: 332mm
- · Weight: 31kg

## **INCLUDES 17 PIECES:**

- · Hydraulic hand pump
- · 10 tonne ram
- · Flat base • 90° "V" base
- · Jack hose
- · Spreader ram
- · Wedge head · Plunger toe
- · 20.5" extension bar
- · Ram toe
- · 14" extension bar 10.5" extension har
- · Flex head
- · 4" extension bar
- · Serrated saddle
- · Male connector
- · Heavy duty wheel case



# **SHOP PRESSES**

## **TUNDRA 10 TONNE SHOP PRESS**





#### **TUNDRA 30 TONNE SHOP PRESS**

#### TUNSHPR30

- · H-frame 30 Tonne hydraulic shop press
- · Sliding ram mechanism with V-blocks
- · Floor mounting type with industrial grade hydraulic system
- · Fully-welded steel frame for maximum rigidity and strength
- · Manual hand pump offers more control for delicate applications
- · Mount type: Floor
- · Max Load: 30 Tonne
- · Ram Stroke: 152mm
- · Operating Range: 40-1050mm
- · Rack: 535mm
- · Weight: 164kg
- · Dimensions: 795 x 700 x 1801mm



#### **TUNDRA 50 TONNE SHOP PRESS**

#### TUNSHPR50

- · H-frame 50 Tonne air / hydraulic shop press
- · Sliding ram mechanism with V-blocks
- · Floor mounting type with industrial grade hydraulic system
- · Fully-welded steel frame for maximum rigidity and strength
- · Manual hand pump offers more control for delicate applications
- · Mount type: Floor
- · Max load: 50 tonne
- · Ram stroke: 200mm
- · Operating range: 69-1048mm
- · Rack: 730mm
- · Weight: 302.4kg
- Dimensions: 1030 x 800 x 1877mm







#### **TUNDRA 75 TONNE SHOP PRESS**

#### TUNSHPR75

- · H-frame 75 Tonne air / hydraulic shop press
- · Sliding ram mechanism with V-blocks
- · Floor mounting type with industrial grade hydraulic system
- · Fully-welded steel frame for maximum rigidity and strength
- · Manual hand pump offers more control for delicate applications
- · Mount type: Floor
- · Max Load: 75 Tonne



#### **TUNDRA 100 TONNE SHOP PRESS**

#### TUNSHPR100

- · H-frame 100 Tonne air / hydraulic shop press
- · Sliding ram mechanism with V-blocks
- · Floor mounting type with industrial grade hydraulic system
- · Fully-welded steel frame for maximum rigidity and strength
- · Manual hand pump offers more control for delicate applications
- · Mount type: Floor
- · Max Load: 100 Tonne
- · Ram Stroke: 300mm
- · Operating Range: 113-813mm
- · Rack: 787mm
- · Weight: 658kg
- · Dimensions: 1146 x 800 x 1925mm





#### **SHOP PRESS SAFETY GUARD**



PRODUCT	DESCRIPTION	PRICE Ex. Vat
TUNSHPR30-SG	Tundra 30 Tonne Shop Press Safety Guard	
TUNSHPR50-SG	Tundra 50 Tonne Shop Press Safety Guard	
TUNSHPR75-SG	Tundra 75 Tonne Shop Press Safety Guard	
TUNSHPR100-SG	Tundra 100 Tonne Shop Press Safety Guard	
TUNSHPKTUU-SU	Tuliula 100 Iolille Sliop Fless Salety dualu	

# HYDRAULIC PULLERS

#### **TUNDRA HYDRAULIC PULLERS**

High-quality forged Cr-V steel hydraulic puller set available in 5 Tonne, 10 Tonne, & 20 Tonne capacities. Designed to remove a wide-variety of pre-fitted parts including gears, bearings, bushings, pulleys, splitting hubs, flanges etc.

- · Heavy-duty forged steel jaws and cross-head
- · Precise and effortless control for safe pulling with 2 or 3 jaws
- · High-force hydraulic system
- · Spring-loaded live centering cone
- · Supplied in a robust and durable blow-moulded carry case
- · Ideal for automotive and agricultural mechanical applications













SUPPLIED IN ROBUST AND DURABLE BLOW-MOULDED CASE





PRODUCT	DESCRIPTION	OUTPUT FORCE	STROKE	SPREAD	MAX REACH	WEIGHT	PRICE EX. VAT
TUNHYDPUL05	Tundra 5 Tonne Hydraulic Puller	5 Tonne	50mm	50-200mm	140mm	7.6kg	
TUNHYDPUL10	Tundra 10 Tonne Hydraulic Puller	10 Tonne	60mm	50-250mm	170mm	10.1kg	
TUNHYDPUL20	Tundra 20 Tonne Hydraulic Puller	20 Tonne	70mm	100-350mm	205mm	18.6kg	

#### **10 TONNE 10 PIECE HYDRAULIC PULLER SET**

#### JEFHYDPUL10

#### **SET INCLUDES:**

- · 1 x Hydraulic bearing separator (Capacity: 75-105mm)
- · 1 x 10 Tonne hydraulic ram
- · 2 x 260mm pulling bolts
- · 2 x 260mm pulling bolt extensions
- · 3 x Ram extensions (31 mm, 50mm, 100mm)
- · 1 x 210mm Cross Beam



PRICE EX.VAT

#### **10 TONNE 23 PIECE HYDRAULIC PULLER SET**

#### JEFHYDPUL23

#### **SET INCLUDES:**

- · 1 x 10 Tonne Hydraulic ram
- · 3 x 100mm legs, 3 x 150mm leas. 3 x 200mm leas
- · 1x twin head for 2 leg puller
- · 1 x triple head for 3 leg puller · 2 x extensions rods
- (25 x 100mm & 25 x 50mm)
- · 4 x 200 x 1.75mm rods
- · 1 x beam separator (Capacity: 75-105mm)
- · 3 x ram extensions
- · 1 x 5/8 bolt



10 TONNE

# PRICE EX.VAT

#### **3 JAW GEAR PULLERS**

Suitable for gears, bearings and other press fit parts

PRODUCT	DESCRIPTION	PRICE EX. VAT
JEFTLRPUL3	3" 3 Jaw Gear Puller	
JEFTLRPUL4	4" 3 Jaw Gear Puller	
JEFTLRPUL6	6" 3 Jaw Gear Puller	



#### HYDRAULIC RAM

JEFHYDRAM02

10 tonne hydraulic ram available for individual purchase



10 TONNE

#### 12 PIECE RLIND BEARING PULLER SET


#### JEFBBPUL12

Medium stroke 1.5kg slide hammer with 395mm shaft and a screw-type bridge extractor. Includes bearing extractor collets with internal capacity from 8-34mm. Comes with protective blow moulded carry case.

- 1 Slide hammer
- 2 Collet 20-23mm + drive pin 13mm (long)
- 3 Collet 8-9.5mm + drive pin 10mm (short)
- 4 Collet 10-11.5mm + drive pin 10mm
- 5 Collet 12-13.5mm
- 6 Collet 15-16mm
- 7 Collet 17-18.5mm
- 8 Collet 25-27mm
- 9 Collet 30-32mm
- 10 Collet 32-34mm
- 11 Drive pin 13mm
- 12 Puller assembly





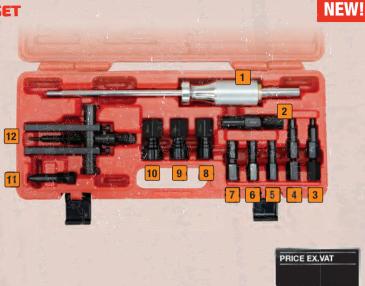

# WORKSHOP ESSENTIALS

#### **CIRCULAR MAGNETIC TRAY**

#### JEFMAGCTRY-C

- · Stainless steel
- · 1 x 80mm magnet
- · Anti-scratch PVC base
- · Dimensions: 150 x 150 x 25mm





#### RECTANGULAR MAGNETIC TRAY


#### JEFMAGCTRY-R

- · Stainless steel
- · 2 x 80mm magnets
- · Anti-scratch PVC base
- · Dimensions:









#### **MAGNETIC SPRAY CAN HOLDER TRAY**

#### **JEFMAGSPCTRY**

· Load Capacity: 3.6kg







PRICE EX.VAT

#### **MAGNETIC TELESCOPIC PICK UP TOOL**

#### JEFMAGTELPUT

- · 190-810mm telescopic reach
- · Comfortable cushion grip
- · LED torch function
- · Handy storage clip
- · 23.5N magnetic tip easily collects nut & screws
- · Holds up to 5lb weight
- · Supplied with 3x LR44 button cell batteries



#### **MAGNETIC SPRAY GUN HOLDER**

#### JEFMAGSPGNH

- · Magnetic base design to hold paint gun and other workshop accessories within convenient reach, without having to drill holes in your paint booth
- · Heavy duty steel hook with soft, protective rubber coating
- · Suitable for most gravity-fed spray guns & a wide range of other tools or accessories
- · Base diameter: 83mm
- · Overall length: 125mm
- · Magnetic force: 44N





#### **OIL FILTER STRAP WRENCH** 60-140MM

#### JEF0FSW02

- · Satin finish, drop-forged steel with hanging hole
- · Reinforced rubberised strap
- · Handle Length: 230mm
- · Strap Length: 570mm
- · Diameter: 60 140mm



#### **OIL FILTER STRAP WRENCH** 3/8" & 1/2" CAPACITY

#### JEF0FSW01

- · Satin finish cast steel body with 3/8" and 1/2" Sq. double drive
- · Tough and durable extra-wide nylon webbing strap
- · Designed for use with ratchet wrench, but may also be used with a 21mm spanner
- · Diameter: 300mm



Jefferson

SUPPLIED IN CARRY CASE

#### **1000W INDUCTION HEATER**

#### JEFHTIND1000

- · Mobile induction heater for fast heat delivery
- · Install appropriate coil and place over or around ferrous metal
- · Ideal for loosening stubborn and seized fixings
- · Supplied with pad coil for plastic trim/sticker removal
- · Induction element delivers high heat fast and effectively
- · Supplied in carry-case
- · Supply: 230V
- · Frequency: 50/60Hz
- · Power: 1000W

· Duty Cycle: 2 min ON / 5 mins OFF





#### 5 PIECE INDUCTION **HEATER COIL SET**

#### JEFHTINDSET05

Set of induction elements compatible with JEF-HTIND1000



#### **EXTENDABLE 1/2" WHEEL NUT WRENCH SET**

#### JEFEWNWS04

- · Heavy-duty extendable wheel nut wrench
- · Supplied with two 1/2" square drive reversible sockets: 17 x 19mm and 21 x 23mm (CR-V)
- · Manufactured from chrome vanadium steel to DIN 3120 standard
- · Wrench shaft can be extended from 370mm to 520mm in length for enhanced torque
- · Quick-release mechanism allows easy control of wrench length
- · & torque
- · Fitted with a soft-grip handle and quick-release extension mechanism
- · Supplied with durable storage bag with hanging hole







# WORKSHOP STOOL WITH SWIVEL SEAT

#### JEFWST01

Four legged heavy-duty steel construction with polished chrome plate finish for corrosion resistance. Two strengthening rings for stability, with lower ring acting as a foot rest.

Height: 725mm Diameter: 475mm



**NEW!** 

# PNEUMATIC WORKSHOP STOOL WITH ADJUSTABLE HEIGHT.

#### **SWIVEL SEAT & BACK REST**

#### JEFWST02

Four legged heavy-duty steel construction with polished chrome plate finish for corrosion resistance. Two strengthening rings for stability, with lower ring acting as a foot rest. Features pneumatic height adjustment, Ø350mm padded swivel seat and padded back rest for comfort and ease when turning to and from point of work.

Height: 855mm Height (inc. back): 1084mm Diameter: 500mm



**NEW!** 

#### GAS SPRUNG MECHANICS SEAT

#### JEFCARST02A

Swivel-action seat with lever operated gas-sprung height adjustment between 380mm and 500mm. Padded heavy-duty vinyl cushion for comfort & easy cleaning. Supplied with Ø60mm smooth-rolling bearing castors. With built-in tool and equipment storage tray. 120mm lifting range & 360° seat rotation

- · Adjustment Range: 120mm
- · Minimum Height: 380mm
- · Maximum Height: 500mm



#### **MECHANICS SEAT**

#### JEFCARST01F

Robust steel frame with a high-density foam & easy-clean vinyl padded seat offers comfort & durable performance. Supplied with built-in, easy-access, 3-compartment storage tray to hold tools, equipment and small parts. All-steel construction with heavy-duty supports for strength. Four swivel castors for 360° manoeuvrability.



#### **PARTS WASHER**

#### **JEFPTSWASH**

- · 20 gallon capacity
- · Fluid is recirculated internally
- 100W electric motor
- All steel construction
- · Comes with removable work shelf
- · Flexible nozzle for directing water flow



#### **LOW PROFILE CREEPER**

#### JEFCARCRP-C40

Composite garage creeper - manufactured with impact resistant and durable PVC body. Oil and solvent resistant, easy to clean. Includes two integral easy reach tool trays. Body-moulded ergonomic design with padded headrest for comfortable working. Low profile design allows greater clearance on lower vehicles undercarriages.

Six smooth-rolling swivel castors for easy manoeuvrability.

- · Length: 40" / 1016mm
- Capacity: 120kg / 265lb
- · Weight: 5kg





PRICE EX.VAT

#### **INDUSTRIAL PADDED VINYL CAR CREEPER**

#### JEFCARCRP-S40

Steel tube frame with powder-coated finished to prevent rusting. Designed with shoulder-drop and padded head rest for increased comfort when working. Fully padded heavy-duty vinyl covering - easily cleaned after use. Low profile design allows greater clearance on lower vehicle undercarriages. Six smooth-rolling swivel castors for easy manoeuvrability

- · Length: 40" / 1016mm
- · Capacity: 120kg / 265lb
- · Weight: 6.7kg





# **HEADLAMPS**

#### 350 LUMENS COB + 90 LUMENS LED HEADLAMP

#### JEFTRCH26

- · Brightness: 5W / 350Lumens
- · Lighting Capacity: 230° / 150ft
- · Max. Run Time:
  - 8 hours (LED Low)
  - 6 hours (LED High)
  - 3.5 hours (COB Low)
  - 2.5 hours (COB High)









- · Lighting Modes:
  - 1. 350 Lumens COB (High)
- 2. 150 Lumens COB (Low)
- 3. 90 Lumens LED (High)
- 4. 35 Lumens LED (Low)
- 5. LED Flash / SOS
- · Max. Charge Time: 2.5 hours
- · Impact Protection: 2m
- Battery: USB (Type C) Rechargeable 3.7V 1200 mAh polymer lithium





#### **160 LUMENS RECHARGEABLE HEADLAMP**

#### JEFTRCH15HD

- · 3 x Function including; High, low and strobe
- · Recharges using standard USB port
- · 750mAh rechargeable battery included
- · Weight: 63g with battery
- · Dimensions: 65 x 42 x 26.5mm
- · Beam range: 18m
- · Max. Run Time: 7 hours
- · Max. Charge Time: 3.5 hours













#### **200 LUMENS RECHARGEABLE HEADLAMP WITH MOTION SENSOR**

#### JEFTRCH14HD

- · ON/OFF hand motion sensor
- · 1500mAh rechargeable battery included
- · Includes USB charging cable & AC/DC adaptor
- · Tri-band one size fits all with adjustable straps
- · Weight: 146g with battery
- · Dimensions: 70 x 50 x 70mm
- · Beam range: 138m
- · Max. Run Time: 9 hours
- · Max. Charge Time: 3.5 hours















#### 580 LUMENS RECHARGEABLE UNI-POWERED CREE LED HEADLAMP

#### JEFTRCH19HD

- · Runs on either Li-Polymer rechargeable battery pack (included) or 3x AAA size alkaline batteries (not included)
- · Adjustable lens allows the user to focus with a spot or flood beam
- · 5 Lighting Modes (White) High, Medium and Low; (Red) On, flashing
- USB charging port with LED indicator on the battery pack
- · Weight: 95g
- · IP64 Dust proof and water resistant
- · Cree LEDs
- · 2m Impact Resistance
- · Beam range: 150m
- · Max. Run Time: 2.5 hours
- · Max. Charge Time: 2.5 hours



















# **SPOTLIGHTS**

#### **850 LUMENS RECHARGEABLE CREE LED SPOTLIGHT**

#### JEFTRCH10SP

- · Powerful optical TIR lens with CREE LED 850 lumens
- · 4 output modes:
- 1. High
- 2. Normal
- 3. Eco
- 4. Strobe
- · Twist zoom control for easy beam adjustment
- · 2 x 3.7V / 2700mAh rechargeable Li-ion batteries
- · 230V AC mains charger & 12V DC charger, and USB charging cable
- · Max. Run Time: 7 hours











#### **DUAL COB LED SPOTLIGHT WITH FLOODLIGHT FUNCTION**

#### JEFTRCH31

- · COB LED bulb
- · Multi directional floodlight rotates 220 degrees
- · IPX4
- · Power bank function, output 5V1A
- · Includes type-C cable & shoulder belt
- · 5 working modes: Spotlight:

Low: 200 Lumens

High: 600 Lumens

Floodlight:

Low: 400 Lumens

High: 1000 Lumens Red Light: 10 Lumens · Max. Run Time: Spotlight:

Low: 25 hours

High: 4.5 hours

Floodlight:

Low: 15 hours

High: 8 hours Red Light: 40 hours

· Max. Charge Time: 6 hours

· Beam Distance: Spotlight 380m

Floodlight 40m

- · Battery: 3.65V 8000mAh
- · Dimensions: 213 x 106 x 132mm
- · Weight: 0.7kg
















#### JEFTRCH30

- · COB LED bulb
- · IP Rating: IP67
- · Battery: 7.4V 5000mAh lithium battery
- · Power bank function
- · Low battery warning function
- · Max. Run Time: 12 hours
- · Max. Charge Time: 6 hours
- · Includes Type-C charging cable and lanyard
- · Dimensions: 68 x 42 x 295mm
- · Weight: 0.9kg



	LUMENS	BEAM DISTANCE	RUN TIME
TURB0	12000	20m	30s
HIGH	7000	35m	2hrs
MEDIUM	3000	45m	3hrs
LOW	300	-	12hrs













# WORKLIGHTS

#### **360 LUMENS RECHARGEABLE LED NECK LIGHT**

#### JEFTRCH28

- · Over charge and over discharge protection
- · Dimming function
- · Strong magnet on back
- · Includes 2 lighting modes: High - 360 Lumens / Low - 180 Lumens
- · Run time: High 3 hours / Low 6 hours
- · Battery: 3.7V Li-ion, 2200 mAh
- · Charge time: 3~4 hours
- · Type-C charging port
- · Product Dimensions:
















#### **300 LUMENS RECHARGEABLE MINI COB LED WORK LIGHT**

#### JEFTRCH32

- · Modern power COB LED
- · Neutral white light 4200k
- · Includes 2 lighting modes: High 300 Lumens / Low 100 Lumens
- · Fully Rechargeable
- · Battery Indicator
- · USB Type-C to USB charging cable (Included)
- · Belt / pocket clip
- · Anodized aircraft-grade aluminum
- · Water and impact resistant
- · Powerful magnetic base
- · Product Dimensions: 89 x 21 x 12mm













#### **QL3-R 500 LUMENS RECHARGEABLE LED TORCH**

#### JEFTRCH23

- · Multi-function 5W COB LED torch
- · Includes 3 lighting modes:
- 1. 5W COB Main Light 100% 500 Lumens
- 2. 5W COB Main Light 50% 250 Lumens
- 3. Red Flash SOS / Emergency Light
- · Tough, anodized aluminum body
- · Recessed LED housing with rubber grip handle
- · 500 Lumens strong light output
- · Powerful magnetic base
- · Rechargeable 2200mAh 3.7V battery
- · USB cable & docking station charging options
- · Max. Run Time: 5 hours
- · Max. Charge Time: 4 hours





#### **360 LUMENS RECHARGEABLE BLADE** LIGHT

#### JEFTRCH25

- · Powerful high quality COB LED
- · Compact, lightweight design for easy portability
- · Durable ABS thermoplastic & aluminium housing
- · 2 magnetic strips and hanging hook for hands free operation
- · IPX4 water resistant
- · Three working modes:
- Worklight low = 8 hours runtime Worklight high = 3.5 hours runtime Flashlight on/off
- · Power indicator light
- · Supplied with Micro-USB recharging cable, AC & DC adaptor
- · Max. Run Time: 8 hours
- · Max. Charge Time: 4 hours



























3W LED DIRECTIONAL TORCH

800 LUMENS (10W) COB

LED INSPECTION LAMP

STRONG MAGNETIC PLATES

ON REAR AND BASE

#### **800 LUMENS COB LED WORK LIGHTS**

- · Available in orange, grey and green
- · High quality 10W (800Lumens) COB LED inspection lamp with 3W LED directional torch
- · USB rechargeable li-ion battery
- · Strong magnetic plates on the rear of the housing and base allow for hands-free operation
- · Swivel and tilt functionality allows the lamp to be rotated 360° and tilted through 90°
- · Heavy-duty, ergonomic housing
- · Superior quality, efficiency and light density compared with other standard LED technologies
- · Luminosity: 10W COB LED Lamp: 800 Lumens (High) / 400 Lumens (Low) 3W LED Torch: 160 Lumens
- · Max. Run Time: 2 Hours (High) / 4 Hours (Low) / 3W LED Torch: 7 Hours
- · Max. Charge Time: 4 Hours
- · Impact Rating: IK10
- · Ingress Protection: IP65
- · Battery: Li-ion 18650 3.7V 4000mAh
- · Weight: 0.495kg
- · Dimensions: 51 x 49 x 241mm





IMPACT RATING: IK10

INGRESS

PROTECTION: IP65

SWIVEL AND THE

FUNCTIONALITY















#### **300 LUMENS 3-IN-1 INTERCHANGEABLE** RECHARGEABLE LED LAMP & TORCH KIT

#### JEFTRCH22B

- · Innovative three-in-one interchangeable lamp and torch kit with a screw thread base for solid connection allows for changing between the flexible CREE LED extension torch, slimline COB LED inspection lamp (with 360° tilt function) and CREE LED directional torch
- · Magnetic base for hands free operation
- · Illuminated power indicator on the switch
- · Supplied in a presentation box with a high quality USB cable and AC mains charger







#### **800 LUMENS COB LED WORK LIGHT WITH CHARGING BASE**

#### JEFTRCH29

- · High quality 10W COB LED inspection lamp with 3W LED directional torch
- USB rechargeable li-ion battery with magnetic charging dock (Includes 1m Type-C cable)
- · Strong magnet on the base of the housing, allows for easy hands-free operation
- · 180° tilt allowing you adjust the angle of illumination
- · Heavy-duty, ergonomic housing with IK07 impact rating and IP65 ingress protection
- · 3 lighting modes: 10W COB - 880 Lumens (High); 440 Lumens (Low) 3W LED - 160 Lumens
- · Max. Run Time: 1.5hrs (High); 2.5hrs (Low); 4hrs (LED)
- · Max. Charge Time 2.5hrs
- · IP Rating: IP65
- · Product size: Light: 35 x 56 x 203mm Base: 84 x 118 x 75mm
- · Product weight: 0.410kg















1111

Jefferson

#### **500 & 700 LUMENS RECHARGEABLE COB LED INSPECTION LAMPS**

- Dual charging options using either the 230V AC mains charger or 12V DC car charger
- · Powered by a 3.7V 4000mAh Li-ion battery
- · Slimline body with folding hanging hook to allow for handsfree usage
- · Lightweight and robust polycarbonate and aluminium body for added durability and longevity







2.5H 2.5H











#### **1000 LUMENS COB LED RECHARGEABLE MULTI-FUNCTIONAL INSPECTION LAMP**

#### JEFTRCH24

- · Compact and lightweight for easy portability
- · Constructed from tough and durable ABS thermoplastic
- · 120° reflex angle for easy adjusting and enhanced functionality
- · Three working modes: High, Low, SOS On/Off Flash
- · Magnetic base allows for hands-free usage
- · Built-in Lithium-ion rechargeable battery · Battery life indicator light bar
- · Supplied with 1 metre USB recharging cable











- · Output: 10W
- · IP Rating: IP54
- · Beam angle: 60° / 120° angle
- · Battery: 3.7V 2.2Ah Li-ion / 4 x AA batteries
- · Max. Run Time: 3.5 hours
- · Max. Charge Time: 4.5 hours



PRICE EX.VAT

#### 1400 LUMENS COB LED RECHARGEABLE POCKET WORK LIGHT

#### JEFWLT15WP-230R

- · High quality 15W (1400 Lumens) COB LED Rechargeable Pocket Worklight
- · Durable ergonomic housing
- · Superior quality, efficiency and light density compared with other standard LED technologies
- · 3 lighting modes (High Normal ECO) to help you to provide the most efficient lighting source for your working environment











1400 Lumens - Full Power 700 Lumens - Normal

- 350 Lumens ECO
- · Charging Input: DC 5V 2A · Impact Rating: IK07
- · Ingress Protection: IP65
- · Battery: Li-lon 3.7V, 5200 mAh, 19.24Wh
- · Max. Run Time: Full Power Mode: 2.5 hours Normal Mode: 4 hours ECO Mode: 8 hours
- · Max. Charge Time: 4 hours





#### **600 LUMENS COB LED RECHARGEABLE WORK LIGHT**

#### JEFWLT10W-230RCH

- · Compact and lightweight for easy portability
- · Die-cast aluminium housing with tough and durable steel framed stand
- · Powerful foam covered magnets on base allows for hands-free usage
- · 300° reflex angle light with 360° swivel rotation base for enhanced functionality
- · Built-in Lithium-ion battery

- · Supplied with AC mains adaptor and DC in-car charger
- · Output: 10W
- · Beam angle: 120° angle
- · Battery: 7.4V 2.2Ah Li-ion
- · Max. Run Time: 2.5 hours · Max. Charge Time: 5 hours
- · IP Rating: IP65

















#### **COB LED RECHARGEABLE WORK LIGHTS**

- · Compact and lightweight for easy portability
- · Constructed from tough and durable ABS thermoplastic
- · 360° reflex angle for easy adjusting and enhanced functionality
- · Three working modes: High, Mid, SOS Flash
- · Built-in Lithium-ion rechargeable battery
- · Power indicator light
- · Supplied with 1 metre USB recharging cable
- · Beam angle: 60 / 120° angle
- · Battery: 3.7V 2.2Ah Li-ion battery
- Max. Run Time: 3 hours
- · Max. Charge Time: 4 hours
- · IP Rating: IP65













#### 700 LUMENS EPISTAR LED WORK LIGHT (110V) 10W

#### JEFWLT10W-110

- · Input Power: 10W / 30mil Epistar LED Chip
- · Luminosity: 700 Lumens
- · Cable Length: 1.8m · Plug: 16A
- · Ingress Protection: IP65











#### 5400 LUMENS PLASTERERS LED WORK LIGHT

#### JEFWLT54WPLA-110

- · Fitted with a 16A plug
- · IP44 insulation class and is suitable for indoor and outdoor use
- · Input Power: 54W
- · Input Voltage: 110V / 50Hz
- · Luminosity: 5400 Lumens
- · Light Angle: 360°
- · Colour Temp: 6500k
- · Overall Height: 1480mm
- · Light Casing Height:
- 1110mm
   Tripod Open / Closed: 280mm / 780mm
- · Weight: 3.2kg

#### Typical usage includes:

- Plastering
- Emergency lighting
- Painting
- · Car body workshops
- · Domestic DIY



#### 1400 LUMENS TELESCOPIC LED WORK LIGHTS

- · 30mil Epistar LED chip
- · 1400 Lumens strong light output per lamp
- · Input voltage range AC85-265V~50/60Hz
- · 5m cable length
- · Folding tripod, telescopic stand
- · 120° beam angle adjustment
- Aluminium diecast water resistant housing (IP65)



	PRODUCT	DESCRIPTION	LUMENS	POWER	PRICE EX. VAT
1	JEFWLT20WTEL-110	1400 Lumens Telescopic LED Work Light (110V)	1400	110V	
2	JEFWLT20WTEL-230	1400 Lumens Telescopic LED Work Light (230V)	1400	230V	

#### 10,800 LUMENS HIGH BAY LED LIGHT

#### JEFLGTHB-180W

- · Tough and protective die cast aluminium housing (IP65)
- · Efficient lighting system with 120° light diffuser
- · 5000K colour temperature with independent heat release
- · Ideal for factories, warehouses and garages
- · Power: 180W





- · Runtime: 50,000 hours
- · Sanded glass diffuser (anti-glare)
- · Dimensions: 470 x 470 x 275mm
- · Weight: 11.1kg



# DIESEL GENERATORS

#### **5.7KVA / 180A DIESEL WELDER GENERATOR**

INCLUDES 12V SETS OF CHARGING LEADS. EARTH LEAD & ELECTRODE LEAD

#### JEFGENDIEWEL180

- · 180Amp DC Welding Output
- · Engine: MacGen 10HP Diesel 3600rpm
- · Max. Output: 5.7kVA / 4.6kW
- · Rated Output: 4.2kW@230V / 1.8kW@110V
- · AC Output: 1x230V 32A / 1x110V 32A (Sockets)
- · DC Output: 12V / 8.3A
- · Weld Range: 2.5/3.2mm Electrode
- · Dry Weight: 110kg
- · Dimensions: 730 x 500 x 630mm
- · LCD Digital Display: Shows Voltage, Frequency & Hour Meter
- · AVR & electric start
- · 11.5 Litre tank



COMPLETE WITH EARTH

**LOW OIL ALERT** 













#### **6.3KVA / 5.0KW DIESEL GENERATOR**

#### JEFGENDIE50ELK

- · Engine: MacGen 10HP Diesel 3000rpm
- · Max. Output: 6.3kVA / 5.0kW
- · Rated Output: 5.6kVA / 4.5kW
- · AC Output: 1x230V 32A / 1x110V 32A (Sockets)
- · DC Output: 12V / 8.3A
- · Noise Level @ 7m (Full load): 85 dB(A)
- · Dry Weight: 113kg
- · Dimensions: 750 x 520 x 640mm
- · LCD Digital Display: shows voltage, frequency & hour meter
- · With AVR & electric start
- · Low oil shutdown
- · 12.5 Litre long run fuel tank
- · Up to 11 hours running time
- · With 12V set of charging leads













6.5L/h

4.8L/h

3.2L/h

#### **MINIGEN DIESEL GENERATORS**

- · Super silenced canopy with double bunded fuel tank available in single or three phase
- · Fuel Type: Diesel
- · Fuel Tank Capacity: 100L
- · 4 Cylinder
- · 1500rpm
- · Water cooled
- · Super silenced canopy, 65-70dB @ 7m
- · Low fuel consumption
- · Secure canopy with engine enclosed
- · Double bunded fuel tank
- · Extended runtime of 18 hours
- · Tank indicating fuel level
- · Automatic or manual operation
- · Deep sea controller
- · Battery charger
- · Water jacket heater
- · Optional automatic main failure panel





100% LOAD (PRIME POWER)

75% LOAD (PRIME POWER)

50% LOAD (PRIME POWER)

4.2L/h

3.2L/h

1.2L/h

5.2L/h

3.9L/h

2.6L/h





		_			'	
PRODUCT	DESCRIPTION	POWER OUTPUT	ENGINE	DIMENSIONS	WEIGHT	PRICE Ex. Vat
JEFMG15-1	15kVA / 12kW Diesel Generator (Single Phase)	15kVA / 12kW	MacGen 16HP 1500rpm	1605 x 1035 x 700mm	650kg	
JEFMG20-1	20kVA / 16kW Diesel Generator (Single Phase)	20kVA / 16kW	MacGen 21HP 1500rpm	1800 x 740 x 825mm	680kg	
JEFMG20-3	20kVA / 16kW Diesel Generator (Three Phase)	25kVA / 20kW	MacGen 26HP 1500rpm	1800 x 740 x 825mm	680kg	
JEFMG25-1	25kVA / 20kW Diesel Generator (Single Phase)	20kVA / 16kW	MacGen 21HP 1500rpm	1800 x 740 x 825mm	680kg	
JEFMG25-3	25kVA / 20kW Diesel Generator (Three Phase)	25kVA / 20kW	MacGen 26HP 1500rpm	1800 x 740 x 825mm	680kg	

**OR 2,000 HOURS** 

WHICHEVER COMES FIRST)

# PTO GENERATORS

#### **SINGLE PHASE PTO GENERATORS**

- · PTO generators are the perfect solution for portable power on or around a farm
- · All of our PTO generators come as standard with removable 3-point linkage & bolt-down slots for fixed operation
- · Frequency: 50Hz
- · Input Speed: 540rpm
- · Voltage: 230V
- · Socket Configuration: 1 x 125A / 1 x 32A
- · Power Factor (Cos): 1
- · Phase: Single

#### ALSO AVAILABLE IN THREE PHASE



PRODUCT	DESCRIPTION	STANDBY POWER	PRIME POWER	RATED OUTPUT	PRICE Ex. Vat
MTR030-1	30Kva Single Phase PTO Generator	33kVA	30kVA	30kW	
MTR040-1	40Kva Single Phase PTO Generator	44kVA	40kVA	40kW	
MTR045-1	45Kva Single Phase PTO Generator	49kVA	45kVA	45kW	

# PETROL GENERATORS

#### 2.8KVA PETROL GENERATOR

#### JEFGENPET22

- · Engine: MacGen 5.5HP Petrol
- · Max. Output: 2.8kVA / 2.2kW
- · Rated Output: 2.5kVA / 2.0kW
- AC Output: 1x230V 16A / 1x110V 16A (Sockets)
- · DC Output: 12V / 8.3A
- · Guaranteed Noise Level: 95 dB Lwa
- · Dry Weight: 39kg
- · Dimensions: 610 x 470 x 460mm
- · Start: AVR & recoil start
- · Fuel Tank: 15 Litre long run
- · Running Time: 13 hours













**INCLUDES 12V SETS** 



#### **3.8KVA PETROL GENERATOR**

#### JEFGENPET30

- · Engine: MacGen 7.0HP Petrol
- · Max. Output: 3.8kVA / 3.0kW
- · Rated Output: 3.3kVA / 2.6kW
- · AC Output: 1x230V 16A / 1x110V 16A (Sockets)
- DC Output: 12V / 8.3A
- · Guaranteed Noise Level: 96 dB Lwa
- · Dry Weight: 44.25kg
- · Dimensions: 620 x 480 x 470mm
- · Start: AVR & recoil start
- · Fuel Tank: 15 Litre long run
- · Running Time: 11 hours















OF CHARGING LEADS

LOW OIL ALERT



#### **3.8KVA PETROL GENERATOR (ELECTRIC START)**

#### JEFGENPET30EL

- · Engine: MacGen 7.0HP Petrol
- · Max. Output: 3.8kVA / 3.0kW
- · Rated Output: 3.3kVA / 2.6kW
- · AC Output: 1x230V 16A / 1x110V 16A (Sockets)
- · DC Output: 12V / 8.3A
- · Guaranteed Noise Level: 96 dB Lwa
- · Dry Weight: 55kg · Dimensions: 620 x 480 x 470mm
- · Start: AVR & electric start
- · Fuel Tank: 15 Litre long run
- · Running Time: 11 hours

















PRICE EX.VAT

#### **4.4KVA PETROL GENERATOR (ELECTRIC START)**

#### JEFGENPET35EL

- · Engine: MacGen 7.5HP Stage V Petrol
- · Max. Output: 4.4kVA / 3.5kW
- · Rated Output: 4.0kW / 3.2KW
- · AC Output: 1x230V 16A / 1x110V 16A (Sockets)
- · DC Output: 12V / 8.3A
- · Guaranteed Noise Level 97dB LWA
- · Dry Weight: 57.5kg
- Dimensions: 620 x 510 x 490mm
- · Start: AVR & electric start
- · Fuel Tank: 15 Litre long run
- · Running Time: 8 Hours







## *<b>QLYMPUS*











#### **6.9KVA PETROL GENERATOR (ELECTRIC START)**

#### JEFGENPET55EL

- · Engine: MacGen 13.0HP Petrol
- · Max. Output: 6.9kVA / 5.5kW
- · Rated Output: 6.3kVA / 5.0kW
- · AC Output: 1x230V 32A / 1x110V 32A (Sockets)
- · DC Output: 12V / 8.3A
- · Guaranteed Noise Level: 97 dB Lwa
- · Dry Weight: 73kg
- · Dimensions: 720 x 560 x 590mm
- · Start: AVR & electric start
- · Fuel Tank: 25 Litre long run
- · Running Time: 10 hours
- · LCD Digital Display Shows Voltage, Frequency & Hour Meter



LOW OIL ALERT

Jefferson







# **OLYMPUS**















OF CHARGING LEADS

#### JEFGENPET63EL

- · Engine: MacGen 14.0HP Petrol
- · Max. Output: 7.9kVA / 6.3kW
- · Rated Output: 7.2kVA / 5.8kW
- · AC Output: 1x230V 32A / 1x110V 32A (Sockets)
- · DC Output: 12V / 8.3A
- · Guaranteed Noise Level: 97 dB Lwa
- · Dry Weight: 77kg
- · Dimensions: 720 x 560 x 590mm · Start: AVR & electric start
- · Fuel Tank: 25 Litre long run
- · Running Time: 10 hours







# **QLYMPUS**










7.9 6.3 — — POWERED BY — MACGEN

# PLUGS & SOCKETS



PRODUCT	DESCRIPTION	PRICE EX. VAT
JEFELPLG-11016	110V 16A Plug	
1 JEFELPLG-11032	110V 32A Plug	
JEFELPLG-23016	230V 16A Plug	
2 JEFELPLG-23032	230V 32A Plug	
JEFELPLGWM-23016	230V 16A Wall Mounted Plug	
JEFELPLGWM-23032	230V 32A Wall Mounted Plug	



PRODUCT	DESCRIPTION	PRICE EX. VAT
JEFELSOC-11016	110V 16A Socket	
1 JEFELSOC-11032	110V 32A Socket	
JEFELS0C-23016	230V 16A Socket	
2 JEFELSOC-23032	230V 32A Socket	
JEFELSOCWM-23016	230V 16A Wall Mounted Socket	
3 JEFELSOCWM-23032	230V 32A Wall Mounted Socket	













# WER LEADS & REELS



DON'T BE FOOLED BY CHEAPER CABLE REELS! CCA (COPPER COATED ALUMINIUM) IS USED IN CHEAPER ALTERNATIVES! OUR CABLE REELS ARE GUARANTEED 2.5MM CORE COPPER WIRE, ENSURING MAXIMUM STABILITY IN ELECTRICAL FLOW.

#### **14M THROW LEADS**





	PRODUCT	LENGTH	CORE	VOLTAGE	PRICE Ex. Vat
1	JEFELTHL-1101.5	14m	1.5mm	110V	
	JEFELTHL-1102.5	14m	2.5mm	110V	
2	JEFELTHL-2302.5	14m	2.5mm	230V	

#### **INDUSTRIAL CABLE REELS**

These Industrial Cable Reels feature an impact resistant spool for outstanding durability. With a thermal cutout fitted as standard you will never have to worry about the reel overheating, this in turn is added protection for your own tools that draw power from the reel.

- · Industrial aluminium frame for outstanding durability
- · Complete with handy cable clip for neat and tidy storage
- · Fitted with reel-lock screw to keep from unwinding
- · Fitted with thermal cutout as standard
- · Durable, easy to use winding handle
- · Easy grip handle
- · Insulation Class: IP44



**CABLE TYPE: PVC** 











	PRODUCT	DESCRIPTION	INPUT (AMPS)	CABLE LENGTH	NO. OF SOCKETS	CAPACITY WOUND	CAPACITY UNWOUND	PRICE Ex. Vat
1	JEFCRIN25-23016	25m 230V 16A Cable Reel	16A	25m	2	720W	3680W	
	JEFCRIN40-23016	40m 230V 16A Cable Reel	16A	40m	2	720W	3680W	

#### **PROFESSIONAL CABLE REELS**

Professional quality; these Jefferson cable reels are fitted with thermal cutout as standard, a comfort grip handle for easy transportation and come complete with a winding handle.

- · 100% copper guaranteed
- · Cable Section: 3x2.5mm2
- · Cable Type: PVC
- · Thermal Trip
- · Insulation Class: IP44













	PRODUCT	DESCRIPTION	INPUT (AMPS)	CABLE LENGTH	NO. OF SOCKETS	CAPACITY WOUND	CAPACITY UNWOUND	PRICE Ex. Vat
1	JEFCRPR25-110	25m 110V Cable Reel	16A	25m	2	660W	1760W	
	JEFCRPR40-110	40m 110V Cable Reel	16A	40m	2	660W	1760W	
2	JEFCRPR25-230	25m 230V Cable Reel	13A	25m	4	1200W	3120W	
	JEFCRPR40-230	40m 230V Cable Reel	13A	40m	4	1200W	3120W	



IP codes refer to the degree of protection against intrusion of solids or water in electrical enclosures. An IP44 rating indicates protection against most wires, screws, tools, fingers and water splashing against the enclosure from any direction.

#### **RETRACTING CABLE REELS**

- · Durable composite housing operated by simple pull and release action
- · Includes manual thermal trip switch to prevent overload
- · Supply: 230V 13A
- · Thermal Trip: Yes
- · Cable Length: 10m
- Protection Rating: IP20

PRODUCT

JEFCRRT101.0-230

JEFCRRT101.5-230



# **TRANSFORMERS**

#### **3.3KVA PORTABLE TRANSFORMER**

#### JEFKVA03.3

- · 2 x 16A Sockets
- · Max. Rating: 3.3kVA
- · Continuous: 1.65kVA
- · Resettable circuit breaker
- · Power-on indicator
- Complete with 1.5m cable and 13A plug





ALL JEFFERSON TRANSFORMERS ARE FITTED WITH A THERMAL OVERLOAD CUTOUT WHICH WILL AUTOMATICALLY SHUTDOWN/TRIP THE DEVICE WHEN OVERHEATING IS DETECTED.



#### **5.0KVA PORTABLE TRANSFORMER**

#### JEFKVA05.0

- · 2 x 16A Sockets
- · 1 x 32A Socket
- · Max. Rating: 5.0kVA
- · Continuous: 3.0kVA
- · Resettable circuit breaker
- · Power-on indicator
- Complete with 1.5m cable and 13A plug



ALL JEFFERSON TRANSFORMERS ARE FITTED WITH A THERMAL OVERLOAD CUTOUT WHICH WILL AUTOMATICALLY SHUTDOWN/TRIP THE DEVICE WHEN OVERHEATING IS DETECTED.



#### **10KVA SITE TRANSFORMERS**

Manufactured to the highest quality, the Jefferson 10kVA site transformer comes complete in a steel construction to make it robust and durable in tougher conditions. Ideal for more challenging environments, this Jefferson transformer is rated to IP22 standard and finished with 6 power outlets.

ALL JEFFERSON TRANSFORMERS ARE FITTED WITH A THERMAL OVERLOAD CUTOUT WHICH WILL AUTOMATICALLY SHUTDOWN/TRIP THE DEVICE WHEN OVERHEATING IS DETECTED.

	JEFKVA10.0-S	JEFKVA10.0-3P
INPUT:	230V ~ 50Hz - 32A	415V ~ 50Hz - 16A
OUTPUT VOLTAGE:	4x 110V C.T.E ~ 50Hz - 16A 2x 110V C.T.E ~ 50Hz - 32A	5x 110V C.T.E ~ 50Hz - 16A 1x 110V C.T.E ~ 50Hz - 32A
MAXIMUM Rating:	10kVA (5mins on 15mins off)	10kVA (5mins on 15mins off)
CONTINUOUS Rating:	7.0kVA	7.5kVA
POWER FACTOR:	0.93 Cos	0.93 Cos
IP RATING (Housing):	IP22	IP22
PHASE:	Single	Three



**SINGLE-PHASE** 

JEFKVA10.0-S



THREE-PHASE

JEFKVA10.0-3P



10.0 kVA -230V -3

# **BATTERY CARE**

#### **BOOSTER CABLES**

- · PVC sheathed copper coated aluminium cablesInsulated heavy duty clamps
- · 350A & 480A models supplied in handy zip storage bag
- · 1200A model supplied in protective storage case






	PRODUCT	DESCRIPTION	CABLE SECTION	CABLE LENGTH	CAPACITY	PRICE EX. VAT
1	JEFB0CAB25-3.5	25mm² 3.5m Booster Cable	25mm <sup>2</sup>	3.5m	350A	
	JEFB0CAB35-4.5	35mm <sup>2</sup> 4.5m Booster Cable	35mm <sup>2</sup>	4.5m	480A	
2	JEFB0CAB40-5.0	40mm <sup>2</sup> 5.0m Booster Cable	40mm <sup>2</sup>	5m	1200A	

#### **DYNAMO JUMP STARTERS**

- · Ideal for jump starting most vehicles
- Heavy-duty steel case, high power US manufactured battery and industrial quality switchgear make this model suitable for starting most vehicles
- Easy-to-read LED battery indicator to IEC 51 provides fast indication of battery's state of charge
- ${\boldsymbol \cdot}$  Surge and spike suppressing circuitry reduces risk of damaging vehicle's on-board electronics
- Fitted with charge balance circuitry to provide even charge to integral batteries
- · Supplied with mains voltage recharge unit



INDUSTRIAL



	JEFJMPSTA500	JEFJMPSTA1000
	DYNAMO JUMP STARTER 500	DYNAMO JUMP STARTER 1000
HORSE POWER	500HP	1000HP
VOLTAGE	12/24V	12/24V
CHARGER 230V	12 Volt 5 Amp	12 Volt 5 Amp
PEAK AMPS 12V	4400A	7000A
PEAK AMPS 24V	2200A	3500A
CRANKING CURRENT (20°C, 5 SECS) 12V	1700A	1900A
CRANKING CURRENT (20°C, 5 SECS) 24V	850A	950A
COLD CRANKING CURRENT (18°C, 5 SECS) 12V	700A	800A
COLD CRANKING CURRENT (18°C, 5 SECS) 24V	350A	400A
CABLE SECTION	35mm²	35mm²
CABLE & CLAMP LENGTH	2m	2m
WEIGHT	24kg	29kg



#### **DYNAMO JUMP STARTER 500**

JEFJMPSTA500



#### **DYNAMO JUMP STARTER 1000**

JEFJMPSTA1000



#### **DYNAMO 20A BATTERY CHARGER**

#### JEFBTRYCHG020

- · Input Power: 30W
- · Output Voltage: 12V / 24V
- · Output Charge Peak(EN): 20A (17A)
- · Input (Charge): 0.2A
- · Battery Capacity (Min Max): 60 250Ah
- Duty Cycle: 5 sec ON / 30 sec OFF @ 5 Cycles
- · Charging Rates: 2
- · Fast Charge Timer: No
- · Fuse: 1 x 20A / 1 x 5A
- · Ingress Protection Rating: IP21
- Charging cables: 2.5mm x 2m with fully insulated charging clamps
- · Power Cable: 3 x 1mm x 2m
- · Plua: 3A
- · Weight: 4.4kg
- · Dimensions: 235 x 195 x 190mm



#### **DYNAMO 30A BATTERY CHARGER**

SAFETY CLASS (DIN 40530): II

#### JEFBTRYCHG030

- · Input Power: 40W
- · Output Voltage: 12V / 24V
- · Output Charge Peak(EN): 30A (25A)
- · Input (Charge): 0.3A
- · Battery Capacity (Min Max): 3 320Ah
- Duty Cycle: 5 sec ON / 30 sec OFF @ 5 Cycles
- · Charging Rates: 2
- · Fast Charge Timer: No
- · Fuse: 1 x 30A / 1 x 5A
- · Ingress Protection Rating: IP21
- Charging cables: 2.5mm x 2m with fully insulated charging clamps
- · Power Cable: 3 x 1mm x 2m
- · Plug: 3A
- · Weight: 4.8kg
- · Dimensions: 235 x 195 x 190mm









#### **INVERTER BATTERY CHARGERS**

- · Temperature controlled
- Supplied with 1.7 metre DC and 0.5 metre battery clamp connectors
- · Max Rated Capacity: 2 400Ah (12V)
- · IP Rating: IP20

#### INPUT:

- · Voltage: 220-240V AC ~ 50Hz
- · Current: 2.5A

#### 12V (15A 300SEC BOOSTER) JEFBATCHG15-12

- Designed for charging all types of 12V lead-acid batteries including; Wet (Flooded), Gel, MF (Maintenance-Free), CA (Calcium), EFB (Enhanced Flooded Battery), and AGM (Absorption Glass Mat) batteries
- · Suitable for charging battery capacities from 2 to 400Ah and maintaining all battery sizes
- $\cdot\,$  15A booster enables a fast charge within 300 seconds
- · Power: Max. 320W

#### OUTPUT:

· Voltage: 12V DC

 Current: 12V DC - 2A / 6A / 10A / 15A or 12V DC - 15A (300 seconds boost charge)





#### 12-24V (20A 300SEC BOOSTER) JEFBATCHG15-1224

- Designed for charging all types of 12V and 24V lead-acid batteries including; Wet (Flooded), Gel, MF (Maintenance-Free), CA (Calcium), EFB (Enhanced Flooded Battery), and AGM (Absorption Glass Mat) batteries
- Suitable for charging battery capacities from 2 to 400Ah (12V), 50 to 400Ah (24V) and maintaining all battery sizes
- · 20A booster enables a fast charge within 300 seconds
- · Power: Max. 350W

#### OUTPUT:

· Voltage: 12V DC / 24V DC

· Current: 12V DC - 2A / 4A / 6A / 8A / 10A / 15A or

24V DC - 3.5A/7.5A or 12V DC - 20A (300 seconds boost charge)







#### **3.5A BATTERY CHARGER 6-12V**

#### JEFBATCHG3.5-612

- Suitable for charging all 6V and 12V lead-acid batteries including; Wet (Flooded), Gel, MF (Maintenance-Free), CA (Calcium), EFB (Enhanced Flooded Battery), and AGM (Absorption Glass Mat) batteries
- Suitable for charging battery capacities from 2 to 120 Ah and maintaining all battery sizes
- Stabilises internal battery chemistry for increased performance and longevity
- · Four external holes for easy mounting
- Supplied with 1.7 metre DC, 0.5 metre battery clamp and eyelet terminal
  - connector quick charge leads
- · Max Rated Capacity: 2 120Ah (12V)
- · Power: Max. 60W

#### INPUT:

- · Voltage: 220~240V AC 50Hz
- · Current: 0.8A

#### OUTPUT:

- · Voltage: 6V DC / 12V DC
- · Current: 3.5A / 1A/3.5A
- · Weight: 0.7kg
- · Dimensions: 190 x 79 x 42mm
- · IP Rating: IP54



#### **DYNAMO STARTER CHARGERS**

- Single phase battery / starter charger with sturdy plastic and steel housing and carry handle
- · 12/24V battery voltage
- · Well ventilated to help maintain low temperatures during operation
- · Large ammeter display showing rate of charge
- · Dash-mounted fuse and polarity protection
- · Variable charging rate
- Supplied with a pair of fully insulated positive and negative charging clamps which can be stored within the equipment casing



	JEFSTACHG230	JEFSTACHG430	JEFSTACHG630
	230A Starter Charger	430A Starter Charger	630A Starter Charger
INPUT VOLTAGE:	230V ~ 50Hz	230V ~ 50Hz	230V ~ 50Hz
INPUT POWER:	80W	130W	180W
OUTPUT VOLTAGE:	12V / 24V	12V / 24V	12V / 24V
OUTPUT CHARGE PEAK(EN):	30A (25A)	75A (30A)	90A (70A)
OUTPUT START PEAK(EN):	180A (120A)	400A (300A)	600A (350A)
INPUT (CHARGE):	0.4A	0.4A	0.5A
INPUT (START):	2A	3A	4A
DUTY CYCLE: @ 5 CYCLES	5 sec ON / 30 sec OFF	5 sec ON / 30 sec OFF	5 sec ON / 30 sec OFF
BATTERY Capacity:	20 - 350Ah	60 - 800Ah	80 - 1000Ah
FUSE:	1 x 50A	2 x 50A	3 x 50A
IP RATING:	IP21	IP21	IP21
SAFETY CLASS (DIN 40530):	II	II	II
POWER CABLE	3x 1.5mm x 2.4m	3x 1.5mm x 2.4m	3 x 1.5mm x 2.4m
PLUG	13A	13A	13A
CHARGE CABLES:	14mm x 2.0m	14mm x 2.0m	16mm x 2.0m
WEIGHT	12kg	15kg	20kg
DIMENSIONS	300 x 230 x 630mm	300 x 230 x 630mm	330 x 260 x 720mm

#### **230A STARTER CHARGER**

JEFSTACHG230



#### **430A STARTER CHARGER**

JEFSTACHG430



#### **630A STARTER CHARGER**

JEFSTACHG630



SAFETY CLASS (DIN 40530): II

# **MEASURING**

#### **5M MEASURING TAPE**

#### JEFTM050DB

- · Plastic body measuring tape with soft rubber grip for greater comfort, superior grip and ease of use
- · Auto return mechanism
- · Blade is marked with metric and imperial graduations
- · Blade Width: 19mm







**BEST** 

#### PROFESSIONAL NYLON COATED MEASURING TAPES



- · Manufactured, tested and certified in accordance with MID 2014/32/EU, UKCA compliant
- Rubber outer casing for comfort and added protection
- · Smooth-action system provides reliable hold and easy blade retraction
- Riveted hook for strength and durability
- Anti-corrosion nylon coated blade surface gives lasting performance and additional strength when tape is extended

7.	PRODUCT	DESCRIPTION	BLADE WIDTH	PRICE EX. VAT
1	JEFTM050NC-G	5m Professional Measuring Tape - Green	19mm	
	JEFTM080NC-G	8m Professional Measuring Tape - Green	25mm	
	JEFTM050NC	5m Professional Measuring Tape	19mm	
2	JEFTM080NC	8m Professional Measuring Tape	25mm	







#### **TUFFLOCK MEASURING TAPES**

The Jefferson TuffLock measuring tapes are unapologetically named, due to its sturdy construction and industrial magnetic blade tips, both of which give it the added reliability you need to complete those larger tasks.

- · Available in 5m. 8m. & 10m
- · Anti-corrosive nylon coated blade surface for long lasting performance and extra strength when tape is extended
- · Rubber outer casing for comfort and added protection
- · Smooth-action locking system provides reliable hold and easy blade retraction
- · MID / MIR tested and approved









### **50M / 165FT STEEL MEASURING TAPE**

#### JEFTM500ST

- · Blade Length: 50m
- · Blade Width: 12.5mm
- · Rubber moulded, impact-resistant & durable body
- · 3x Fast Retracting 50m Steel Blade
- · Class II Metric Scale
- · Complete with rubber hanging strap and fold away winding handle













#### **FIBREGLASS MEASURING TAPES**

- · Available in 30m, 50m & 100m
- · Plastic body measuring tapes with soft rubber grip for greater comfort and ease of use
- · Impact resistant and durable body
- · 3x Fast retracting centre wheel
- · Class III metric and imperial scale
- · Steel hook
- · Tape width: 13mm



PRODUCT	DESCRIPTION	PRICE EX. VAT
1 JEFTM300FG	30m / 100ft Fibreglass Measuring Tape	
2 JEFTM500FG	50m / 165ft Fibreglass Measuring Tape	
3 JEFTM1000FG	100m / 330ft Fibreglass Measuring Tape	











#### JEFDMWHL

- · Compact, easily folded and carried
- · Lightweight and durable design
- · Class III metric measuring scale with counter reading up to 9999.9m
- · Instant zero reset
- · Smooth running rubber wheels
- · Forward and reverse distance measuring
- · Suitable for building trade, contractors, agricultural, property planners and accident investigation
- · Wheel diameter: 318mm
- · Measures to (by cm): 9999.9m
- · Weight: 1.3 kg







#### STAINLESS STEEL RULERS

- · High quality stainless steel ruler with metric and imperial graduations
- · 100cm ruler width: 32mm
- · 30cm ruler width: 25mm
- · 15cm ruler width: 18mm







шшш	
METRIC	IMPERIAL

	PRODUCT	DESCRIPTION	PRICE EX. VAT
1	JEFRULESS015	15cm Stainless Steel Ruler	
2	JEFRULESS030	30cm Stainless Steel Ruler	
3	JEFRULESS100	100cm Stainless Steel Ruler	



#### **ADJUSTABLE QUICK SQUARES**

- · Flexible, adjustable carpentry/roofing tool
- · Designed for making repetitive marking and measurements
- · Suitable for use as a bevel, protractor or a saw guide
- · Durable aluminium construction
- · Lockable and adjustable angle setting arm
- · Double-sided design with metric and imperial marking and graduations
- · Ideal for marking out common rafter cuts including: COM / Jack Plumb cuts. HIP/VAL. Seat cuts
- · Quick and accurate marking and measurements







#### **400MM DIGITAL ANGLE RULE**

#### JEFDANGR200

- · Ideal for finding angles in tight spots, · Ruler length: 400mm helping you save time and improve accuracy with a lock angle feature
- · This precision digital finder with measuring rulers also includes a built-in reverse angle function for added versatility and convenience
- · Durable stainless-steel metric & imperial ruler it offers an easily visible display and measure a range
- · Length Range: 200mm / 7"
- · Angle Range: 0-360°
- · Resolution: 0.05°
- · Accuracy: ±0.3° · Repeatability: 0.05°
- · Battery Type: 3V CR2032
- · Battery Life: 1 year





#### **ENGINEERING SQUARES**

- · Hardened and tempered blades
- · Ground for straightness and accuracy
- · Supplied in durable cardboard box for easy storage and carrying



PRODUCT	DESCRIPTION	PRICE Ex. Vat
1 JEFESQ150	6" Engineering Square	
2 JEFESQ250	10" Engineering Square	
3 JEFESQ300	12" Engineering Square	

#### **INDUSTRIAL ENGINEERING SQUARES**



6" Steel Industrial Engineering Square	
9" Steel Industrial Engineering Square	
2" Steel Industrial Engineering Square	
	5" Steel Industrial Engineering Square 9" Steel Industrial Engineering Square 2" Steel Industrial Engineering Square

#### **VERNIER CALIPER**

#### JEFCALV150

- · Manufactured using tempered and hardened non-corrosive stainless steel to ensure longevity and durability
- · Strong mono block locking mechanism
- · Metric scale graduates in 0.02mm
- · Ranging between 0 150mm
- · Supplied in a storage case



PRICE EX.VAT



#### **DIGITAL VERNIER CALIPER**


#### JEFCALD150

- · Hardened, tempered stainless steel with satin finish
- · LCD easy-read display
- · Metric and Imperial scale with conversion function button
- · Zero reset button allows for comparative measurements
- · Supplied in storage case
- · Range / Capacity: 0-150mm / 0-6"
- · Resolution: 0.01mm / 0.0005"
- · Accuracy: ± 0.03mm/0.0015"
- · Repeatability: ± 0.01mm/0.0005"
- · Battery Type:
- 3V CR-2032 Lithium Button Cell
- · Measuring system: Linear capacitive







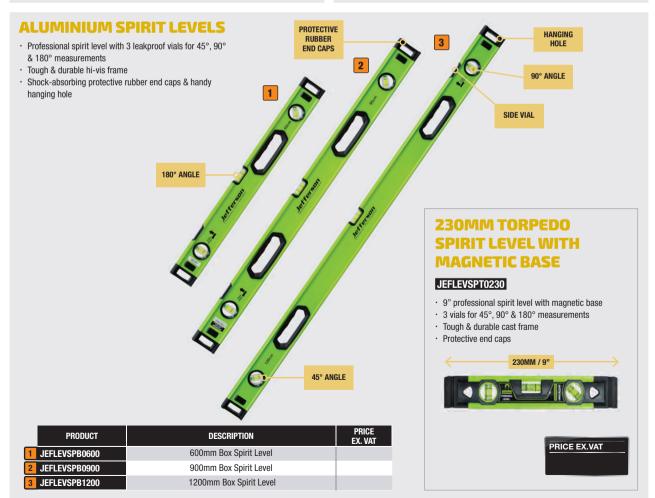

# **ELECTRONIC TESTING & ACCESSORIES**

#### **300V & 600V DIGITAL MULTIMETERS**

- · Data hold function & overload protection
- · Low battery indication
- · Continuity & diode testing
- · Resistance measurements: up to 2000K $\Omega$
- · Manufactured & tested to EN 61010
- Input Impedance: 1MΩ
- · Test Current: 1mA

#### JEFDMM300V

- · CAT III 300V Digital Multimeter
- · 3.5 digit LCD display (max. reading 1999)
- · Negative polarity indication
- · Battery testing: 1.5V / 9V / 12V
- · DC Voltage Range: 200m ~ 300V
- · DC Current Range: 2000µ ~ 10A
- · AC Voltage: 200 ~ 300V
- · Resistance: 200 ~ 2000kΩ
- · Continuity: <30Ω
- · Battery Testing 1.5V / 9V / 12V
- · Overload Protection: Both Fuses: ø5x20mm F1: Fuse, 250mA / 300V, Fast action F2: Fuse, 10A / 300V. Fast action
- · Dimensions: 138 x 74 x 32mm
- · Weight: 160g (inc. battery)





#### JEFDMM600V

- CAT III 600V Digital Multimeter
- · 3.5 digit backlit LCD display (max. reading 1999)
- Battery testing: 1.5V / 9V
- · DC Voltage Range: 200m ~ 600V
- · DC Current Range: 2000µ ~ 10A
- AC Voltage: 200 ~ 600V
- · Resistance: 200 ~ 2MΩ
- Continuity: <30Ω, >100Ω
- Battery Testing: 1.5V / 9V Overload Protection: Both Fuses: ø5x20mm F1: Fuse, 250mA / 600V, Fast action

F2: Fuse, 10A / 600V. Fast action Dimensions: 147 x 87 x 47mm

- Weight: 290g (inc.battery)



PRICE EX.VAT

#### CAT.III

#### INFRARED THERMOMETER

#### JEFINFTHER01

- · Safe, non-contact temperature measurements
- · Accurate readings in °C & °F temperature scales
- · Battery charge status indicator
- · Back-lit LCD display with data hold function
- · Temperature Range: -38 ~ 520°C -36.4 ~ 968°F
- · Laser: Class II
- · Max. Output: <1 mW
- · Accuracy (Tamb = 23 ± 3°C):  $\pm 2^{\circ}$ C /  $\pm 4^{\circ}$ F (or 2%)
- · Spectral Response: 7.5 13.5µm
- · Wave Length: 630 660nm
- · Resolution: 0.1°C / 0.1°F
- Response: 1s 95%
- · Distance : Spot 8:1
- · Battery: 2x 1.5 AAA · Dimensions:
- 160 x 118 x 40mm
- · Weight: 158g (inc. battery)

#### CLASS II



PRICE EX.VAT

#### **400A CLAMP METER**

#### JEFDCM400A

- · CAT III 300V Clamp Meter
- · Slim, ergonomic design with versatile clamp laws
- · Measures AC & DC Voltage up to 300V
- · AC Current Range: 20A 400A 50-60Hz
- · 200KΩ Resistance Range
- · 30Ω Continuity Range
- · Data Hold Function
- · LCD Display: 3 1/2 Digits (Max Reading 1999)
- · Sample Rate: 3 per second
- · Battery: 3x 3V CR2032
- · Low Battery Indicator: Yes
- · Jaw Capacity: 27mm
- · Operating Temperature Range: 0°C 40°C
- · Dimensions: 151 x 62 x 34mm
- · Weight: 127g (including batteries)

#### CAT.III

EN 61010 & EN 61326-1

MEASURING FUNCTIONS: AC VOLTAGE: 300V DC VOLTAGE: 300V **AC CURRENT: 400A** RESISITANCE: 200KΩ CONTINUITY: 300 DIODE



PRICE EX.VAT

#### **VOLTAGE TESTER**

#### **JEFVOLTST**

- · This unit is a non-contact AC voltage detector for detecting 5 - 1000V AC voltage
- · AC voltage detection LED
- · Durable ABS plastic resin casing and compact design
- · With pocket clip for convenient storage and access
- · Safe, efficient, quick and accurate testing
- · Variable sensitivity
- CAT.IV

- · LED torch for operation in low-light conditions
- · Suitable for detecting whether a cable, wire or socket contains AC voltage, or use it to locate breakpoint on a live line
- · Measurement Category: CAT IV (1000V)
- Frequency Range: 50Hz 400Hz
- · Battery: 2x 1.5V (AAA)
- Low Battery Indicator: Yes Operating Temperature Range: 0°C - 40°C
- · Dimensions: 154 x 32 x 28mm
- · Weight: 50g (including batteries)





# HEAVY DUTY AUTOMATIC WIRE STRIPPERS

#### JEFWIRES01

- · Strip and cut cable/wire
- · 24-10 AWG (0.2-6mm²)
- · Crimp 22-10 AWG (0.5-6mm²) insulated and non-insulated terminals
- · Crimp 7-8mm ignition terminals
- Durable and corrosion resistant
- · Steel construction
- · Comfortable easy grip
- · Two piece handle
- · Ideal for home wiring, electronics and automotive work



PRICE EX.VAT

#### **102 PIECE CRIMPING TOOL SET**

#### JEFCRIMS102

- Crimping insulated terminals size:
   1.5mm² (red), 2.5mm² (blue) and
   6.0mm² (yellow)
- Crimps round non-insulated terminals size: 1.5mm<sup>2</sup>, 2.5mm<sup>2</sup> and 4.6mm<sup>2</sup>
- Shears bolts size: 2.6, 3.0, 3.5, 4.0 and 5.0mm
- Removes wire insulation up to 165mm in length
- 99 piece terminals including: 44pc blue terminals at 2.5mm², 44pc red terminals at 1.5mm², 11pc yellow terminal at 6.0mm²

#### Includes

- · 1 x 6 Way Crimping Tool
- · 1 x Wire Stripping Tool
- · 1 x Black Tape
- 99 Piece insulated crimping terminals



# SAWS

# HACKSAWS · 24 Teeth per inch · Soft Grip Handle Design 2 PROFESSIONAL PROFESSIONAL

1 JEFHCSAW06-MN01 6" Junior Hacksaw 65MN Steel 6"/150mm 90°, 45°		PRODUCT	DESCRIPTION	BLADE	LENGTH	CUTTING ANGLES	PRICE EX. VAT
CEMNICAL AND CHARLES C	1	JEFHCSAW06-MN01	6" Junior Hacksaw	65MN Steel	6"/150mm	90°, 45°	
2 JEFRICSAWU6-WIND2 6" Professional Junior Hacksaw 65Min Steel 6"/150mm 90", 45"	2	JEFHCSAW06-MN02	6" Professional Junior Hacksaw	65MN Steel	6"/150mm	90°, 45°	
3 JEFHCSAW12-BM01 12" Professional Hacksaw Bi-Metal Steel 12"/300mm 90°, 45°	3	JEFHCSAW12-BM01	12" Professional Hacksaw	Bi-Metal Steel	12"/300mm	90°, 45°	

# **KNIVES & BLADES**



#### **SAFETY BOX CUTTER**

#### **JEFKFSBC**

- Quickly & safely cuts strapping, tape, cardboard, wrapping & film
- Durable plastic body with both concealed & protruding blade
- Hi-visibility design for easy identification
- Ergonomic soft touch grip for comfortable control
- Including lanyard eyelet for convenient fixing to belt loop or tool belt







#### **AUTO RETRACTING SAFETY KNIFE**

#### JEFKNSA

- · Extra-safe, automatically retracting blade
- · Interlock nose for blade security





#### **FOLDING LOCK BACK UTILITY KNIFE**

#### JEFKFFLBU

- · Blade lock and release switch
- · Spare blade holder
- · Ergonomic lower rubber grip handle for comfort & safety





# UTILITY BLADE (PACK OF 10)

#### JEFKFBUT10

- · Blade length: 61mm
- · Blade thickness: 0.65mm
- · Blade height: 19mm
- · Pack of 10



# UTILITY BLADE DISPENSER

#### JEFKFBD

- · Blade length: 61mm
- · Blade thickness: 0.65mm
- · Blade height: 19mm
- · Pack of 100



PRICE EX.VAT

# SNAP OFF BLADE (PACK OF 10)

#### JEFKFBS010

- · Blade height: 18mm
- · Each blade has 7 snap off cells
- · Pack of 10

PRICE EX.VAT

#### **38MM RAZOR BLADE SCRAPER (1.5")**

#### JEFRBSCRP038

- · Retracting Razor Scraper With Soft Grip & 1.5"(38mm) Blade
- This Jefferson razor blade scraper has a retractable blade for safety and a non-slip soft grip on the body
- · Includes 1.5" (38mm) blade
- Spare blades available in 10pc packs (JEFRBDIS038-10)

# 38MM RAZOR BLADE DISPENSER - PACK OF 10 BLADES (1.5")

#### JEFRBDIS038-10

- · Pack of 10 x 1.5"(38mm) Blades
- 10 piece blade dispenser with compatible blades for the Jefferson Razor Blade Scraper (JEFRBSCRP038)
- · 38mm / 1.5"







# **DECORATING**

# 3 PIECE GENERAL PURPOSE PAINT BRUSH SET

#### JEFPNTBSG-03

- Pure bristles square cut ends
- · Includes: 1", 1½" and 2" brushes



# 6 PIECE GENERAL PURPOSE PAINT BRUSH SET

#### JEFPNTBSG-06

- · Pure bristles square cut ends
- Includes: 1x ½",
   2 x 1", 2 x 1½"
   & 1 x 2" brushes



PRICE EX.VAT

#### **WOODEN HANDLE SCRAPERS**

- · Available in 38mm, 50mm & 76mm
- · Decorators scraper with 38mm / 50mm / 76mm wide knife
- Tempered blade that extends through the handle in one piece
- $\cdot\,$  Hardwood handle complete with hanging hole



	PRODUCT	DESCRIPTION	PRICE EX. VAT
1	JEFSCRPW038	38mm Wooden Handle Scraper (1.5")	
2	JEFSCRPW050	50mm Wooden Handle Scraper (2")	
3	JEFSCRPW076	76mm Wooden Handle Scraper (3")	



# 400ML HEAVY DUTY CAULKING GUN

#### JEFGUNCLK400-HD

- · Non-drip function
- Black heat treated hardened pushing bar
- · Quick-release with hook end
- · Aluminium handle & trigger
- Pushing Power: 4,000N
- Thrust Ratio: 18:1
- · Cartridge: 400ml



NEW!

# FILES & CHISELS

#### **5 PIECE 8" ENGINEERING FILE SET**

#### JEFENGFIS-05

- · Manufactured from heavy-duty hardened and tempered high-carbon steel
- · Treated with rust preventative oil to provide a tough protective finish
- · Ideal for filing flat surfaces, sharp corners and shoulders as well as for deburring
- · Ergonomic soft-handle design for a comfortable grip
- · Second cut



SET INCLUDES: HAND, TRIANGLE, ROUND, SOLIARE, HALF-ROUND





#### **4 PIECE WOOD CHISEL SET**

#### JEFCHIWDS-04

- · Chrome Vanadium steel blades
- · Soft grip handles
- · Durable metal striking caps

6mm / 1/4".

12mm / 1/2". 19mm / 3/4".

25mm / 1"







#### **16 PIECE CHISEL AND PUNCH SET**

#### JEFCHIPUNS-16

- · Sand blasted carbon steel
- · Set Includes:

3 x Pin Punch:

1/8", 3/16", 1/4"

3 x Taper Punch:

1/8", 3/16", 1/4" 3 x Center Punch:

5/16", 3/8", 1/2"

5 x Cold Chisel:

5/16", 1/2", 5/8", 3/4", 7/8"

2 x Line-up Punch:

3/16", 1/4"



PRICE EX.VAT

# **PUNCHES & PLIERS**

#### **INDIVIDUAL CENTRE PUNCHES**

- · For piercing or marking for starting drills in metals and other hard materials
- · Chome Vanadium steel (CR-V) with black-oxide protective-coating
- · Durable striking caps
- · Soft non-slip hand-grips
- · Protective hand guards





	PRODUCT	DESCRIPTION	PRICE EX. VAT
1	JEFCENP01-4	1/4" Centre Punch (6mm)	
2	JEFCENP03-8	3/8" Centre Punch (10mm)	
3	JEFCENP01-2	1/2" Centre Punch (12mm)	

#### **5 PIECE EXTRA LONG PARALLEL PIN PUNCH SET**

#### JEFPPPS05EL

- · 205mm steel shafts
- · 1 x 1/8" (3mm) · 1 x 3/16" (5mm)
- · 1 x 1/4" (6mm)
- · 1 x 5/16" (8mm)
- · 1 x 3/8" (10mm)



#### **6 PIECE PARALLEL PIN PUNCH SET**

#### JEFPPPS06

- · 150mm steel shafts
- · 1 x 1/8" (3mm)
- · 1 x 5/32" (4mm)
- · 1 x 3/16" (5mm)
- · 1 x 1/4" (6mm)
- · 1 x 9/32" (7mm)
- · 1 x 5/16" (8mm)





#### **CIRCLIP PLIER SETS**

- · Manufactured from drop forged high carbon steel
- · Black and polished finish

- · Red rubber handles for comfortable gripping.
- · Used for both external and internal retaining clips

#### JEFPLICI07-4

- · 7" (straight) Internal circlip pliers
- · 7" (bent nose) Internal circlip pliers
- · 7" (straight) External circlip pliers
- · 7" (bent) External circlip pliers





PRICE EX.VAT

10 LOCKING



#### JEFPLICIR9-04

- · 9" (straight) Internal circlip pliers
- · 9" (bent nose) Internal circlip pliers
- · 9" (straight) External circlip pliers
- · 9" (bent) External circlip pliers





PRICE EX.VAT

#### **3 PIECE LARGE CAPACITY WATER PUMP PLIER SET**

#### JEFPLIWTL-03

- · Heavy duty 7, 10 & 12" water pump pliers
- · Large capacity with 10 locking positions
- · Chrome vanadium steel with rubber grip handles
- · Supplied with canvas storage pouch
- · Slip-lock size adjustment
- · Narrow jaw profile
- · Wear-resistant teeth
- · Fast manual adjustment
- · Ergonomic handles





#### INDIVIDUAL WATER PUMP PLIERS

· 10", 16" & 20" available



- · Jaw Length: 38mm
- · Overall Length: 10" / 250mm
- · Chrome Vanadium



- · Rust resistant carbon steel
- · Satin nickel finish
- 16" & 20" available



	PRODUCT	DESCRIPTION	PRICE Ex. Vat
1	JEFPLIWTP10	10" Water Pump Pliers	
	JEFPLIWTP16	16" Water Pump Pliers	
	JEFPLIWTP20	20" Water Pump Pliers	

CR-V

#### **PLIERS & CUTTERS**

Manufactured with Chrome Vanadium steel, these professional quality pliers are reliable and complete with comfort grip handles for improved handling.







	PRODUCT	DESCRIPTION	JAW LENGTH	OVERALL LENGTH	CUT CAPACITY (PIANO WIRE)	PRICE Ex. Vat
1	JEFPLICOM07	7" Combination Pliers	38mm	7"/180mm	2.0mm	
2	JEFPLICOM08	8" Combination Pliers	42mm	8"/200mm	2.0mm	
3	JEFPLILNS06	6" Long Nosed Pliers	52mm	6" / 160mm	1.6mm	
4	JEFPLILNS08	8" Long Nosed Pliers	77mm	8"/200mm	1.6mm	
5	JEFPLIDIA06	6" Diagonal Cutting Pliers	22mm	6" / 160mm	2.0mm	
6	JEFPLIEND07	7" End Cutting Pliers	32mm	7" / 180mm	2.0mm	
7	JEFPLIFEN0105	10.5" Fencing Pliers	25mm	10.5" / 266mm	3.0mm	

#### **3 PIECE VDE PLIER SET**

#### JEFPLIVDES-03

- · TPE handles
- · CR-V heads
- · Includes:

 $8^{\prime\prime}$  / 200mm VDE Combination Pliers - 580N cutting force 8" / 200mm VDE Long Nosed Pliers - 570N cutting force 7" / 180mm VDE Side Cutting Pliers- 700N cutting force

- · VDE-approved; 1000V AC / 1500V DC
- · Manufactured to DIN EN IEC 60900
- · HRC55 DIN 5749



#### **3 PIECE HIGH-VIS PLIER SET**

#### JEFPLIGENH-03

- · TPE handles
- · CR-V heads
- · Includes:

8" / 200mm Combination Pliers - 580N cutting force 8" / 200mm Long-Nosed Pliers - 570N cutting force

7" / 180mm Side-Cutting Pliers 700N cutting force

· HRC55 - DIN 5749



# PRY BARS & DIGGING BARS

#### **60" BENT DIGGING BAR**

#### JEFBARDG60

- · Hardened and tempered steel bar
- · Powder coated finish
- · Angled chisel end and square point end
- · Size x length: 25 x 1500mm







#### 36" JUMBO PRY BAR - 25° OFFSET

#### JEFBARPR36

- · Hardened steel with powder coated finish
- · Size: 36", 900mm, 25° offset





#### **HEAVY DUTY JUMBO PRY BAR - 30° OFFSET**



#### **4 PIECE PRY BAR SET**

#### JEFBARPS04

- · Manufactured from drop forged Chrome Vanadium tempered steel
- · Blackened finish for improved durability
- · Classic handles with comfortable contoured arip
- · Fabricated using impact resistant materials
- · Contoured grips
- · Sizes:
- 200mm
- 300mm 450mm

600mm



PRICE EX.VAT

#### **HEAVY DUTY 4 PIECE HAMMER CAP PRY BAR**

#### **SET**


#### JEFBARPS04HD

- · Heavy-duty, angled shafts, manufactured from Chrome Molybdenum steel with blackened finish
- · Each fitted with textured comfort grip handle and hammer cap
- · Size x length: 6 x 200mm
- 8 x 300mm
- 11 x 460mm
- 11 x 610mm





#### **HEAVY DUTY JUMBO 4** PIECE PRY BAR SET





# **CLAMPS & VICE GRIPS**

#### **VICE GRIPS**







	PRODUCT	DESCRIPTION	WIRE CUTTER	PRICE EX. VAT
1	JEFAGP07LN	7" Long Nosed Vice Grips	NO	
	JEFAGP09LN	9" Long Nosed Vice Grips	NO	
2	JEFAGP05C	5" Curved Jaw Vice Grips	YES	
	JEFAGP07C	7" Curved Jaw Vice Grips	YES	
	JEFAGP10C	10" Curved Jaw Vice Grips	YES	
3	JEFAGP10S	10" Straight Jawed Vice Grips	NO	

CR-V

#### 11" C-CLAMP WITH SWIVEL PADS





The F-Clamp has a wider opening capacity (throat) than the G-Clamp. Our screw

**SCREW TYPE F-CLAMP** 

#### **RATCHET TYPE F-CLAMP**

The F-Clamp has a wider opening capacity (throat) than the G-Clamp. The ratchet clamp has a maximum clamping force of 8,000N.



10" Ratchet Type F-Clamp

12" Ratchet Type F-Clamp 25 x 12mm

# PRODUCT DESCRIPTION PROCLET 10" Screw Type F-Clamp 30 x 12mm JEFCLF12 JEFCLF24 JEFCLF24 JEFCLF32 JEFCLF32 JEFCLF40 J

1 JEFCLR10

JEFCLR12

#### **HEAVY DUTY G-CLAMPS**

Two types of Heavy Duty G-Clamps are available within the Jefferson range the coarse thread and a finer variety for those jobs which require a higher degree of control over the clamping force.



#### **G-CLAMPS**

Our range of coarse thread, light trade G-Clamps are manufactured from drop forged steel and complete with tommy bar handle and swivel shoe. For use on a variety of



PRODUCT	DESCRIPTION	PRICE EX. VAT
JEFCLGLTCT04	4" Coarse Thread Light Trade G-Clamp	
JEFCLGLTCT06	6" Coarse Thread Light Trade G-Clamp	
JEFCLGLTCT08	8" Coarse Thread Light Trade G-Clamp	

#### **TUNDRAT BAR CLAMPS**

- · Designed for clamping large section workpieces
- · Ideal for woodworking, particularly joinery work and other fabrication tasks where assembly is required
- · Cast iron head and slides
- · Steel T-bar handle with pin

PRODUCT	DESCRIPTION	CAPACITY	CLAMPING FORCE	PRICE EX. VAT
TUNTS136-48	Tundra 48" T Bar Clamp	48"	9806N	
TUNTS136-54	Tundra 54" T Bar Clamp	54"	9806N	
TUNTS136-78	Tundra 78" T Bar Clamp	66"	9806N	
TUNTS136-EXT48	Tundra T Bar 48" Extension Bar	78"	9806N	



#### TUFFGRIP BAR CLAMP & SPREADER

SWITCH BETWEEN CLAMP

& SPREADER MODE

- · Soft TPU cushions
- · Heavy duty steel rail
- · Clamp/spreader adjustment
- · Comfortable nylon leverage handle
- · Quick release trigger
- · Easy switch between clamp and spreader mode





	PRODUCT	DESCRIPTION	LENGTH	CAPAPCITY	CLAMPING Force	PRICE Ex. Vat
	JEFCLTFBR150	Tuffgrip 150mm Bar Clamp & Spreader	150mm / 6"	80 x 150mm	1350N	
	JEFCLTFBR300	Tuffgrip 300mm Bar Clamp & Spreader	300mm / 12"	80 x 300mm	1350N	
	JEFCLTFBR450	Tuffgrip 450mm Bar Clamp & Spreader	450mm / 18"	80 x 450mm	1350N	
1	JEFCLTFBR600	Tuffgrip 600mm Bar Clamp & Spreader	600mm / 24"	80 x 600mm	1350N	

#### **TUFFGRIP SPRING CLAMPS**

- · Adjustable protective cushions
- · Robust plastic frame
- · Contoured handles provide a comfortable grip








	PRODUCT	DESCRIPTION	CLAMP LENGTH	CLAMPING Force	CLAMP Capacity	PRICE EX. VAT
1	JEFCLTFSP02-04	Tuffgrip 4 Piece 2" / 50mm Spring Clamps	100m / 4.5"	120N	50mm / 2"	
2	JEFCLTFSP03-04	Tuffgrip 4 Piece 3" / 75mm Spring Clamps	175mm / 7"	150N	75mm / 3"	

# **VICES**

#### **DRILL PRESS VICES**

Ideal for use on surface grinders and pillar drills, all our Jefferson drill presses come with serrated jaws for easy gripping and pre drilled holes for bench mounting.



PRODUCT	DESCRIPTION	JAW WIDTH	JAW OPENING	DIMENSIONS	WEIGHT	PRICE EX. VAT
JEFDPV4	4" Drill Press Vice	100mm	98mm	180 x 70 x 230mm	2.8kg	
JEFDPV5	5" Drill Press Vice	125mm	128mm	210 x 70 x 190mm	5.0kg	
JEFDPV6	6" Drill Press Vice	150mm	157mm	240 x 80 x 230mm	7.2kg	

#### **LIGHT TRADE BENCH VICES**

- · Cast Iron body
- · EN9 Steel jaws
- · 1 Tonne clamping capacity
- · Cast iron fixed bench vice
- · Multi-purpose ideal for various light trade duties
- · Roll threaded for fluid tightening and loosening motion
- · Featuring robust anvil working surface
- · Pre-drilled holes for bench mounting



PRODUCT	DESCRIPTION	JAW WIDTH	JAW Opening	DIMENSIONS	WEIGHT	PRICE EX. VAT
JEFBV4-LT	4" Bench Vice (Light Trade)	100mm	100mm	280 x 140 x 155mm	7.70kg	
JEFBV5-LT	5" Bench Vice (Light Trade)	135mm	125mm	350 x 165 x 170mm	12.0kg	
JEFBV6-LT	6" Bench Vice (Light Trade)	155mm	150mm	370 x 171 x 175mm	13.5kg	
JEFBV8-LT	8" Bench Vice (Light Trade)	205mm	200mm	457 x 203 x 203mm	20.0kg	



#### **HEAVY DUTY BENCH VICES**

Our heavy duty, cast iron bench vices are complete with serrated jaws for easy gripping and pre-drilled holes for bench mounting. They offer smooth and fast operation with a robust lever and grey iron castings that are manufactured to resist distortion under pressure. Ideal for workshops, machinery and engineering applications.










DESCRIPTION	JAW WIDTH	JAW OPENING	DIMENSIONS	WEIGHT	PRICE Ex. Vat
4" Bench Vice	100mm	137mm	350 x 160 x 160mm	9.25kg	
5" Bench Vice	125mm	183mm	440 x 190 x 200mm	16.0kg	
6" Bench Vice BEST SELLER	150mm	173mm	520 x 220 x 230mm	23.5kg	
8" Bench Vice	200mm	200mm	600 x 250 x 280mm	37.5kg	
	4" Bench Vice 5" Bench Vice 6" Bench Vice BEST SELLER	4" Bench Vice       100mm         5" Bench Vice       125mm         6" Bench Vice BEST SELLER       150mm	4" Bench Vice       100mm       137mm         5" Bench Vice       125mm       183mm         6" Bench Vice BEST SELLER       150mm       173mm	4" Bench Vice     100mm     137mm     350 x 160 x 160mm       5" Bench Vice     125mm     183mm     440 x 190 x 200mm       6" Bench Vice BEST SELLER     150mm     173mm     520 x 220 x 230mm	4" Bench Vice       100mm       137mm       350 x 160 x 160mm       9.25kg         5" Bench Vice       125mm       183mm       440 x 190 x 200mm       16.0kg         6" Bench Vice BEST SELLER       150mm       173mm       520 x 220 x 230mm       23.5kg

# **5" PIPE VICE**

#### JEFBV5LGT

- · Built-in pipe jaws
- · Serrated Jaws for easy gripping
- · Comes with pre-drilled holes for bench-mounting
- · Jaw Width: 125mm
- · Jaw Opening: 125mm
- · Weight: 15.0kg
- · Dimensions: 420 x 230 x 200mm

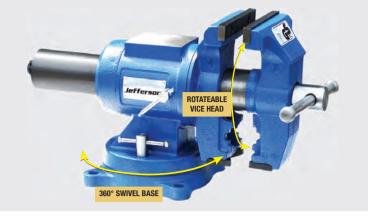








#### **6" FABRICATED STEEL VICE**

#### JEFBVFS6

- · Built-in pipe jaws
- · Serrated Jaws for easy gripping
- · Comes with pre-drilled holes for bench-mounting
- · Jaw Width: 150mm
- · Jaw Opening: 190mm
- · Weight: 22kg
- · Dimensions: 520 x 220 x 230mm







# INDUSTRIAL

### **6.5" DUCTILE IRON BENCH VICE**

### JEFBVD165

Ductile Iron, also known as Spheroidal Graphite Iron, was developed over 60 years ago in the USA, while most varieties of cast iron are brittle, Ductile Iron has much more impact and fatique resistance due to its nodular graphite inclusions.

- · Jaw Width: 100mm
- · Jaw Opening: 137mm
- · Weight: 32.2kg
- · Dimensions:

350 x 160 x 160mm







# INDUSTRIA

### **8" DUCTILE IRON BENCH VICE**

#### JEFBVD180QR

- · Quick release jaws
- · 360 swivel base with locking lever
- · Fixed pipe jaws
- · Large anvil
- · Jaw Width: 200mm
- · Jaw Opening: 254mm
- · Weight: 32.7kg
- · Dimensions: 680 x 280 x 320mm









# **AXES & HAMMERS**

# **FIBREGLASS HANDLE 6.5LB MAUL AXE**



# **FIBREGLASS HANDLE** 4.5LB FELLING AXE JEFHA45 · Head Weight: 4.5lb / 2.0kg · Handle Length: 820mm



# FIBREGLASS HANDLE **1.25LB HATCHET**





# **FIBREGLASS HANDLE BALL PEIN HAMMERS**

- · Rounded and usually used for shaping metal and closing rivets, the ball pein hammer is the most suitable for general use
- · Shafts are glass-fibre and are fitted with rubber grips



PRODUCT	DESCRIPTION	PRICE Ex. Vat
JEFHP24	24oz Ball Pein Hammer	
JEFHP32	32oz Ball Pein Hammer	
JEFHP40	40oz Ball Pein Hammer	

# **FIBREGLASS HANDLE SLEDGE HAMMERS**

- · Shafts are glass-fibre and fitted with rubber grips
- · Swing like an axe for heavier jobs, such as driving in stakes and breaking up concrete, stone or masonry
- · Use just the weight of the head for lighter jobs

PRODUCT	DESCRIPTION	PRICE EX. VAT
JEFHS4	4lb Mini Sledge Hammer	
JEFHS7	7lb Sledge Hammer	
JEFHS10	10lb Sledge Hammer	
JEFHS12	12lb Sledge Hammer	
JEFHS14	14lb Sledge Hammer	

# **FIBREGLASS HANDLE CLAW HAMMERS**

- · The most popular type of hammer for general work, fitted with a glass-fibre shaft and rubber grips
- · The claw can be used to lever up floorboards or other jobs where a lever is required



# **FIBREGLASS HANDLE CLUB HAMMERS**

- · Sometimes called a lump hammer, it has a double faced head, and is useful for light demolition work, driving steel chisels and masonry nails
- · As debris is likely to fly, the wearing of safety glasses and working gloves is recommended
- · Available in 2.5lb and 4.0lb (1.3kg - 1.8kg)

PRODUCT	DESCRIPTION	PRICE EX. VAT
JEFHC25	2.5lb Club Hammer	
JEFHC4	4lb Club Hammer	

# **200Z ONE PIECE FORGED HATCHET**

#### JEFSHAC20

- · Manufactured from one piece forged steel
- · Pre sharpened blade for fast precise cuts
- · High quality carbon steel for durability
- · Precision balanced
- · Non-slip soft grip ergonomic comfort handle
- Polypropylene / Thermoplastic Rubber handle for effective grip
- · Dimensions:
- 350 x 125 x 30mm
- · Weight: 20oz / 0.96kg



# 200Z ONE PIECE FORGED BRICK HAMMER

#### JEFSHBR20

- · Manufactured from one piece forged steel
- Precision ground chisel for accurate shaping of masonry
- · Heat treated & tempered for long lasting performance
- Ergonomic anti-slip grip for increased user comfort and long lasting performance
- Polypropylene / Thermoplastic Rubber handle for effective grip
- · Dimensions:
- 310 x 178 x 30mm
- · Weight: 20oz / 1.02kg



#### **ONE PIECE FORGED CLUB HAMMER**

- · Manufactured from one piece forged steel
- · Non-slip soft grip ergonomic comfort handle
- Polypropylene / Thermoplastic Rubber handle for effective grip
- · High quality steel for durability
- · Dimensions:
- 2.5lb 298 x 350 x 80mm
- 4lb 310 x 100 x 40mm
- · Weight:
- 2.5lb 1.26kg
- 4lb 1.95kg



PRODUCT	DESCRIPTION	I E
JEFSHCB25	2.5lb One Piece Forged Club Hammer	
JEFSHCB40	4.0lb One Piece Forged Club Hammer	

# **ONE PIECE FORGED CLAW HAMMER**

- · Manufactured from one piece forged steel
- High strength single piece steel to maximise driving force whilst minimising user fatigue
- · Curved claw head for nail and pin removal
- Polypropylene / Thermoplastic Rubber handle for effective grip
- · Dimensions:
  - 16oz 325 x 128 x 30mm 20oz - 345 x 142 x 33mm
- · Weight:
- 16oz 0.88kg
- 20oz 0.97kg



PRODUCT	DESCRIPTION	EX. VAT
JEFSHCL16	16oz One Piece Forged Claw Hammer	
JEFSHCL20	20oz One Piece Forged Claw Hammer	

# 2.0LB (320Z) BLACK RUBBER MALLET

#### JEFMALRUBL02

- All purpose mallet ideal for use in automotive, industrial and DIY environments
- · Durable fibreglass handle
- · Head Weight: 2lb
- · Length: 270mm



PRICE EX.VAT

# **1KG DEAD BLOW HAMMER**

#### JEFHDBL10

- · Black SBR high quality rubber
- Oil proofCold endurance
- Steel beads inside of head
- · Weight: 1kg
- · Length: 350mm



# **FENCE TENSIONING**

### **FENCE WIRE TENSIONING TOOL**

#### JEFFENTEN

Manufactured from carbon steel hardened and tempered with 600mm long handle for excellent leverage and a pivoting 'Durbar' steel locating foot to grip any post type whilst straining wire.

- $\boldsymbol{\cdot}$   $\,$  Ideal for one person use
- · Up to 4mm diameter wire
- · Overall length: 760mm









# **DEMOLITION**











# **BOLT CUTTERS**

### **STEEL HEAD BOLT CUTTERS**

- · Powder-coated steel tubular handle
- · Comfortable rubber grips
- · Adjustable cutting edge
- · Chrome vanadium steel head





#### **DROP FORGED BOLT CUTTERS**

- · Drop-forged steel handle
- · Adjustable jaws
- · Alloy steel blade
- · Chrome molybdenum steel head





# RIVETING

# **HEAVY DUTY LAZY TONG RIVETER**

#### JEFRIVLT01

- · Supplied with five nozzle sizes: 2.4mm(3/32"), 3.2mm(1/8"), 4mm(5/32"), 4.8mm(3/16"), 6.4mm(1/4")
- · Supplied with spanner
- · Die cast head with steel jaw case and three-piece jaws
- · For use with blind aluminum, steel and stainless steel rivets
- · Suitable for repetitive riveting tasks 820mm extended length





# **10" HAND RIVETER**

#### JEFRIVHND10

- · Aluminium body, steel handles with PVC grips
- · Includes 4 nozzles & adjustment spanner

Suitable for blind rivets of the following capacity:

- · Stainless steel:
- 2.4mm (3/32")
- 3.2mm (1/8")
- 4.0mm (5/32")





#### 21" DOUBLE HAND RIVETER

#### JEFRIVHND21D

- · Heavy duty and durable construction
- · Twin steel handle with ergonomic PVC grips provide excellent leverage
- · Spent mandrels are collected in the plastic container for safety & ease of disposal
- · Includes 5 nozzles & adjustment spanner

Suitable for aluminium & stainless steel blind rivets of the following capacity:

- · 3.2mm (1/8")
- · 4.0mm (5/32")
- · 4.8mm (3/16")
- · 6.0mm (8/32")
- · 6.4mm (1/4")







# **SOCKET SETS & RATCHETS**

# **24 PIECE 1/4" SOCKET SET** JEFS0C009 Set Includes · 1x 1/4" Extension Bar (50mm) · 1x 1/4" Square Drive Ratchet Wrench (45 Teeth) · 11x 1/4" Drive Sockets: 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14m · 5x Hex-Plus: 3, 4, 5, 6, 8mm · 6 x 1/4" Torx Security: T10, T15, T20, T25, T30, T40 PRICE EX.VAT





# **52 PIECE 1/4" DRIVE SOCKET SET**

#### JEFS0C012

- · 72 Tooth Ratchet Gear
- · 13 x 1/4" dr. Socket including: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12. 13. 14mm
- · 7 x 1/4" dr. Deep Socket including: 6, 7, 8, 10, 11, 12, 13mm
- · 21 x 1/4" dr. Bit Sockets including: T10, 15, 20, 25, 30, 40, H3, 4, 5, 6, 7, 8, PH1, 2, 3, PZ1, 2, 3, SL4, 5.5, 7
- · 2 x 1/4" dr. Extension Bar: 50mm & 100mm
- · 1 x 1/4" dr. Spinner Handle
- · 1 x 1/4" dr. Universal Joint
- · 1 x 1/4" dr. Bit Adaptor
- · 1 x 1/4" dr. Flexible Extension bar 150mm

INDUSTRIAL

· 3 x Hex Key Wrench 1.5-2-2.5mm



· Chrome Vanadium



PRICE EX.VAT





#### JEFS0C013

· 1 x 72 Tooth Ratchet Gear

· 17 x 3/8" dr. Sockets: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24mm

· 5 x 3/8" Deep Sockets: 8. 10. 13. 17. 19mm

· 7 x Hex dr. Sockets: 3, 4, 5, 6, 7, 8, 10mm

· 2 x 3/8" dr. Extension Bar: 75mm 250mm

· 2 x 3/8" dr. Spark plug socket: 16mm, 21mm

· 1 x 3/8" dr. Universal Joint



24 PIECE 1/2" DRIVE SOCKET SET



PRICE EX.VAT



# JEFS0C015

· 72 Tooth Ratchet Gear

· 17 x 1/2" dr. Socket including: 8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32mm

· 2 x 1/2" dr. Extension Bar: 75mm, 250mm

· 1 x 1/2" dr. Sliding head: 1/2" (M) x 3/8" (F) · 2 x 1/2" dr. Spark plug socket:

16mm, 21mm

· 1 x 1/2" dr. Universal Joint

· 1 x 1/2" dr. Ratchet Wrench: 72T

· Chrome Vanadium













# 29 PIECE 1/2" DRIVE SOCKET SET

#### JEFS0C017

- 19x 1/2" dr. sockets: 8, 9, 10, 11, 12, 13,
   14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27,
   30, 32mm
- · 3x 1/2" deep dr. sockets: 17, 19, 22mm
- · 1x 1/2" dr. universal joint
- · 1x 1/2" extension bar: 5"
- · 1x 1/2" extension bar: 10"
- · 1x 1/2" 3-way adaptor
- · 2x 1/2" spark plug socket 16, 21mm
- · 1x 1/2" dr. ratchet handle





**NEW!** 





# **34 PIECE 1/2" DRIVE SOCKET SET**

#### JEFS0C014

- · 72 Tooth Ratchet Gear
- 26 x 1/2" Dr. Socket including: 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32, 34 and 36mm
- · 3 x 1/2" Extension Bar: 75mm, 125mm and 250mm
- · 1 x dr. Sliding head: 1/2"(M) x 3/8"(F)
- · 1 x Universal joint 1/2"
- · 1 x F Handles: 380mm
- · 1 x 1/2" dr. Ratchet Handles:
- $\,\cdot\,$  2 x 1/2" dr. Spark Plug: 16mm and 21mm
- · Chrome Vanadium













# 94 PIECE 1/4" & 1/2" DRIVE SOCKET SET

#### JEFS0C016

- · 72 Tooth Ratchet Gear
- 1/4" Drive sockets and extensions:
- · 13 x Sockets 1/4": 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm
- · 8 x Long sockets 1/4":
- 6, 7, 8, 9, 10, 11, 12, 13mm
- · 6 x Socket bits 1/4":
- T8, T10, T15, T20, T25, T30
- 4 x Socket bits 1/4": H3. H4. H5. H6
- · 3 x Socket bits 1/4": SL4, SL5.5, SL7mm
- · 2 x Socket bits 1/4": PH1, PH2
- · 2 x Socket bits 1/4": PZ1, PZ2
- · 3 x Hex wrenches: 1.5, 2, 2.5, 3mm
- · 2 x Extensions 1/4": 50 and 100mm
- 1 x Universal joint 1/4"
- · 1 x T-type handle 1/4": 115mm
- · 1 x Spinner handle 1/4": 150mm
- · 1 x Flexible extension 1/4": 150mm
- · 1 x Adaptor 1/4": 30mm
- · 1 x Ratchet handle 1/4" (72 teeth)

- · 1/2" Drive sockets and extensions:
- 17 x Sockets 1/2": 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32mm
- · 4 x Long sockets 1/2": 14, 15, 17, 19mm
- · 2 x Sockets 1/2" for spark plugs: 16, 21mm
- · 2 x Extensions 1/2": 125, 250mm
- · 1 x Holder 1/2" for bits: 5/16"
- · 1 x Universal joint 1/2"
- · 1 x Adaptor
- · 1 x Ratchet handle 1/2" (72 teeth)
- · 4 x Bits 5/16" 30mm: H8 / H10 / H12 / H14
- · 4 x Bits 5/16" 30mm: T40 / T45 / T50 / T55
- · 1 x dr. Sliding head: 1/2"(M) x 3/8"(F)
- 1 x Universal joint 1/2"
- · 1 x F Handles: 380mm
- · 1 x 1/2" dr. Ratchet Handles:
- · 2 x 1/2" dr. Spark Plug: 16mm and 21mm
- · Chrome Vanadium














# **14 PIECE 3/4" TRUCK SOCKET SET**

#### JEFS0C005

- · 10 x sockets: 22mm, 24mm, 27mm, 30mm, 32mm, 36mm, 38mm, 41mm, 46mm, 50mm
- · 1 x dr. Ratchet handle: 3/4" 500mm
- · 2 x Extension bar: 100mm, 200mm
- · 1 x Sliding T-bar: 455mm
- · Complete in a metal storage case





#### 21 PIECE 3/4" TRUCK SOCKET SET

#### JEFS0C006

- · 16 x sockets: 19mm, 21mm, 22mm, 23mm, 24mm, 26mm, 27mm, 29mm, 30mm, 32mm, 35mm, 36mm, 38mm, 41mm, 46mm, 50mm
- · 1 x 1-24t Extendable ratchet handle: 495-770mm
- · 3 x Extension bars: 100mm, 200mm, 400mm
- · 1 x Sliding T-bar: 450mm
- · Complete in a metal storage case









INDUSTRIAL

COMES COMPLETE WITH EXTENDABLE RATCHET (495MM - 770MM)

#### **22 PIECE 1" TRUCK SOCKET SET**

### JEFS0C007

- · 17 x sockets: 36mm, 38mm, 41mm, 46mm, 50mm, · 1 x Ratchet head handle: 550mm 54mm, 55mm, 58mm, 60mm, 63mm, 65mm, 67mm, 70mm, 71mm, 75mm, 77mm, 80mm
- · 1 x detachable pear ratchet head with flip reverse
- · 2 x Extension bar: 200mm, 400mm
- · 1 x Sliding T-bar
- · Complete in a metal storage case



**FULLY EXTENDED 770MM** 

500MM





# JEFSOCRAT3-4EX

- · 24 Teeth
- · Heavy duty chrome vanadium finish
- · Extendable from 495mm to 770mm









REPAIR KIT AVAILABLE

# 3/4" 24T SOCKET RATCHET

# JEFSOCRAT3-4

- · 24 Teeth
- · Chrome vanadium mirror polish finish
- · Hardened Steel
- · Reversible with quick release mechanism







REPAIR KIT AVAILABLE

# PRICE EX.VAT

PRICE EX.VAT

### **1" 24T PEAR STYLE SOCKET RATCHET**

#### JEFSOCRIN1-0

- · 24 Teeth
- · Chrome vanadium mirror polish finish
- · Hardened Steel
- · Reversible with quick release mechanism









REPAIR KIT AVAILABLE





#### **SOCKET RATCHETS**

Each Socket Ratchet Features:

- · 72 Teeth
- · Reversible with quick release mechanism



PRODUCT	DESCRIPTION	PRICE Ex. Vat
JEFSOCRAT72-14	1/4" 72T Socket Ratchet	
JEFSOCRAT72-38	3/8" 72T Socket Ratchet	
JEFSOCRAT72-12	1/2" 72T Socket Ratchet	

### **INDUSTRIAL SOCKET RATCHETS**

Each Socket Ratchet Features:

- 72 Teeth
- Chrome vanadium mirror polish finish
- · Hardened Steel
- Reversible with quick release mechanism





PRODUCT	DESCRIPTION	PRICE EX. VAT
JEFSOCRIN1-4	Industrial 1/4" 72T Socket Ratchet	
IEECUCDING_0	Industrial 3/8" 72T Socket Ratchet	

# TORQUE WRENCHES & BREAKER BARS

# **BREAKER BARS**

With a hardened Chrome Vanadium finish, our Jefferson Power and Breaker Bars are the ideal workshop accessory, with long slim chrome finish handles and fully replaceable knuckle joints available.









# 1/2" SQUARE DRIVE CALIBRATED MICROMETER TORQUE WRENCH

#### JEFTRQWRH1-2B

- High quality precision tool for tightening nuts and bolts designed for applications where a specific or accurate torque is required
- Suitable for use in general mechanical, agricultural and industrial working environments
- Constructed from durable carbon steel shaft with a knurled adjustment handle, locking ring and reversible ratchet head for precise torque settings between 42-210Nm
- · Flexible tightening power and control
- Supplied with a tough moulded storage case
- Individually tested and calibrated to comply with BS EN ISO 6789-2:2017 and is supplied with a serial-numbered calibration certificate
- · Drive Capacity: 1/2" Square Drive
- · Length: 18" / 465mm
- · Torque Range: 42-210Nm
- · Resolution: 1Nm
- · Accuracy: +/-4%
- · Weight: 1.3kg





# INDUSTRIAL TORQUE WRENCHES

# **NEW! 3 PIECE CALIBRATED MICROMETER STYLE TORQUE WRENCH SET** JEFTROWRHSET03 · Flip reverse Chrome Vanadium steel ratchet head with smooth action mechanism · Scales graduated in N.m., Kg.m. or lb.ft · Calibration tolerance in accordance with BS EN IS06789-1:2017 · Wrenches are individually tested to standards with ±4% accuracy and each wrench is issued with an individually numbered test certificate Aluminium knurled handle for comfort and control . 00 · | 20 BS EN ISO 6789-2:2017 PRICE EX.VAT INDUSTRIAL

# 3/4" CALIBRATED TORQUE WRENCH 200-800NM

# JEFTRQWRH3-4B

- · Flip reverse Chrome Vanadium steel ratchet head with smooth action mechanism
- · Scales graduated in Nm, Kg/m or lb/ft
- · Calibration tolerance in accordance with BS EN IS06789-1:2017
- Wrenches are individually tested to standards with ±4% accuracy and each wrench is issued with an individually numbered test certificate
- · Aluminium knurled handle for comfort and control









**NEW!** 


**NEW!** 

# 3/4" CALIBRATED TORQUE WRENCH 300-1000NM

#### JEFTRQWRH3-4A

- · Calibrated in accordance with BS EN ISO 6789:2017
- Every wrench is tested & supplied with an individually numbered test certificate
- · Dual scales / breakback design reduces risk of torquing
- · Graduated in bothg lb/ft & nm
- · Accurate to ±4%
- · Soft grip handle





ieffersontools.com

# **WRENCHES**

# **CHROME VANADIUM ADJUSTABLE WRENCHES**

Our Adjustable Wrenches are all chrome vanadium except for JEFAW750 which is carbon steel with a chrome vanadium outer finish.







# **ADJUSTABLE WRENCHES**

- · Heavy duty
- · High-carbon steel with nickel-plated finish



	PRODUCT	DESCRIPTION	PRICE Ex. Vat
1 JE	FAW200S	8" Adjustable Wrench	
2 JE	FAW250S	10" Adjustable Wrench	
3 JE	FAW300S	12" Adjustable Wrench	

# **3 PIECE ADJUSTABLE WRENCH SET**

#### JEFAWSET03

- · Set includes sizes: 8, 10 & 12"
- · Heavy duty
- · High-carbon steel with nickel-plated finish
- · Supplied with canvas storage pouch









# **ALUMINIUM PIPE WRENCHES**

The Pipe Wrench range are all constructed from heavy duty aluminium due to the strength to weight properties of the material



INDUSTRIAL

PRODUCT	DESCRIPTION	PRICE EX. VAT
JEFPW0300	12" Aluminium Pipe Wrench	
JEFPW0350	14" Aluminium Pipe Wrench	
JEFPW0450	18" Aluminium Pipe Wrench	
JEFPW0600	24" Aluminium Pipe Wrench	
JEFPW0900	36" Aluminium Pipe Wrench	
JEFPW1200	48" Aluminium Pipe Wrench	

# **SPANNERS & SETS**

#### INDIVIDUAL COMBINATION SPANNERS

· Drop forged steel finish



PRODUCT	DESCRIPTION	PRICE EX. VAT
JEFCST06	6mm Cold Stamped Spanner	
JEFCST07	7mm Cold Stamped Spanner	
JEFCST08	8mm Cold Stamped Spanner	
JEFCST09	9mm Cold Stamped Spanner	
JEFCST10	10mm Cold Stamped Spanner	
JEFCST11	11mm Cold Stamped Spanner	
JEFCST12	12mm Cold Stamped Spanner	
JEFCST13	13mm Cold Stamped Spanner	
JEFCST14	14mm Cold Stamped Spanner	
JEFCST15	15mm Cold Stamped Spanner	
JEFCST16	16mm Cold Stamped Spanner	
JEFCST17	17mm Cold Stamped Spanner	
JEFCST18	18mm Cold Stamped Spanner	
JEFCST19	19mm Cold Stamped Spanner	



PRODUCT	DESCRIPTION	PRICE EX. VAT
JEFCST20	20mm Cold Stamped Spanner	
JEFCST21	21mm Cold Stamped Spanner	
JEFCST22	22mm Cold Stamped Spanner	
JEFCST23	23mm Cold Stamped Spanner	
JEFCST24	24mm Cold Stamped Spanner	
JEFCST25	25mm Cold Stamped Spanner	
JEFCST26	26mm Cold Stamped Spanner	
JEFCST27	27mm Cold Stamped Spanner	
JEFCST28	28mm Cold Stamped Spanner	
JEFCST30	30mm Cold Stamped Spanner	
JEFCST32	32mm Cold Stamped Spanner	

JEFFERSON INDIVIDUAL SPANNERS ARE CHROME VANADIUM, DROP FORGED STEEL FINISHED AND ARE MANUFACTURED TO **DIN STANDARD 3113** 

### **10 PIECE STUBBY SPANNER SET**

#### JEFCSS10ST

· Set includes sizes: 10, 11, 12, 13, 14, 15, 16, 17, 18, 19mm

· Complete with handy storage pouch









# 12 PIECE COMBINATION SPANNER SET

#### JEFCSS12

· Set includes sizes: 6, 7, 8, 9, 10, 11, 12, 13, 15, 17, 19, 22mm

· Complete with handy storage pouch









#### 14 PIECE IMPERIAL COMBINATION SPANNER SET

#### JEFCSSI14

- · Cold stamped matte finish
- · Supplied in portable canvas storage pouch
- · Corrosive resistant, heated and tempered
- · Complete with handy storage pouch





· Set includes sizes: 1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1 & 1-1/4"





# **18 PIECE COMBINATION SPANNER SET**

#### JEFCSS18

- · Cold stamp with fully polished head
- · Set includes sizes: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24mm







DIN 3113







# **25 PIECE COMBINATION SPANNER SET**

#### JEFCSS25

- · Cold stamp slim design
- · Satin finish
- · Fully polished head
- · DIN 3113
- · Set includes sizes: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 30, 32mm









DIN 3113










### **25 PIECE COMBINATION SPANNER SET**

#### JEFCSS25-MP

- · Fully polished
- · Complete with handy storage pouch
- · Set includes sizes:
- 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 30, 32mm







PRICE EX.VAT






# **50 PIECE COMBINATION SPANNER SET**

#### JEFCSS50

- Complete with handy storage pouch Set includes sizes:
- 10 x Stubby Combination Spanners: 10,11,12,13,14,15,16,17,18,19mm
- 5 x Double Open Ended Spanners: 6/7, 8/9, 10/11, 12/13, 14/15mm
- 5 x Ring Spanners: 6/7, 8/9, 10/11, 12/13, 14/15mm
- 5 x Double Sized Half Moon: 10/11,12/13,14/15,16/17,18/19 mm
- 5 x S-Type Ring Spanners: 10/11, 12/13,14/15,16/17,18/19mm
- 20 x Combination Spanners:
  6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 17,
  19, 20, 21, 22, 24, 25, 27, 30, 32mm







ILILII METRIC



· Mirror polish finish





PRODUCT	DESCRIPTION	PRICE EX. VAT
JEFCST34	34mm Jumbo Combination Spanner	
JEFCST36	36mm Jumbo Combination Spanner	
JEFCST38	38mm Jumbo Combination Spanner	
JEFCST41	41mm Jumbo Combination Spanner	
JEFCST46	46mm Jumbo Combination Spanner	
JEFCST50	50mm Jumbo Combination Spanner	
JEFCST55	55mm Jumbo Combination Spanner	

PRODUCT	DESCRIPTION	PRICE EX. VAT
JEFCST60	60mm Jumbo Combination Spanner	
JEFCST65	65mm Jumbo Combination Spanner	
JEFCST70	70mm Jumbo Combination Spanner	
JEFCST75	75mm Jumbo Combination Spanner	
JEFCST80	80mm Jumbo Combination Spanner	
JEFCST85	85mm Jumbo Combination Spanner	

# **6 PIECE JUMBO COMBINATION SPANNER SET**

# JEFCSS06

- $\boldsymbol{\cdot}$  Complete with handy storage pouch
- · Hardened steel, mirror polish finish
- Set includes sizes: 34, 36, 38, 41, 46, 50mm





PRICE EX.VAT

# **EXTRA LONG 7 PIECE DOUBLE RING FIXED/RATCHET END SPANNER SET**



- · Ratchet/Fixed
- · Metric

ılılılı METRIC

· Mirror Polish finish

· Set includes sizes: 8, 10, 12, 13, 14, 17, 19mm

CR-V







#### **EXTRA LONG 7 PIECE DOUBLE END RING SPANNER SET**

#### JEFDRRSS07EL

- Fixed
- · Extra-Long
- Metric
- · Mirror Polish finish
- · Set includes sizes: 8x10mm, 11x13mm, 14x15mm, 16x17mm.18x19mm. 20x21mm, 22x24mm











# **INDIVIDUAL RATCHET PODGER SPANNERS**

- · Double sided head
- · Manufactured from Chrome Vanadium
- · Black phosphate finish for improved corrosion resistance
- · Ideal for scaffolding









PRODUCT	DESCRIPTION	PRICE EX. VAT
JEFPODR10X13	10 x 13mm Ratchet Podger Spanner	
JEFPODR13X17	13 x 17mm Ratchet Podger Spanner	
JEFPODR17X19	17 x 19mm Ratchet Podger Spanner	
JEFPODR17X21	17 x 21mm Ratchet Podger Spanner	
JEFPODR19X21	19 x 21mm Ratchet Podger Spanner	
JEFPODR19X22	19 x 22mm Ratchet Podger Spanner	

PRODUCT	DESCRIPTION	PRICE Ex. Vat
JEFPODR19X24	19 x 24mm Ratchet Podger Spanner	
JEFPODR24X27	24 x 27mm Ratchet Podger Spanner	
JEFPODR24X30	24 x 30mm Ratchet Podger Spanner	
JEFPODR27X30	27 x 30mm Ratchet Podger Spanner	
JEFP0DR30X32	30 x 32mm Ratchet Podger Spanner	
JEFPODR32X36	32 x 36mm Ratchet Podger Spanner	

# INDIVIDUAL REVERSIBLE RATCHET SPANNERS

Jefferson

- · Fully polished
- · 5° rotation
- · 15° offset













# **3 PIECE 4 IN 1 REVERSIBLE RATCHET SPANNER SET**

#### JEFRRSS03

- · Set includes sizes:
- 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19mm

· Complete with handy inner pouch and case cover











# 12 PIECE FLEXIBLE RATCHET **SPANNER SET**


#### JEFFHRRS12

- · Set includes sizes: 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19mm
- · Chrome Vanadium Steel
- · Mirror polished finish
- · Durable ratchet gears
- · 90 teeth
- · 5° rotation
- · Complete with heavy duty storage pouch











# **10 PIECE STUBBY RATCHET SPANNER SET**

#### JEFCRSS10STB

- · Set includes sizes:
- 10, 11, 12, 13, 14, 15, 16, 17, 18, 19mm
- · Chrome Vanadium Steel
- · Mirror polished finish
- · Durable ratchet gears
- · 72 teeth
- · 15° offset / 5° rotation
- · Complete with heavy duty storage pouch









# **12 PIECE REVERSIBLE RATCHET SPANNER SET**

#### JEFRRSS12B

- · Set includes sizes: 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19mm
- · Chrome Vanadium Steel
- · Mirror polished finish
- · Durable ratchet gears 90 teeth
- · 15° offset / 5° rotation
- · Complete with heavy duty storage pouch



CR-V





# **20 PIECE COMBINATION RATCHET SPANNER SET**

#### JEFCRSS20

- · Set includes sizes: 8, 9, 10, 11, 12, 13, 14, 15, 17, 18, 19, 21, 22, 24, 27, 30, 32mm
- · 3 x socket adaptors: 1/4", 3/8", 1/2"











# HEX & TORX KEY SETS

### **9 PIECE BALL-HEX KEY SET**

#### JEFKYHX09B

- · Metric Ball End
- · Long Handle
- · Folding Mechanism
- · Sizes include: 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10mm









# **9 PIECE EXTRA LONG BALL-HEX KEY METRIC SET**

#### JEFKYHX09ELB

- · Metric Ball End
- · Extra Long Handle
- · Sizes include:

1.5, 2, 2.5, 3, 4, 5, 6, 8, 10mm





# 8 PIECE FOLDING **TORX KEY SET**

#### JEFKYTX08F

- · Folding mechanism
- · Sizes include: T9, T10, T15, T20, T25, T27, T30, T40



CR-V



# 9 PIECE TORX KEY SET

#### JEFKYTX09

· Sizes include: T10. T15. T20. T25, T27, T30, T40, T45, T50



CR-V



PRICE EX.VAT

# 8 PIECE FOLDING **HEX KEY SET**

#### JEFKYHX08F-B

- · Folding Mechanism
- · Chrome Vanadium
- · Sizes include: 1.5, 2.0, 2.5, 3.0, 4.0. 5.0. 6.0. 8.0mm







#### **16 PIECE T-HANDLE HEX KEY SET**

#### JEFKYHXTX16T

- · Imperial Sizes Include: · Metric Sizes Include: T10 x 75mm H2 x 75mm T15 x 75mm H<sub>2</sub> 5 x 75mm T20 x 100mm H3 x 100mm H4 x 100mm T25 x 100mm
  - T30 x 150mm H5 x 150mm T40 x 150mm H6 x 150mm
  - T45 x 200mm H8 x 200mm T50 x 200mm H10 x 200mm











PRICE EX.VAT

# **13 PIECE JUMBO BALL-HEX KEY SET**

#### JEFKYHX13J

- · Manufactured from tempered Chrome Vanadium steel with mirror finish
- · Long handles with magnetic tip (featured on sizes 3mm and larger only)
- · Supplied in easy-access holder for portability and safe storage
- · Sizes include: 2mm (83 x 16mm) 2.5mm (90 x 18mm) 3mm (98 x 20mm) 4mm (106 x 24mm) 5mm (118 x 28mm) 6mm (137 x 32mm) 7mm (146 x 34mm) 8mm (156 x 36mm) 10mm (170 x 40mm) 12mm (207 x 45mm) 14mm (230 x 54mm) 17mm (250 x 61mm) 19mm (280 x 70mm)









# **30 PIECE HEX KEY SET**

#### JEFKYHX30

- · Imperial long handle
- · Metric short handle
- · Hex end
- · Chrome Vanadium
- · Imperial Sizes Include: 0.028", 0.035", 0.05", 1/6", 5/64", 3/32". 7/64". 1/8". 9/64". 5/32". 3/16", 7/32", 1/4", 5/16", 3/8"










- · Metric Sizes Include: 0.7mm, 0.9mm,
- 1.3mm, 1.5mm, 2.0mm, 2.5mm, 3.0mm, 4.0mm,
- 4.5mm, 5.0mm, 5.5mm, 6.0mm,
- 7.0mm, 8.0mm, 10mm



PRICE EX.VAT

# PICK & HOOK SETS

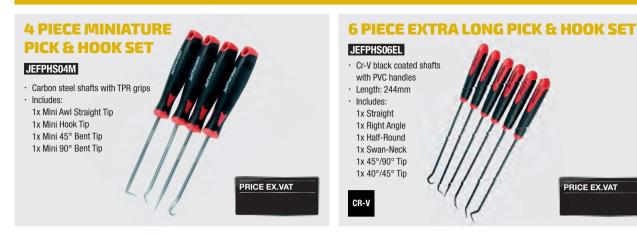

# TAP & DIE SETS

# **20 PIECE TAP & DIE SET**

#### JEFTAPDSAL20M

- · 9x Dies M3 M12
- · 9x Tap M3 M12
- · 1x Die stock M25
- · 1x Adjustable tap wrench M3-M12
- · Supplied in a protective plastic case





#### **40 PIECE TAP & DIE SET**

#### JEFTAPDSAL40M

- · 16x Dies M3 M12
- · 16x Taps M3 M12
- · 1x NPT Die 1/8-27
- · 1x NPT Tap 1/8-27
- · 1x Tap wrench
- 1x T-handle wrench
- 1x Screwdriver
- 1x Screw pitch gauge 1x Tap wrench 1x die holder (1" outer diameter)
- · 1x Protective blow moulded carry case
- · Manufactured from heat treated steel alloy
- $\boldsymbol{\cdot}$   $\,$  Ideal for cutting threads on mild steel and aluminium







# New

BOXES OF NITRILE GLOVES PAGE 194



# **45 PIECE METRIC TAP & DIE SET**

#### JEFTAPDSTU45M

- · Tungsten alloy
- · Metric coarse & fine sizes
- · Precision machined tungsten alloy steel taps and dies
- · Split dies to facilitate the fine adjustment of core diameter
- · Supplied in a heavy-duty carry-case
- · Taps & Dies:

6 x 1, 6 x 0.75, 8 x 1.25, 8 x 1, 10 x 1.25, 10 x 1.5, 12 x 1.5, 12 x 1.75, 14 x 1.5, 14 x 2, 16 x 1.5, 16 x 2, 18 x 1.5, 18 x 2.5, 20 x 1.5, 20 x 2.5, 22 x 1.5, 22 x 2.5, 24 x 1.5, 24 x 3mm

- · Sliding jaw type tap wrench and T-bar type tap wrench
- · Steel die holder with knurled screws
- Spacer
- · Screwdriver





**NEW!** 





· Precision machined · Sizes:

Machine:

#4-40, #6-32, #8-32, #10-24, #10-32, #12-24 Standard:

1/4-20, 1/4-28, 1/4-24, 1/4-40, 5/16-18, 5/16-24, 3/8-16, 3/8-24, 7/16-14, 7/16-20, 1/2-13, 1/2-20, 9/16-12, 9/16-18, 5/8-11, 5/8-18, 3/4-10, 3/4-16 Metric:

6 x 1.0, 8 x 1.25, 10 x 1.0, 10 x 1.5, 11 x 1.5, 12 x 1.25, 12 x 1.75, 14 x 1.25, 18 x 1.5

Pipe thread:

NPT 1/8-27, NPT 1/4-18







**NEW!** 

# **16 PIECE METRIC TAP & DRILL SET**

#### JEFTAPDRS16M

· High-quality alloy steel HSS steel bits

· Sizes:

M3 x 0.5mm

M3 x 0.7mm

M3 x 0.8mm M3 x 1.0mm

M3 x 1.25mm

M3 x 1.5mm

M3 x .75mm













# **REPAIR & EXTRACTOR KITS**

# THREAD REPAIR KIT

- · Protects tapped threads or stripped internal threads
- · Creates a stronger internal thread in soft metals
- · Includes:
- 1x Drill Bit
- 1x Thread Tap
- 1x Insert Installation
- 1x Breaking Tool



PRODUCT	DESCRIPTION	TAP THREAD LENGTH	TAP THREAD DIAMETER	DRILL BIT THREAD LENGTH	DRILL BIT DIAMETER	INSTALL TOOL SIZE	BRAKING Tool Size	PRICE EX. VAT
JEFTRKM05-08	Thread Repair Kit M5 x 0.8	25mm	6mm	50mm	5.2mm	4x135mm	4x100mm	
JEFTRKM06-10	Thread Repair Kit M6 x 1.0	25mm	8mm	65mm	6.2mm	4.5x135mm	4.5x100mm	
JEFTRKM08-125	Thread Repair Kit M8 x 1.25	25mm	10mm	75mm	8.3mm	6.5x135mm	6.5x100mm	
JEFTRKM10-150	Thread Repair Kit M10 x 1.50	30mm	12mm	95mm	10.3mm	7.5x135mm	7.5x100mm	4
JEFTRKM12-175	Thread Repair Kit M12 x 1.75	30mm	15mm	105mm	12.4mm	9.5x135mm	9.5x100mm	
JEFTRKM14-125	Thread Repair Kit M14 x 1,25	30mm	16mm	105mm	14.3mm	11x135mm	11x100mm	

### **THREAD INSERTS**



**NEW!** 



		- become also
PRODUCT	DESCRIPTION	PRICE Ex. Vat
JEFTIN-M0508	Thread Insert M5 x 0.8	
JEFTIN-M0610	Thread Insert M6 x 1.0	
JEFTIN-M08125	Thread Insert M8 x 1.25	
JEFTIN-M10150	Thread Insert M10 x 1.50	
JEFTIN-M12175	Thread Insert M12 x 1.75	
JEFTIN-M14125	Thread Insert M14 x 1.25	

# 25 PIECE MULTI SPLINE SCREW EXTRACTOR SET

#### JEFSCREX25

- · Manufactured from heat-treated Chrome Molybdenum steel
- · Reverse spiral design from maximum grip
- · Hex shaped head also supplied in a storage case
- · Designed to remove broken studs & bolts
- · suitable for high torque applications
- · Recommended dril bit size etched on each extractor
- · Supplied in a storage case

1/8"(3.2mm), 5/32"(4mm), 3/16"(4.8mm), 7/32"(5.5mm), 1/4"(6.3mm), 9/32"(7mm), 5/16"(8mm), 11/32"(8.7mm), 3/8"(9.5mm), 13/32"(10.3mm), 7/16"(11.5mm), 15/32"(12mm), 1/2"(13mm), 17/32"(14mm), 9/16"(14.5mm), 19/32"(15.5mm), 5/8"(16mm), 21/32"(17mm), 11/16"(18mm), 23/32"(18.5mm), 3/4"(19.5mm), 25/32"(20mm), 13/16"(21mm), 27/32"(22mm), 7/8"(23mm)





PRICE EX.VAT



### **6 PIECE ALLOY STEEL STUD EXTRACTOR**

### JEFSCREX06

Manufactured from hardened chrome steel for extra durability Sizes include:

- · 3-6mm
- · 6-8mm
- · 8-11mm
- · 11-14mm
- · 14-18mm · 18-22mm



PRICE EX.VAT

# **8 PIECE SCREW & STUD EXTRACTOR**

#### JEFSCREX08HD

Manufactured from heat treated Chrome Molybdenum steel. Rapid acting helix aids screw removal.

#### Sizes:

- · M3-M6
- · M6-M8
- M8-M11
- · M11-M14
- · M14-M18 · M18-M25
- · M25-M35
- · M35-M50





# **SCREWDRIVERS & SETS**

#### 15 PIECE PRECISION SCREWDRIVER SET

· 6x Torx©:

T5 x 25mm

#### JEFSDS15PR

#### Set includes:

- · 3x Slotted: 1.5 x 25mm 2.0 x 25mm 2.5 x 25mm
- · 3x Philips: PH00 x 25mm PH0 x 25mm PH1 x 25mm
- · 3x Hex: 2.0 x 25mm
  - 2.5 x 25mm 3.0 x 25mm
- T6 x 25mm T7 x 25mm T8 x 25mm T9 x 25mm T10 x 25mm







### 19 PIECE SCREWDRIVER SET

#### JEFSDSET19

- · Chrome Vanadium Steel blades
- · Comfort grips
- · Magnetic tips

#### Set includes:

- · 8x Slotted: 8x200mm 6x100mm 6x38mm 5x150mm 5x75mm
- 4x100mm 3x100mm 3x75mm
- 2x Torx: T20 x100mm T10x75mm
- · 6x Phillips: PH3x150mm
- PH2x38mm · PH2x100m PH1x75mm PH0x100mm PH0x75mm
- · 2x Pozi: PZ2 x 100mm PZ1 x 100mm
- · 1x Offset: 6mm slotted - PH2







# **INDIVIDUAL SCREWDRIVERS**





	PRODUCT	DESCRIPTION	PRICE Ex. Vat
1	JEFSRSL3-075	3.0 x 75mm Slotted Screwdriver	
	JEFSRSL5-075	5.0 x 75mm Slotted Screwdriver	
	JEFSRSL6-150	6.0 x 150mm Slotted Screwdriver	
	JEFSRPH0-075	PH0 x 75mm Phillips Screwdriver	
	JEFSRPH1-075	PH1 x 75mm Phillips Screwdriver	
	JEFSRPH2-100	PH2 x 100mm Phillips Screwdriver	
2	JEFSRPZ2-100	PZ2 x 100mm Pozi Screwdriver	

# INDIVIDUAL STRIKING CAP SCREWDRIVERS





PRODUCT	DESCRIPTION	PRICE Ex. Vat
JEFSRSL5-075ST	5.0 x 75mm Striking Cap Slotted Screwdriver	
JEFSRSL5-100ST	5.0 x 100mm Striking Cap Slotted Screwdriver	
1 JEFSRSL6-100ST	6.0 x 100mm Striking Cap Slotted Screwdriver	
JEFSRSL8-125ST	8.0 x 125mm Striking Cap Slotted Screwdriver	
2 JEFSRPH1-075ST	PH1 x 75mm Striking Cap Phillips Screwdriver	
JEFSRPH2-100ST	PH2 x 100mm Striking Cap Phillips Screwdriver	
3 JEFSRPZ2-100ST	PZ2 x 100mm Striking Cap Pozi Screwdriver	

# **INDIVIDUAL VDE SCREWDRIVERS**

- · Insulated to VDE standards
- · Chrome vanadium shafts
- · Tested and certified to BS EN IEC 60900
- Fully insulated to 1000V AC





PRODUCT	DESCRIPTION		
JEFSRSL25-075V	2.5 x 75mm VDE Slotted Screwdriver		
JEFSRSL55-125V	5.5 x 125mm VDE Slotted Screwdriver		
JEFSRSL65-150V	6.5 x 150mm VDE Slotted Screwdriver		
JEFSRPH0-060V	PH0 x 60mm VDE Phillips Screwdriver		
JEFSRPH1-080V	PH1 x 80mm VDE Phillips Screwdriver		
JEFSRPH2-100V	PH2 x 100mm VDE Phillips Screwdriver		
JEFSRPZ2-100V	PZ2 x 100mm VDE Pozi Screwdriver		
	JEFSRSL25-075V JEFSRSL55-125V JEFSRSL65-150V JEFSRPH0-060V JEFSRPH1-080V JEFSRPH2-100V	JEFSRSL25-075V  2.5 x 75mm VDE Slotted Screwdriver  JEFSRSL55-125V  5.5 x 125mm VDE Slotted Screwdriver  JEFSRSL65-150V  6.5 x 150mm VDE Slotted Screwdriver  JEFSRPH0-060V  PH0 x 60mm VDE Phillips Screwdriver  JEFSRPH1-080V  JEFSRPH2-100V  PH2 x 100mm VDE Phillips Screwdriver	

# **SINGLE POLE VOLTAGE TESTER**

# JEFSRSPVTR

- · Insulated to VDE standards
- · Tested and certified to BS EN IEC 60900
- · Fully insulated to 1000V AC





# **7 PIECE SCREWDRIVER SET**

#### JEFSDSET07

Set includes:

3 x 75mm

· 3x Slotted: 6 x 150mm 5 x 75mm

· 3x Phillips: PH2 x 100mm PH1 x 75mm PH0 x 75mm

· 1x Pozi: PZ2 x 100mm







# **7 PIECE HAMMER THROUGH SCREWDRIVER SET**

#### JEFSDSET07ST

Set includes:

· 4x Slotted: 8 x 125mm · 2x Phillips: PH1 x 75mm PH2 x 100mm

5 x 75mm · 1x Pozi: 5 x 100mm PZ2 x 100mm 6 x 100mm







### **8 PIECE VDE SCREWDRIVER SET**

#### JEFSDSET08V

- · Fitted with insulated, contoured, comfort grip handles
- · Fully insulated to 1000V AC Set includes:
- · 3 x Slotted:
- 1.2 x 6.5 x 150mm
- 1 x 5.5 x 125mm
- 0.4 x 2.5 x 75mm
- · 3 x Phillips:
- PH2 x 100mm
- PH1 x 80mm
- PHO x 60mm
- · 1 x Pozi: (PZ2 x 100mm)
- · 1 x Single-Pole Voltage Tester


















# TRUCK BOXES

### **SITE SAFE TRUCK BOXES**

- · Steel construction
- · Integrated forklift skids on 570mm, 700mm and 850mm models
- · 2 x shielded locking points
- · Pre-drilled fixing holes
- · Tough waterproof textured powder coating
- · UV Ray Protection

#### **400MM HIGH SITE SAFE TRUCK BOX**

#### JEFTB400







#### **570MM HIGH SITESAFE TRUCK BOX**





# **700MM HIGH SITESAFE TRUCK BOX**

#### JEFTB700



# **850MM HIGH SITESAFE TRUCK BOX**

# JEFTB850



INDUSTRIAL

### **AGRI SAFE TRUCK BOXES**


- · Steel construction
- · Integrated forklift skids
- · 2 x shielded locking points
- · Pre-drilled fixing holes
- · Tough waterproof textured powder coating
- · UV ray protection

#### **570MM HIGH AGRISAFE TRUCK BOX**

#### JEFASB570

- · Storage Capacity: 170 Litres
- · Dimensions: 915 x 440 x 570mm
- · Weight: 33.1kg





PRICE EX.VAT

### **700MM HIGH AGRISAFE TRUCK BOX**

#### JEFASB700

- · Storage Capacity: 420 Litres
- · Dimensions: 1220 x 610 x 704mm
- · Weight: 52.3kg







#### **5" RUBBER HEAVY DUTY CASTOR WHEEL SET**

### **JEFTBCASTSET**

- 5" Ball-bearing rubber castor set with grease nipples
- · 2 x swivel/braked wheel, 2 x fix wheels









# **HEAVY DUTY STORAGE**

#### **HEAVY-DUTY TOOL CHESTS**

- · Ideal for garage tool storage
- · Locking mechanism for added security
- · Ball bearing drawer sliders for smooth operation
- · Drawer liners and top mat included for tool and drawer protection



ALL DRAWERS HAVE ROLLER BEARINGS WHICH PROVIDE SMOOTH OPENING & CLOSING









# **4 DRAWER TOP CHEST**

#### JEFTBX04A

- · Maximum storage load: 90kg
- · Chest Dimensions: 660 x 307 x 377mm
- · Weight: 20kg





#### 6 DRAWER TOP CHEST

#### JEFTBX06A

- · Maximum storage load: 90kg
- · Chest Dimensions: 660 x 307 x 377mm
- · Weight: 22kg





#### **3 DRAWER MIDDLE CHEST**

#### JEFTBX03A

- · Maximum storage load: 70kg
- · Chest Dimensions: 669 x 315 x 267mm
- · Weight: 14.5kg





# 5 DRAWER MOBILE TOOL CHEST

# JEFTBX05A

- · Supplied with smooth running castors
- · Maximum storage load:
- · Chest Dimensions: 680 x 458 x 812mm
- · Weight: 44kg

# DRAWER DIMENSIONS

**Drawers 1, 2 & 3** 570 x 406 x 74.5mm **Drawers 4 & 5** 570 x 406 x 153.5mm

**4 X HEAVY DUTY** CASTOR WHEELS INCLUDED



# **7 DRAWER MOBILE TOOL CHEST**

#### JEFTBX07A

- · Supplied with smooth running castors
- · Maximum storage load:
- · Chest Dimensions: 680 x 458 x 995mm
- · Weight: 57.5kg

#### DRAWER DIMENSIONS

Drawers 1, 2, 3, 4 & 5 570 x 406 x 74.5mm **Drawers 6 & 7** 570 x 406 x 153.5mm

4 X HEAVY DUTY CASTOR WHEELS INCLUDED



### **TOOL CHEST KITS**

#### KIT-JEFTBX-01

- · Kit includes: JEFTBX03A JEFTBX04A JEFTBX05A
- · Supplied with smooth running castors
- · Kit Dimensions: 680 x 458 x 1450mm



#### KIT-JEFTBX-02

- · Kit includes: JEFTBX03A JEFTBX06A JEFTBX07A
- · Supplied with smooth running castors
- · Kit Dimensions: 680 x 458 x 1630mm



**NORMALLY** EX. VAT

# 7 DRAWER PROFESSIONAL TOOL CHEST WITH 146 TOOLS

· 1/2" dr. Sliding bar: 250mm

· Universal joint: 1/2", 1/4"

· 1/4" dr. sliding bar: 115mm

· Bit sockets:

Hex: 3, 4, 5, 6, 8

Slotted: 4, 5,5, 7

Torx: 8, 10, 15, 20

Phillips: 1, 2

Pozi: 1. 2

· 1/4" extension bar: 50-100mm

· Ratchet handle: 1/2" dr., 1/4" dr.

· 1/2" extension bar: 125-250mm

#### JEFTB202-146TK

NORMALLY

EX. VAT

# 1

- · 1/2" socket: 9, 10, 11, 12, 13, 14, 15, 17, 19, 20, 21, 22, 23, 24, 25, 27, 30, 32mm
- · 1/4" sockets: 4, 4.5, 5, 5.5, 6, 7, · Spinner handle: 1/4" 8, 9, 10, 11, 12, 13, 14mm
- · 1/4" deep sockets: 4, 5, 5.5, 6, 7. 8. 9. 10mm
- · 1/2" deep socket: 12, 13, 14, 15, 17, 19, 22mm
- · 1/2" E-socket; E10, E11, E12, F14 F16
- · 1/4" E-socket: E4. E5. E6. E7. E8
- · Spark plug socket: 16, 21mm

- · Machinist's hammer: 500g
- · Mallet: 40mm
- · Chisels: 3\*10\*150mm, 4\*10\*150mm, 5\*10\*150mm, 6\*10\*150mm, 3\*10\*150mm, 15\*12\*150mm, 21\*16\*200mm
- · Combination pliers: 8"
- · Diagonal cutting pliers: 7.5"
- · Long nose pliers: 8"
- · Water pump pliers: 10" D4

- · Pick up tool: 25"
- · Measuring Tape: 3m/10ft
- · Ruler: 300mm
- · Vernier caliper: 150mm
- · File: round, half round, square, triangle, flat
- · Circlip pliers: 6"













- · Combination wrenches: 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22mm
- · Ratchet combination wrenches: 8, 9, 10, 11, 12, 13, 14, 17, 19mm
- · Adjustable wrenches: 8"
- · T-handle hex key: 2\*100mm, 2.5\*100mm, 3\*100mm, 4\*150mm, 5\*150mm, 6\*150mm

### 3

· Screwdrivers: Slotted: 6\*38mm, 5\*75mm, 3\*75mm, 4\*100mm, 5\*100mm, 6\*125mm, 8\*150mm Phillips: 2\*38, 0\*75, 1\*100, 2\*100, 1\*125, 2\*150, 3\*150 Torx: T10\*75mm, T15\*75mm. T20\*100mm, T25\*125mm, T27\*150mm, T30\*150mm, T40\*200mm



**◎ □ f** in **% ♂** 



# JEFTB085-ME

- · JEFTB505 5 Tray Cantilever Toolbox
- · Accepts padlock for extra security
- · Carry handle
- · Heavy duty
- · 5 sections
- · Fold out design
- · Dimensions: 541 x 213 x 221mm



· 1x 1/2" Drive ratchet wrench




- · 1x Retractable safety knife
- · 10x Knife blades
- · 1x 6" Long nose pliers
- · 1x 6" Lineman pliers · 1x 9 piece hex key set
- Sizes: 1.5 10mm






- · 1x 10" Groove joint pliers
- · 1x 5m Tape measure
- · 1x Ball pein hammer
- · 11x Combination spanners including: 6, 7, 8, 10, 11, 12, 13, 14, 15, 17, 19mm



SL5x75mm, SL6x100mm, SL8x150mm, PH1x75mm, PH2x100mm · 12x 1/4" Drive sockets including:

4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13mm

- · 6x 1/4" Socket bits including: PH1, PH2, PZ1, PZ2, SL5.5, SL7
- · 1x 1/4" Drive extension bar: 4"
- · 2x 1/2" Drive extension bars including: 5", 10"
- · 1x 1/2" Drive universal joint
- · 1x 1/2" Drive 3-way adaptor
- · 1x 1/4" Drive extension spinner handle



PRICE EX.VAT

# **150 PIECE TOOL SET**

#### KIT-JEFTB-012

- · Complete tool chest set, fitted with EVA foam to hold tools safely in place
- · Set includes a wide range of essential hand tools from Jefferson Tools
- · JEFTBX06A 6 Drawer Top Chest Red
- · Maximum storage load: 70kg
- · Chest dimensions (W x H x D): 660 x 380 x 300mm



















- · 6" Diagonal Cutting Pliers
- 6" Long Nosed Pliers



52 Piece 1/4" Socket Set

- · 72 Tooth Ratchet Gear
- · 13 x 1/4"Dr. Socket including: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14mm
- · 7 x 1/4"Dr. Deep Socket including: 6, 7, 8, 10, 11, 12, 13mm
- 21 x 1/4"Dr. Bit Sockets including: T10, 15, 20, 25, 30, 40, H3, 4, 5, 6, 7, 8, PH1, 2, 3, PZ1, 2, 3, SL4, 5.5, 7
- 2 x 1/4"Dr. Extension Bar: 50mm & 100mm
- · 1 x 1/4"Dr. Spinner Handle
- · 1 x 1/4"DR. Universal Joint
- · 1 x 1/4"Dr. Bit Adaptor
- 1 x 1/4"DR. Flexible Extension bar 150mm
- 1 x 1/4"Dr. Ratchet Wrench 72T
- · 3 x Hex Key Wrench 1.5-2-2.5mm
- 1 x T-Sliding handles



- 9 Piece Ball-Hex Key Set including: 1.5mm, 2.0mm, 2.5mm, 3.0mm, 4.0mm, 5.0mm, 6.0mm, 8.0mm, 10.0mm
- · Digital Vernier Calipers



- · 8" Adjustable Wrench
- · High Vis Green Utility Knife
- · 12" Professional Hacksaw
- 10" Straight Jaw Vice Grips
- 5m Professional Measuring Tape
- · 32oz Ball Pein Hammer



- · 12 Combination Spanners
- Sizes include: 6, 7, 8, 9, 10, 11, 12, 13, 15, 17, 19, 22mm
- 10" Water Pump Pliers
- 7 Screwdrivers including:
- 3x Slotted: 6 x 150mm, 5 x 75mm, 3 x 75mm 3x Phillips: PH2 x 100mm, PH1 x 75mm, PH0 x 75mm
- 1x Pozi: PZ2 x 100mm



35 Piece 3/8" Socket Set

- · 1 x 72 Tooth Ratchet Gear
- · 17 x 3/8" Dr. Sockets: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24mm
- · 5 x 3/8" Deep Sockets: 8, 10, 13, 17, 19mm
- · 7 x Hex Dr. Sockets: 3, 4, 5, 6, 7, 8, 10mm
- · 2 x Spark Plug Sockets: 16, 24mm
- · 2 x 3/8" Dr. Extension Bar: 75mm, 250mm
- · 1 x 3/8" Dr. Sliding Head: 250mm
- · 2 x 3/8" Dr. Spark plug socket: 16mm, 21mm
- · 1 x 3/8" Dr. Universal Joint

24 Piece 1/2" Socket Set

- · 72 Tooth Ratchet Gear
- · 17 x 1/2"Dr. Socket including: 8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32mm
- · 2 x 1/2"Dr. Extension Bar: 75mm, 250mm
- · 1 x 1/2"Dr. Sliding head: 1/2" (M) x 3/8" (F)
- · 2 x 1/2"Dr. Spark plug socket: 16mm, 21mm
- · 1 x 1/2"Dr. Universal Joint
- · 1 x 1/2"Dr. Ratchet Wrench: 72T





# 7+3 DRAWER PROFESSIONAL TOOL CHEST

- · Anti-slip worktop mat
- · Centralised security locking system
- · Integrated ergomomic handle within the worktop
- · Full-extension ball bearing drawer slides
- · High strength aluminium alloy drawer pull
- · 4 x heavy duty castors roll smoothly over uneven surfaces and provide a 240kg loading rate
- · Dimensions:
- 3 drawer top: 675 x 465 x 335mm
- 7 drawer bottom: 675 x 465 x 950mm

AVAILABLE AS A STAND ALONE 7 + 3 DRAWER TOOL CHEST (JEFTB203), OR INCLUDING A FULL 173 PIECE TOOL KIT (JEFTB203-173TK). 173 PIECE TOOL KIT LISTED BELOW.

# **173 TOOLS INCLUDE:**



- 1/2" Socket: 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 23, 24, 27, 30, 32mm
- 1/4" Socket: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14mm
- 1/4" Deep Socket: 5, 6, 7, 8, 9, 10, 11, 12, 13mm
- · 25mm 1/4" Bit Socket: Torx: 8, 10, 15, 20, 25, 27, 30, 40 Phillips: 1, 2, 3 Pozi: 1, 2, 3 Slotted: 4, 5.5, 7
- Hex: 3, 4, 5, 6, 7, 8mm
   Spinner Handle: 1/4"
- · Universal joints: 1/2" & 1/4"
- Sliding bars: 1/2" & 1/4"
- · Ratchet handles: 1/2" & 1/4"
- · 1/2" Extension bar: 125 250mm
- · 1/4" Extension bar: 50-100mm



- Double Ring Wrenches: 6-7mm, 8-9mm,
   10-11mm, 12-13mm, 14-15mm, 16-17mm,
   18-19mm, 20-22mm
- · Combination wrenches: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22mm
- Hex Keys: 2\*100mm, 2.5\*100mm, 3\*100mm, 4\*150mm, 5\*150mm, 6\*150mm



- · Screwdriver: 16-21
- · Screwdriver: 8"
- Precision screwdriver: SL1.4-2-2.4-3; PH0, 00, 1"
- Screwdriver: 3x75, 4x100, 5.5x125, 6.5x150; PH1x100, PH2x100
- · Hex key: 2, 2.5, 3, 4, 5, 6, 8mm



- · Combination pliers: 8"
- · Long Nose Pliers: 8"
- · Diagonal Cutting Pliers: 7.5"
- · Lock Grip Pliers: 10"
- · Water Pump Pliers: 10"
- · Machinist's hammer: 500g
- · Mallet: 40mm



PROFESSIONAL 4













7 + 3 DRAWER PROFESSIONAL TOOL CHEST WITHOUT TOOLS

JEFTB203



7 + 3 DRAWER PROFESSIONAL TOOL CHEST WITH 173 TOOLS

JEFTB203-173TK





# INDUSTRIAL TOOL CHESTS

#### **INDUSTRIAL TOOL CHESTS**

- · Jefferson Industrial Tool Chests are powder coated for outstanding durability and rust resistance
- · Fitted with reliable locking mechanisms and come complete with two keys
- · All drawers include anti-slip liners to keep tools neat and tidy
- · Roller bearing function for smooth opening and closing
- · JEFTB41-8T top box features lockable cabinet doors

# 41" 8 DRAWER TOP **TOOL CHEST**

## JEFTB41-8T



# 41" 12 DRAWER TOP **TOOL CHEST**

#### JEFTB41-12T









ALL DRAWERS HAVE ROLLER BEARINGS WHICH PROVIDE SMOOTH OPENING & CLOSING

# **52" 10 DRAWER TOP TOOL CHEST**

#### JEFTB52-10T



# 41" SINGLE DRAWER MIDDLE TOOL CHEST

#### JEFTB41-1M





# **52" SINGLE DRAWER** MIDDLE TOOL CHEST

#### JEFTB52-1M



(LxBxH): 1300 x 440 x 170MM



# **41" 8 DRAWER BOTTOM MOBILE TOOL CHEST**

# JEFTB41-8B



PRICE EX.VAT

(LxBxH): 1130 x 465 x 990MM

# **41" 12 DRAWER BOTTOM MOBILE TOOL CHEST**

#### JEFTB41-12B



(LxBxH): 1130 x 465 x 990MM

PRICE EX.VAT

# **52" 13 DRAWER BOTTOM MOBILE TOOL CHEST**

# JEFTB52-13B



(LxBxH): 1385 x 465 x 990MM



# **COMPLETE INDUSTRIAL TOOL CHEST KITS**

### 41" TOOL CHEST KIT - OPTION 1

#### KIT-JEFTBBLK01

#### Includes:

- · JEFTB41-8T: 41" 8 Drawer Top Tool Chest
- · JEFTB41-1M: 41" Single Drawer Middle Tool Chest
- · JEFTB41-12B: 41" 12 Drawer Bottom Mobile Tool Chest



**NORMALLY** EX. VAT

### 41" TOOL CHEST KIT - OPTION 2

#### KIT-JEFTBBLK02

#### Includes:

- · JEFTB41-12T: 41" 12 Drawer Top Tool Chest
- · JEFTB41-1M: 41" Single Drawer Middle Tool Chest
- · JEFTB41-8B: 41" 8 Drawer Bottom Mobile Tool Chest



**NORMALLY** EX. VAT

# **52" TOOL CHEST KIT WITH SIDE LOCKER - OPTION 3** KIT-JEFTBBLK03

#### Includes:

EX. VAT

- · JEFTB52-10T: 52" 10 Drawer Top Tool Chest
- Middle Tool Chest
- JEFTB52-13B: 52" 13 Drawer **Bottom Mobile Tool Chest**
- · JEFTB16-8S: 8 Drawer Side Locker



# **8 DRAWER SIDE LOCKER**

### JEFTB16-8S





(LxBxH): 470 x 406 x 851MM

PRICE EX.VAT

# 12 DRAWER PROFESSIONAL **TOOL CHEST**

# NEW!

# **NEW!**

#### JEFTB42-12C

- · Max. Load (per drawer): 45kg
- · Heavy-duty castors -
- 2x swivel with brake, 2x fixed
- · Tough, rust-resistant powder coat finish
- · Soft close ball bearing drawer runners
- · 2x cable access grommets in top hatch
- · 2x cable access grommets in top hatch
- · 2x Gas strut top lid support
- · 3mm PVC drawer liners
- Dimensions: 1730 x 1150 x 550
- · Weight: 126kg

#### JEFTB56-14C

- · Max. Load (per drawer): 45kg
- · Heavy-duty castors -
- 2x swivel with brake, 2x fixed

**TOOL CHEST** 

- · Tough, rust-resistant powder coat finish · Dimensions: · Soft close ball bearing drawer runners
- · 2x cable access grommets in top hatch
- · 2x Gas strut top lid support
- · 3mm PVC drawer liners
- 2090 x 1520 x 655
- · 2x cable access grommets in top hatch · Weight: 200kg

**14 DRAWER PROFESSIONAL** 

















# **5 DRAWER PROFESSIONAL WORK STATION**

#### JEFTB46-5WS

- · Max. Load (per drawer): 45kg
- · Heavy-duty castors -
  - 2x swivel with brake, 2x fixed
- · Tough, rust-resistant powder coat finish
- · Ball bearing drawer runners
- · 3mm PVC drawer liners
- · Soft close ball bearing drawer runners
- · Dimensions:
- 1235 x 840 x 525
- · Weight: 70.5kg













**NEW!** 

**NEW!** 

# **MODULAR STORAGE SYSTEM COMBO**

# PRODUCT SPOTLIGHT

## JEFMSSCOMBO-01

- · Modular storage system with wooden work bench
- · Welded construction with powder coated finish
- · Lockable units
- · Partial self-assembly required
- · LEDs to illuminate worktop
- · Overall dimensions (LxBxH): 2594 x 457mm x 1845
- · Supplied with brackets

#### Includes:

- · Large Shelving Unit (3 Shelves); Dimensions: 762 x 457 x 1845mm; Max. Capacity Per Shelf: 40kg
- · Small Shelving Unit (1 Shelf); Dimensions: 608 x 432 x 836mm; Max. Capacity Per Shelf: 40kg
- · Horizontal Shelving Unit (3 Units); Dimensions: 1830 x 306 x 338mm; Max. Capacity Per Shelf: 8kg
- · Drawer Unit; Dimensions: 608 x 432 x 836mm; Drawer 1: 498 x 345 x 63mm; Drawers 2 & 3: 498 x 345 x 154mm; Drawer 4: 498 x 345 x 200mm
- Work Bench



**GAS STRUTS ON LIFT-UP DOORS** 





FULLY ADJUSTABLE SHELF HEIGHT



PANEL WITH LEDS TO ILLUMINATE WORKTOP







PRICE EX. VAT

# **HEAVY DUTY WORKSHOP TROLLEY**

# **NEW!**

# **NEW!**

#### JEFTTROL01

- · Highly useful in garages or workshops
- · 3 levels 50kg capacity each
- · Tray Depth: 3.5" / 89mm
- · 4x rubber castor wheels (2 lockable & 2 fixed)
- · Soft close ball bearing drawer runners
- · Max. Capacity: 150kg
- Weight: 23kg
- Dimensions:
- 762 x 406 x 825mm

PRICE EX.VAT

#### JEFTTROL02

- · Compact and eaisly manoeuvrable
- · Highly useful in garages or workshops
- · Equipped with two high-walled shelves 4x castor wheels (2 lockable & 2 fixed)

**HEAVY DUTY 2-LEVEL TROLLEY** 

WITH LOCKABLE DRAWER

- · Max. Capacity: 75kg
- · Weight: 20.4kg · Dimensions: 900 x 410 x 760mm



# **MOBILE TOOL & PARTS TROLLEY WITH SLIDING LID & DRAWERS**

#### JEFTTROL03

MAX 150KG

- · Lockable sliding top on smooth ball bearings · Weight: 27kg
- · 4x castor wheels (2 lockable & 2 fixed)
- · Soft close ball bearing drawer runners
- · Max. Capacity: 158kg
- · Dimensions:
- 838 x 355 x 787mm

(700mm unopened)



# **HEAVY DUTY MOBILE TOOL & PARTS TROLLEY**

# **NEW!**

#### JEFTTROL04

- · 5x drawers are lined with non-slip liners · Soft close ball bearing
- · Lined lower shlef ideal for larger parts
- · Side shelf for tools, spray tins & parts
- · Features rear-locking mechanism · 4x castor wheels (2 lockable & 2 fixed)
- drawer runners Max. Capacity: 300kg
  - Weight: 64kg
- · Dimensions: 1050 x 515 x 940mm



# ADJUSTABLE WORK TABLE C/W X1 DRAWER

#### JEFTBL05-01

- · Highly useful in garages or workshops
- · Adjusts from 791mm to 1016mm
- · 30mm hard-wearing rubber wood worktop
- · 17-18 gauge heavy-duty steel legs
- · Max. 30kg load drawer capacity
- · Soft close ball bearing drawer runners











**NEW!** 



# STORAGE CASES & RUCKSACK

### 12 COMPARTMENT STACKABLE STORAGE CASE

#### JEFSTOCS12

- Hard plastic case with twelve plastic removable bins
- · Fitted plastic handle
- · Metal twin-toggle locking catches
- Ideal for storing a mixture of small and large fixings and components etc.
- $\boldsymbol{\cdot}$   $\,$  Ideal for trade professional and DIY use
- · Case Dimensions (W x D x H): 444 x 105 x 357mm
  - Bin Dimensions (x12) (W x D x H): 80 x 92 x 110mm



### **TOOL RUCKSACK**

#### JEFBAGT01

- Strong and durable 1680D material
- Four zipped compartments
- Internal pen/notepad holders and laptop compartment



# **15 COMPARTMENT METAL STORAGE CASE**

#### JEFSTOCM15

- · Tough and durable metal case with fifteen plastic removable bins
- · Fitted with a sturdy swing type handle
- · Twin-toggle locking catches and one safety catch provide added security
- · Ideal for storing a mixture of small and large fixings and components etc.
- · Case Dimensions (W x D x H): 388 x 280 x 67mm

#### Includes:

- · 9 x Small Bins (Orange); Dimensions: 53 x 53 x 61mm;
- · 1 x Medium Bins (Yellow); Dimensions: 106 x 53 x 61mm;
- · 4 x Large Bins (Blue); Dimensions: 106 x 106 x 61mm;
- · 4 x Large Bins (Red); Dimensions: 215 x 105 x 61mm;







### **DOUBLE SIDED 29 COMPARTMENT STORAGE CASE**

#### JEFSTOCDS29

- · Plastic double side organiser
- · Polypropylene body with a clear polycarbonate lid
- · Case Dimensions: 375 x 320 x 120mm
- · Weight: 2kg

#### Includes:

- · 8 x Removable Bins; Dimensions: 120 x 90 x 55mm;
- · 2 x Large Compartments; Dimensions: 100 x 92 x 55mm
- 15 x Medium Compartments; Dimensions: 72 x 72 x 55mm;
- · 4 x Small Compartments; Dimensions: 30 x 92 x 55mm







#### **5 TRAY CANTILEVER TOOL BOX**

#### JEFTB505

- · Steel box
- · Accepts padlock for extra security
- · Carry handle
- · Heavy duty
- · 5 sections
- $\cdot \ \, \text{Fold out design}$
- · Dimensions: 541 x 213 x 221mm











# **STORAGE BINS**

# 16 PIECE BENCH TOP STORAGE BIN SYSTEM

#### JEFBIN16TB

- Magnetic top bar tool holder with 5kg capacity
- · Heavy Duty frame
- Multi-functional and easy to assemble
- · Dimensions: 715 x 645 x 227mm
- · Overall Capacity: 25kg



#### Includes:

- 12x Small Bins (Red); Dimensions: 163 x 104 x 74mm; Capacity: 1kg
- 4 x Large Bins (Blue); Dimensions: 230 x 148 x 125mm; Capacity: 2kg





# 44 PIECE WALL MOUNTED STORAGE BIN SYSTEM

#### JEFBIN44WL

- Two back panels let you organise the bins and accessories to suit your individual needs. Bins are stackable and can be used independently
- · Dimensions: 540 x 960 x 220mm
- · Overall Capacity: 36kg

#### Includes:

- 16 x Small Bins (Red); Dimensions: 117 x 103 x 71mm; Capacity: 1kg
- 8 x Medium Bins (Yellow);
   Dimensions: 163 x 103 x 72mm;
   Capacity: 1.5kg
- 4 x Large Bins (Blue);
   Dimensions: 213 x 103 x 72mm;
   Capacity: 2kg
- · 14 x Tool Storage Accessories
- · 2 x Mount Panels







# 47 PIECE FREE STANDING STORAGE BIN SYSTEM

# JEFBIN47FS

- Single sided free-standing designcan be positioned against a wall to maximise available floor space
   Complete with a top tray with 8kg
- capacity for extra storage

  Heavy duty metal frame with
- black powder coated finish
  Dimensions: 1130 x 950 x
- 335mm
   Overall Capacity: 70kg



REINFORCEMENT

#### Includes:

- 32 x Small Bins (Red);
   Dimensions: 163 x 104 x 74mm;
   Capacity: 1kg
- 15 x Large Bins (Blue);
   Dimensions: 230 x 148 x 125mm;
   Capacity: 2kg



# 94 PIECE MOBILE STORAGE BIN SYSTEM

#### JEFBIN94WHL

- Two-sided design facilitates split work areas or dividing types of parts
- Complete with a top tray (8kg capacity) and bottom tray (15kg capacity) for extra storage
- Mounted on four swivel wheels with two lockable wheels
- · Dimensions: 1220 x 905 x 535mm
- · Overall Capacity: 147kg



#### Includes:

- 64 x Small Bins (Red); Dimensions: 163 x 104 x 74mm; Capacity: 1kg
- 30 x Large Bin (Blue); Dimensions: 230 x 148 x 125mm; Capacity: 2kg














# INDUSTRIAL LIFTING

## **POWER HOISTS (230V)**

- · Compact, general purpose electric power hoist
- · Ideal for all manner of lifting work
- · Strong Ø3mm x 12M twist-free cable
- Easy to install & supplied with fixing clamps for fitting the hoist on square box section beams
- · Includes remote control for convenient operation
- · Approved and tested to EU and UK Lifting Gear Regulations
- · Ingress Protection: IP54



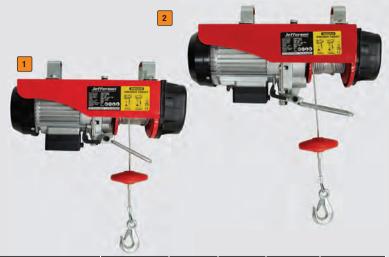



	PRODUCT	DESCRIPTION	LOAD CAPACITY	LIFT HEIGHT	MOTOR POWER	WEIGHT	PRICE Ex. Vat
1	JEFPOWH250	250kg Power Hoist 230V	125kg / 250kg	12m / 6m	540W	11kg	
2	JEFPOWH400	400kg Power Hoist 230V	200kg / 400kg	12m / 6m	950W	17kg	



# **TUNDRA MAGNETIC LIFTERS**

These magnetic lifters are designed to lift a variety of loads including steel, iron, round and other magnetic materials. The equipment eliminates the need for clamps, slings and chains allowing for increased working efficiency in busy garages and workshops. This equipment does not require a power source.





	PRODUCT	DESCRIPTION	CAPACITY	MAX LOAD (ROUND STEEL)	MAX LOAD (FLAT STEEL)	MAX BREAKAWAY FORCE	DIMENSIONS	WEIGHT	PRICE EX. VAT	A 10/2/2018
	TUNMAGL0100	Tundra 100kg Magnetic Lifter	100kg	50kg	100kg	350kg	92 x 64 x 72mm	3.2kg		元
	TUNMAGL0300	Tundra 300kg Magnetic Lifter	300kg	135kg	300kg	1050kg	162 x 91 x 89mm	10kg		
	TUNMAGL0600	Tundra 600kg Magnetic Lifter	600kg	300kg	600kg	2100kg	231 x 121 x 116mm	24kg		
1	TUNMAGL1000	Tundra 1000kg Magnetic Lifter	1000kg	500kg	1000kg	3500kg	260 x 150 x 158mm	50kg		
					P 000 100	A STATE OF THE PARTY OF	The Market State of the State o	Vol. The Till	A STATE OF THE PARTY OF THE PAR	

#### **TUNDRA CHAIN BLOCKS**

This equipment has been designed for vertically lifting and lowering loads by hand, under normal atmospheric conditions in a safe working environment.

- · Heavy duty lifting capacity
- · Fitted with heat treated and ground, triple-spur geared shaft and pinion
- · Also includes mechanical load brake for extra safety
- · All chains are manufactured from hardened alloy material and load hooks feature safety latches
- · Compact gear housing allows use where headroom is limited
- · Standard lift: 3m



## INDUSI

PRODUCT	DESCRIPTION	CAPACITY	PRICE EX. VAT
TUNCB0.5-3	Tundra 0.5 Tonne Chain Block	500kg	
TUNCB1.0-3	Tundra 1 Tonne Chain Block	1000kg	
TUNCB1.5-3	Tundra 1.5 Tonne Chain Block	1500kg	
TUNCB2.0-3	Tundra 2 Tonne Chain Block	2000kg	
TUNCB3.0-3	Tundra 3 Tonne Chain Block	3000kg	

## **TUNDRA LEVER BLOCKS**

This equipment has been designed for vertically lifting and lowering loads by hand, in a safe working environment.

- · Heavy duty Lever block with 3.0m standard lifting capacity
- · Fitted with heat treated and ground, triple-spur geared shaft and pinion
- · Also includes mechanical load brake for extra safety
- · All chains are manufactured from hardened alloy material and load hooks feature safety latches
- · Compact gear housing allows use where headroom is limited
- · Standard lift: 3m

#### INDUSTRIAL

PRODUCT	DESCRIPTION	CAPACITY	PRICE EX. VAT
TUNLB0.75-3	Tundra 0.75 Tonne Lever Block	750kg	
TUNLB1.50-3	Tundra 1.5 Tonne Lever Block	1500kg	
TUNLB3.00-3	Tundra 3 Tonne Lever Block	3000kg	
TUNLB6.00-3	Tundra 6 Tonne Lever Block	6000kg	



#### TUNDRA LOW HEIGHT HYDRAULIC CYLINDERS

- · Fitted with stopping ring, this protects the cylinder when the piston comes to a stop because it absorbs the weight from the other side
- · Spring loaded piston which allows for quick release
- · Chrome plated cylinder wall and primary piston to prevent corrosion and reduce friction

#### R2 3/8"CONNECTION











**HYDRAULIC** CYLINDERS PROVIDE A RELIABLE DEVICE FOR SAFELY LIFTING LARGE STRUCTURES

PRODUCT	DESCRIPTION	STROKE	CLOSED HEIGHT	EXTENDED HEIGHT	LENGTH X WIDTH	INSIDE DIAMETER	PISTON ROD DIAMETER	NET WEIGHT	PRICE EX. VAT
TUNHYDCY30-13L	Tundra 13mm 30 Tonne	13mm	62mm	75mm	123mm x 98mm	75mm	64mm	4.6kg	
TUNHYDCY50-16L	Tundra 16mm 50 Tonne	16mm	72mm	88mm	148mm x 120mm	95mm	70mm	7.8kg	
TUNHYDCY100-16L	Tundra 16mm 100 Tonne	16mm	91mm	107mm	188mm x 160mm	135mm	100mm	16.8kg	

COMPATIBLE WITH TUNHNDPMP,

#### **TUNDRA LOW HEIGHT MULTI-STAGE HYDRAULIC CYLINDERS**

- Lightweight, low-profile design for use in confined spaces
- Baked enamel finish for increased corrosion resistance
- · Easy to transport



TUNHNDPMP-700A & TUNHNDPMP-A
HYDRAULIC HAND PUMPS

R2 3/8"CONNECTION

30 TONNE

INDUSTRIAL

TUNDRA® HYDRAULIC CYLINDERS ARE IDEAL FOR LIFTING LARGE STRUCTURES IN CONFINED SPACES

	PRODUCT	DESCRIPTION	STROKE	CLOSED HEIGHT	EXTENDED HEIGHT	LENGTH X WIDTH	NET WEIGHT	PRICE EX. VAT
1	TUNHYDCY30-54M	Tundra 30 Tonne Multi-Stage	54mm	64mm	118mm	123mm x 98mm	4.7kg	
	TUNHYDCY50-69M	Tundra 50 Tonne Multi-Stage	66mm	74mm	140mm	148mm x 120mm	7.9kg	

#### **TUNDRA LARGE STROKE HYDRAULIC CYLINDERS**

- Fitted with stopping ring, this protects the cylinder when the piston comes to a stop because it absorbs the weight from the other side
- · Spring loaded piston which allows for quick release
- Fitted with 0-ring for outstanding seal performance and a long service life
- TUNHYDCY30-100 & TUNHYDCY30-150 compatible with TUNHNDPMP-700A & TUNHNDPMP-A Tundra Hydraulic Hand Pumps
- TUNHYDCY100-100 compatible with TUNHNDPMP, TUNHNDPMP-700A & TUNHNDPMP-A Tundra Hydraulic Hand Pumps





INDUSTRIAL

30 TONNE



R2 3/8"CONNECTION

	PRODUCT	DESCRIPTION	STROKE	CLOSED HEIGHT	EXTENDED HEIGHT	OUTSIDE DIAMETER		PISTON ROD DIAMETER	NET WEIGHT	PRICE EX. VAT
3	TUNHYDCY30-100	Tundra 30 Tonne Hydraulic Cylinder	100mm	187mm	287mm	103mm	75mm	65mm	10.7kg	
1	TUNHYDCY30-150	Tundra 30 Tonne Hydraulic Cylinder	150mm	237mm	387mm	103mm	75mm	65mm	13.5kg	
2	TUNHYDCY100-100	Tundra 100 Tonne Hydraulic Cylinder	100mm	232mm	332mm	168mm	135mm	90mm	30.6kg	

# TUNDRA 30 TONNE HIGH CAPACITY HOLLOW PLUNGER HYDRAULIC CYLINDER

#### TUNHYDCY30-150HW

- $\cdot\,$  Hollow plunger design allows for both push & pull forces
- · Single-acting, with hydraulic advance and spring return
- · Manufactured from high-strength, durable alloy steel
- · Anti-corrosive baked enamel finish
- · With R2 3/8" Male quick connector and protective dust cap
- · Stroke: 150mm
- · Effective area: 47.7cm<sup>2</sup>
- · Closed Height: 312mm
- · Extended Height: 462mm
- · Outside Diameter: 114mm
- · Inside Diameter: 90mm
- · Piston rod Diameter: 63mm
- · Piston Rod Bore: 33mm
- · Hose connection: 3/8"
- · Weight: 20kg



COMPATIBLE WITH
TUNHNDPMP-700A & TUNHNDPMP-A
HYDRAULIC HAND PUMPS

HOLLOW PLUNGER
DESIGN



INDUSTRIAL

PRICE EX.VAT

3/8" MALE QUICK

CONNECTOR

# TRESTLE

#### **TELESCOPIC TRESTLE**

#### **JEFTRESTEL**

- · Heavy-duty adjustable steel work trestle
- · Telescopic action with height-adjusting locking bars
- Dual-locking safety arms & folding support braces for rigidity when working
- · Adjustable height: 810mm 1310mm
- · Folds down for safe, compact storage
- · Manufactured from tough & durable box section steel
- · Sold individually

SOLD AS SINGLE UNITS







# HEAVY LOAD TRANSPORT

#### **DOUBLE CYLINDER TROLLEY**

#### JEFCYLTRL08-D

- Perfect for moving cylinders around job sites
- Durable steel rimmed wheels with roller bearings and solid rubber tyres
- Includes safety chain for securely holding cylinders
- Maximum Cylinder Diameter: 240mm
- Dimensions (h x w):
- 1040mm x 470mm
   Middle Bar Height: 740mm





# DOUBLE CYLINDER TROLLEY (3 WHEELED)

#### JEFCYLTRL14-D3

 Three wheels for extra stability and safety while moving cylinders around job sites

 Strong, durable steel rimmed wheels with roller bearings and solid rubber tyres

- Includes safety chain for securely holding cylinders
- Supplied with lockable storage box
- Maximum Cylinder Diameter: 315mm
- · Dimensions (h x w): 1115mm x 635mm
- · Middle Bar Height: 863mm







# DOUBLE CYLINDER TROLLEY (SINGLE HANDLE)

#### JEFCYLTRL06-D

- Perfect for moving cylinders around job sites
- Durable steel rimmed wheels with roller bearings and solid rubber tyres
- Includes safety chain for securely holding cylinders
- Maximum Cylinder Diameter: 190mm
- Dimensions (h x w): 1040mm x 400mm
- · Middle Bar Height: 495mm





## **SINGLE CYLINDER TROLLEY**

#### JEFCYLTRL08-S

- Perfect for moving cylinders around job sites
- Durable steel rimmed wheels with roller bearings and solid rubber tyres
- Includes safety chains for securely holding cylinders
- Maximum Cylinder Diameter: 215mm
- · Dimensions (h x w): 1115mm x 255mm
- · Middle Bar Height: 800mm















#### HAND TRUCK SPARE WHEELS



	PRODUCT	DESCRIPTION	PRICE Ex. Vat
1	JEFWHEEL1805	Spare Wheel for JEF1805	
2	JEFWHEEL1805-S	Solid Spare Wheel for JEF1805	
3	JEFWHEEL1805-PUY	Puncture Proof Wheel for JEF1805/1806	



	PRODUCT	DESCRIPTION	PRICE Ex. Vat
4	JEFWHEEL1823	Spare Wheel for JEF1823	
5	JEFWHEEL1823-S	Solid Spare Wheel for JEF1823	
6	JEFWHEEL1823-PUY	Puncture Proof Wheel for JEF1823	

#### **PUNCTURE PROOF WHEELBARROW WHEEL**

## JEFWHLBARW-Y

- · Puncture proof wheel for various wheelbarrows
- · Includes steel axle and two plastic caps
- · Diameter: 395mm
- · Width: 90mm







# **2 TONNE PALLET TRUCK** JEFPT1 · Suitable for a broad range of material handling applications, including horizontal transport, order picking, loading / unloading and stacking · Designed for ease of use, our long-lasting truck allows for the safe and efficient movement of goods with very little effort · Provides lift heights up to 190mm · Fitted with heavy-duty double wheel solid castors · Fork Width: 150mm · Fork Spacing: 130mm · Fork Length: 1150mm · Max. Lift: 2000kg · Max. Load: 2 Tonne · Max. Lift Height: 190mm

# TUNDRA 8 TONNE MACHINE MOVING SKATES

PUMP CONTROL HANDLE ALLOWS 3 FUNCTIONS: LOWER, NEUTRAL, LIFT

#### TUNCT08

- 1 x 4 Tonne steering skate with turntable allowing directional changes during movement
- $\cdot$  2 x 2 Tonne trailing skates
- · All skate systems are standard equipped with a steering bar and alignment bar
- Polyurethane wheels giving a long life and reduced risk of any damage to your floor
- · Max capacity: 8 tonne as a set



INDUSTRIAL



**DOUBLE WHEEL SOLID CASTORS** 

# TUNDRA 16 TONNE MACHINE MOVING SKATES

#### TUNCT16

- 1 x 8 Tonne steering skate with turntable allowing directional changes during movement
- · 2 x 4 Tonne trailing skates
- · All skate systems are standard equipped with a steering bar and alignment bar
- · Pulling / Towing eye
- · Anti-slip rubber pads
- Polyurethane wheels giving a long life and reduced risk of any damage to your floor
- · Max capacity: 16 Tonne as a set



INDUSTRIAL



PRICE EX.VAT

#### **WELDING TROLLEY CART**

#### JEF4222C

The Jefferson Welding Trolley is the perfect all in one solution for the modern workshop. Manufactured from durable yet light steel, it delivers exceptional performance and mobility. Keep your welding equipment neat and tidy and most importantly safe with this essential product. It features space at the rear for one tank of gas and safety chains to keep it secure.

- · Load Capacity: 80kg
- · Wheels: 7.5" / 3" solid wheels
- · Dimensions (LxBxH): 705mm x 375mm x 692mm







#### **TUNDRA LIFT TABLES**

Heavy-duty construction. Fitted with two fixed and two swivel composite wheels for easy rolling over rough workshop and warehouse floors.

- · Swivel wheels fitted with foot-operated brake
- · One-piece hydraulic unit controlled by large rear mounted foot pedal
- · Safety release mechanism positioned on handlebar for smooth controlled descent
- · Both models feature safety bars to prevent inadvertent lowering
- · Suitable for numerous garage, industrial and warehouse handling
- · Supplied with non-slip platform cover for added load security
- · May also be used as a mobile service bench









	PRODUCT	DESCRIPTION	MAX. LOAD	MIN HEIGHT	MAX HEIGHT	TABLE SIZE	WEIGHT	PRICE Ex. Vat
1	TUNLFTAB300	Tundra 300kg Lift Table	300kg	270mm	760mm	810 x 500mm	61kg	
2	TUNLFTAB500	Tundra 500kg Lift Table	500kg	280mm	860mm	815 x 500mm	79kg	



#### **TUNDRA ADJUSTABLE GREASE DRUM TROLLEY**

## TUNHNDTRL20A

- · Ideal for transporting oil/grease barrels
- · Steel construction with heavy duty wheels for use in rigorous work environments
- · Adjustable drum height locking clamp and base knobs for holding drums of varying diameters
- · Ideal for 20 litre, 5 gallon to 60 litre and 16 gallon drums







# **WORKSHOP HAND TROLLEY**

#### JEF4101C

- · Constructed from light yet durable metal
- · Dimensions (LxWxH): 750 x 450 x 775mm




# STRAPS & SLINGS

#### **BLUE RATCHET STRAPS**

Manufactured according to European Standard EN 12195-2:2001, Jefferson ratchet straps are all fitted with a double J hook for added durability and provide superior support and safety when transporting goods.

- · High quality ratcheting tie down straps
- Made from high-strength 100% Polyester Webbing
- Ideal for securing and binding oversized and difficult loads
- Automatic lock ratcheting action with easy release
- · Fitted with double J Hooks
- Provides lashing capacity up to 2000 daN (breaking force 4000 daN)
- Manufactured and tested to EN 12195-2 with TUV & GS Certification



	PRODUCT	DESCRIPTION	LASHING CAPACITY	COMBINED Lashing Capacity	PRICE EX. VAT
1	JEFRS05M	5m x 25mm Blue Ratchet Strap	Ratchet: 400daN Strap: 400daN	800daN	
	JEFRS08M	8m x 50mm Blue Ratchet Strap	Ratchet: 2000daN Strap: 2000daN	4000daN	
	JEFRS10M	10m x 50mm Blue Ratchet Strap	Ratchet: 2000daN Strap: 2000daN	4000daN	
2	JEFRS12M	12m x 50mm Blue Ratchet Strap	Ratchet: 2000daN Strap: 2000daN	4000daN	

# 3.5M X 25MM ORANGE RATCHET STRAP SET (2 PACK)

#### JEFRS03.5-02

- · High quality ratcheting tie down straps
- Made from high-strength 100% Polyester Webbing
- · Ideal for securing and binding oversized and difficult loads
- Automatic lock ratcheting action with easy release
- · Fitted with double J Hooks
- Manufactured and tested to EN 12195-2 with TUV & GS Certification



PRICE EX.VAT

## 5M X 25MM ORANGE RATCHET STRAP SET (4 PACK)

#### JEFRS05.0-04

- · High quality ratcheting tie down straps
- Made from high-strength 100% Polyester Webbing
- Ideal for securing and binding oversized and difficult loads
- Automatic lock ratcheting action with easy release
- · Fitted with double J Hooks
- Manufactured and tested to EN 12195-2 with TUV & GS Certification



EN 12195-2:2001



#### 4.5M X 25MM RATCHET TIE DOWN STRAPS (2 PACK)

#### JEFRS04.5-02

EN 12195-2:2001

- Lashing capacity: Ratchet: 350daN Strap: 350daN
- · Combined lashing capacity: 700daN



EN 12195-2:2001

PRICE EX.VAT

**NEW!** 

## **TARPAULINS**

- · 140gsm polyethylene weave with reinforced corners
- · UV treated
- · Tear-proof, waterproof, mould- and mildew-proofed
- · Aluminium eyelets set at metre intervals
- · Edges heat treated and reinforced with cord in the hem
- · All corners strengthened with heavy-duty plastic





REINFORCED CORNERS

PRODUCT	DESCRIPTION	PRICE Ex. Vat
JEFTARP3-2	3m x 2m Tarpaulin	
JEFTARP4-3	4m x 3m Tarpaulin	
JEFTARP5-4	5m x 4m Tarpaulin	
JEFTARP5-8	NEW! 5m x 8m Tarpaulin	
JEFTARP7-6	NEW! 7m x 6m Tarpaulin	
JEFTARP9-14	NEW! 9m x 14m Tarpaulin	

#### **2 PIECE HEAVY DUTY ELASTIC STRAPS**

- · Manufactured from virgin rubber with plastic coated steel hooks
- · Lashing capacity 20kg
- · Ideal for securing loads to vans and trucks



PRODUCT	DESCRIPTION	PRICE EX. VAT
JEFES450-02	450mm Elastic Strap	
JEFES600-02	600mm Elastic Strap	
JEFES800-02	800mm Elastic Strap	

## **10 PIECE ASSORTED ELASTIC STRAPS**

#### JEFESMIX-10

- · High quality rubber bungee cords with coated steel hooks
- · TUV/GS Tested & Approved
- · 4x Ø4mm x 250mm
- · 2x Ø8mm x 600mm · 2x Ø8mm x 800mm
- · 2x Ø8mm x 1000mm





# **20 PIECE ASSORTED ELASTIC STRAPS**

#### JEFESMIX-20

- · High quality rubber bungee cords with coated steel hooks
- TUV/GS Tested & Approved
- · 4x Ø4mm x 250mm
- · 4x Ø8mm x 500mm
- · 4x Ø8mm x 750mm
- · 4x Ø8mm x 455mm
- · 4x Ø8mm x 600mm



PRICE EX.VAT

## **CARGO NET (12 HOOKS) 75CM X 75CM**

#### JEFCN75-75

- · Safely secures vehicle loads whilst in transit
- · 75cm by 75cm-elasticated rubber net
- · Complete with 12 plastic hooks
- · Suitable for trade and domestic use



## **LOAD SLINGS**

- · Reinforced flat double eye
- · 100% High tenacity polyester
- · Low elongation and 7:1 safety factor
- · Manufactured and certified to EN4192-1
- · Colour coded to identify capacity in accordance with European standards



# **1TONNE (PURPLE)**





PRODUCT	DESCRIPTION	LENGTH	PRICE EX. VAT
JEFLSL0101P	1 Tonne 1m Load Sling (Purple)	1m	
JEFLSL0102P	1 Tonne 2m Load Sling (Purple)	2m	
JEFLSL0103P	1 Tonne 3m Load Sling (Purple)	3m	

## **2 TONNE (GREEN)**



PRODUCT	DESCRIPTION	LENGTH	PRICE EX. VAT
JEFLSL0201G	2 Tonne 1m Load Sling (Green)	1m	
JEFLSL0202G	2 Tonne 2m Load Sling (Green)	2m	
JEFLSL0203G	2 Tonne 3m Load Sling (Green)	3m	

# **3 TONNE (YELLOW)**





PRODUCT	DESCRIPTION	LENGTH	PRICE EX. VAT
JEFLSL0302Y	3 Tonne 2m Load Sling (Yellow)	2m	
JEFLSL0303Y	3 Tonne 3m Load Sling (Yellow)	3m	
JEFLSL0304Y	3 Tonne 4m Load Sling (Yellow)	4m	
JEFLSL0305Y	3 Tonne 5m Load Sling (Yellow)	5m	

## **4 TONNE (GREY)**





PRODUCT	DESCRIPTION	LENGTH	PRICE EX. VAT
JEFLSL0403GR	4 Tonne 3m Load Sling (Grey)	3m	
JEFLSL0404GR	4 Tonne 4m Load Sling (Grey)	4m	

## **5 TONNE (RED)**



PRODUCT	DESCRIPTION	LENGTH	PRICE EX. VAT
JEFLSL0502R	5 Tonne 2m Load Sling (Red)	2m	
JEFLSL0503R	5 Tonne 3m Load Sling (Red)	3m	
JEFLSL0504R	5 Tonne 4m Load Sling (Red)	4m	
JEFLSL0505R	5 Tonne 5m Load Sling (Red)	5m	

# PROTECTIVE GLOVES

## **BLACK/RED PROFESSIONAL FITTER GLOVE (PACKET OF 6 PAIRS)**

- Polyester liner with nitrile micro-thin coated palm
- · Strong and close fitting dexterous glove with high abrasion resistance
- · Designed to keep hands cool & dry
- · Sizes: L or XL





PROFESSIONAL



PRODUCT DESCRIPTION

JEFGLPROF-6PL Black/Red Professional Fitter Glove Large (Packet of 6 Pairs)

JEFGLPROF-6PXL Black/Red Professional Fitter Glove X Large (Packet of 6 Pairs)

## **ORANGE GRIP GLOVE (PACKET OF 6 PAIRS)**

- Strong Latex coated glove for general work and handling tasks
- Fabric back allows air to circulate around the hand for comfort and safety
- · Sizes: L or XL





П	EN 388
둼	旧
S	
	2121X

PRODUCT	DESCRIPTION	
JEFGLORG-6PL	Orange Grip Glove Large (Packet of 6 Pairs)	
JEFGLORG-6PXL	Orange Grip Glove X Large (Packet of 6 Pairs)	

# **ECO FIT GLOVE (PACKET OF 6 PAIRS)**

- · Polyester protective work glove
- Polyurethane coated palms for extra grip
- Suitable for precision tasks such as small-scale assembly
- · Sizes: L or XL





## **GECKO HEAVY DUTY HAND CLEANSER**

- Designed to effectively remove oil, grease and ground-in soils and substances from skin
- · Contains no harsh solvents
- Manufactured from natural extracts and ingredients, making it gentle on skin
- · Contains polychips to enhance cleansing action and lanolin to help prevent chapped and dry hands
- Ideal for automotive, engineering, agricultural and domestic use

## **500ML**

JEFHCLN0.5



















PRODUCT	DESCRIPTION	PRICE EX. VAT
JEFGLGG-M	Medium	
JEFGLGG-L	Large	
JEFGLGG-XL	X-Large	

# **ORANGE GRIP GLOVES**

 Strong Latex coated glove for general work and handling tasks

 Fabric back allows air to circulate around the hand for comfort and safety

· Sizes: L or XL





PRODUCT	DESCRIPTION	PRICE Ex. Vat
JEFGLORG-L	Large	
JEFGLORG-XL	X-Large	

# ORANGE THERMAL GLOVES Black latex coated palm and finger wrinkle finish

10g hi-visibility orange acrylic liner

Designed to keep hands warm in cold conditions

 Provides excellent grip, flexibility and durability

· Sizes: L or XL



PRODUCT	DESCRIPTION	PRICE Ex. Vat
JEFGLOT-L	Large	
JEFGLOT-XL	X-Large	

# DRY GRIP WATER-RESISTANT LATEX GLOVES

 Water-resistant work glove with latex fully-coated back, double-coated, sand-textured, latex palms & fingers, with soft nylon cuffs & inner lining

 Provides excellent grip, flexibility, comfort & protection when working in wet environments

· Sizes: L or XL





PRODUCT	DESCRIPTION	PRICE EX. VAT
JEFGLDG-L	Large	
JEFGLDG-XL	X-Large	

## **BLACK FITTERS GLOVES**

- · Fitters gloves with polyurethane coated palms for extra grip
- · Ideal for precision tasks such as small scale assembly
- · Sizes: L or XL



PRODUCT	DESCRIPTION	PRICE Ex. Vat
JEFGLSF-L	Large	
JEFGLSF-XL	X-Large	

## **BLACK PLATINUM FITTERS GLOVES**

- · Ultra thin nitrile foam
- · Black nitrile foam palms provides a secure grip
- · Nylon / Lycra lining
- · High abrasive resistance
- · Elasticated wrist cuffs lock out dirt and debris
- Sizes: S, M, L or XL





Large

X-Large

## **CUT RESISTANT GLOVES** · Ultra thin Nitrile foam on a nylon / lycra lining A strong and close fitting glove with high abrasion resistance · Cut Level 5 HPPE (High Performance Polyethylene) shell coating with grey PU · Light, breathable polyester material allows for more comfortable use · Heavy duty polyester bound cuffs for durability · Sizes: L or XL PRODUCT DESCRIPTION JEFGLCG-L Large JEFGLCG-XL X-Large

## **RIGGER GLOVES**

#### **JEFGLRIGK**

JEFGLPF-L

JEFGLPF-XL

- · High grade grey leather work gloves with 100% cotton back
- · Cotton lined for improved comfort, dexterity and moisture absorption
- · Size: One Size







# **RED PVC GAUNTLET (14") SAFETY WORK GLOVES**

#### JEFGLPVCG-XL

- · Features a smooth, resistant PVC finish with excellent abrasion protection
- · This versatile glove provides excellent resistance to most fats, alcohols, oils, detergents etc.
- · Ideal for wide range of tasks including DIY, labouring, cleaning & gardening





# **RED PVC KNIT-WRIST SAFETY WORK GLOVES**

#### JEFGLPVCKW-XL

- · Features a knitted wrist and cotton interlock lining with a smooth, resistant PVC finish with excellent abrasion protection
- · This versatile glove provides excellent resistance to most fats, alcohols, oils, detergents etc.
- Ideal for wide range of tasks including DIY, labouring, cleaning & gardening
- · Size: XL





PRICE EX.VAT

# GECKO GRIP NITRILE GLOVES

A workers' hands are the real tools of the trade, however it's the one set of tools that cannot be fixed or replaced when they don't get the proper protection. The Jefferson Gecko Grip Professional Nitrile Gloves offers all-round heavy duty protection, for a comfortable fit are available in sizes M, L and XL. A versatile and multi-purpose glove with ambidextrous fitting, providing superior heavy-duty protection and handling qualities.





- · Latex-free comfort fit, black nitrile material
- · "Diamond Dimple" texture for reliable grip
- · Superior puncture resistance & protection
- · Rolled cuff for additional strength
- · Heavy-duty protection
- · 100% Powder-free





&ECKO &RID भिन्दिन्द्रशिवनी Nitrile Gloves















PRODUCT JEFGLNIO-50L JEFGLNIO-50XI

Large (Box Of 50) X-Large (Box Of 50)

DESCRIPTION



## **BLUE NITRILE GLOVES**

- · The Jefferson Blue Nitrile Gloves range offers all-round chemical & bacterial protection
- · These versatile and multi-purpose gloves are ambidextrous, and available in sizes L & XL
- · Latex-free comfort fit
- · Rolled cuff for additional strength
- · 100% Powder-free
- · Chemical and hacteria resistant



PRODUCT	DESCRIPTION	PRICE EX. VAT
JEFGLNIBL-100L	Large (Box of 100)	
JEFGLNIBL-100XL	X-Large (Box of 100)	

# **SPRAY SUITS**



- · Designed to offer effective protection against dry particles and certain limited liquid chemical splashes (CE Protective Clothing Category III Type 5/6)
- · Certified to offer protection against radioactive particles and biological agents and reduce the build up of electrostatic charges
- · Suitable for a wide range of applications and environments including but not exclusive to: industrial cleaning, machine maintenance, clean rooms, toxic powder handling, asbestos inspection, pharmaceutical processing, insulation, painting, coating and resin applications



EN 13034:2005+A1:2009 LIMITED CHEMICAL SPLASH PROTECTION



EN ISO 13982-1:2004+A1:2010 DRY PARTICLE PROTECTION





EN 14126:2003 INFECTIVE AGENT PROTECTION



EN 1073-2:2002

RADIOACTIVE PARTICULATE PROTECTION (Class 1)

PRODUCT	DESCRIPTION	PRICE EX. VAT
JEFSPRS-L	Large Spray Suit	
JEFSPRS-XL	X Large Spray Suit	
JEFSPRS-XXL	XX Large Spray Suit	

# HEARING PROTECTION

## **PREMIUM EAR DEFENDERS**

#### JEFSFEMU01

- · General purpose ear defenders
- · Adjusts to three wearing positions
- · Lightweight & robust design
- · Single Number Rating (SNR): 24dB



PRICE EX.VAT

## HIGH PERFORMANCE FOLDING **EAR DEFENDERS**

#### JEFSFEMU02

- · SNR: 31.3dB
- · Efficient Noise Reduction
- · Self-adjusting cups provide superior fit
- · Comfortable & efficient seal against noise









# RESPIRATORY PROTECTION

## **FFP1 MASKS (PACK OF 5)**

#### JEFMSKFFP1-05

- · Moulded design with adjustable nose clip and cushioned nose/brow guard
- · Protects against non-toxic particulates. fumes, oil & water-based mists
- · Manufactured to CF 2797 EN149:2001 + A1:2009 (NR)



CE 2797 EN149:2001 + A1:2009 (NR)

PRICE EX.VAT

#### **FFP2 SAFETY MASKS**

- · Moulded design with adjustable nose clip and cushioned nose/brow guard
- · Protects against non-toxic particulates, fumes, oil & water-based mists
- · Manufactured to CE 2797 EN149:2001 + A1:2009 (NR)



CE 2797 EN149:2001 +A1:2009 (NR)

PRODUCT	DESCRIPTION	PRICE EX. VAT
JEFMSKFFP2V-03	FFP2 Valved Mask (Pack of 3)	
JEFMSKFFP2V-10	FFP2 Valved Mask (Box of 10)	

#### **FFP3 SAFETY MASKS**

- · Moulded design with adjustable nose clip and cushioned nose/brow guard
- · Protects against non-toxic particulates, fumes, oil & water-based mists
- · Manufactured to CE 2797 EN149:2001 + A1:2009 (NR)



CE 2797 EN149:2001

PRODUCT	DESCRIPTION	PRICE EX. VAT
JEFMSKFFP3V-02	FFP3 Valved Mask (Pack of 2)	
JEFMSKFFP3V-10	FFP3 Valved Mask (Box of 10)	

## **REUSABLE HALF-FACE RESPIRATORY MASK**

#### JEFMSKFIL-NF

Made using high quality liquid silicone, this easy clean, comfort fit mask

fits the users facial curve and adjusts to different face shapes.

- · Uncompromised visual field
- · The inhalation and exhalation valves enable smooth respiration
- · Suitable for agricultural, petroleum, chemical industry, light industry, manufacturing, building materials, construction and other industries
- · Filters not supplied



PRICE EX.VAT

## **REUSABLE HALF-FACE** RESPIRATORY MASK ACCESSORIES

- · Category III respiratory masks
- · Compatible with JEFMSKFIL half face mask

## PRE-FILTERS (2 PACK)

JEFMSKPRFIL-02





#### **RETAINER (2 PACK)**

JEFMSKPFRET-02





# **ABEK1 GAS FILTER CARTRIDGES (X2)**

TYPE	COLOR	PROTECTION
A1	Brown	Organic Vapours & Gases with boiling point 65°C & above
B1	Grey	Inorganic Vapours & Gases (ex. Carbon Dioxide/Monoxide)
E1	Yellow	Sulphur Dioxide & Other Acidic Vapours & Gases
K1	Green	Ammonia & Ammonia Derivatives Vapours & Gases
AREK1	A1. B1. E1. K1	A1 (B1 (E1 (K1

JEFMSKFCAR-02

CAT.III

**C** € 0121





# EYE PROTECTION

#### FRAMELESS SAFETY GLASSES

- · Available in clear, amber or dark lenses
- · Polycarbonate arms & legs









	PRODUCT	DESCRIPTION	PRICE EX. VAT
1	JEFSFGLS02	Clear Frameless Safety Glasses	
2	JEFSFGLS03	Amber Frameless Safety Glasses	
3	JEFSFGLS04	Dark Frameless Safety Glasses	

#### **BLACK NYLON FRAME SAFETY GLASSES**

#### JEFSFGLS01

- · One piece design for low energy impact protection
- · Lightweight black nylon frame & clear lens
- · Adjustable temple length
- · Manufactured, tested and approved to EN 166:2001





#### **ANTI FOG & SCRATCH SAFETY GLASSES**

#### JEFSFGLS05

- · One piece design for low energy impact protection
- · Lightweight black nylon frame & clear lens
- · Soft, non-slip nose bridge
- · Adjustable temple length
- · Manufactured, tested and approved to EN 166:2001







#### **CLEAR SAFETY GOGGLES**

#### JEFSFG0G01

**C** € EU 2016/425 EN 166

- · Lightweight clear PVC body to fit most face shapes
- · Indirect ventilation system for dust & liquid protection







# FLIP UP LENS GAS WELDING GOGGLES

#### JEFSFG0G02

- · Infrared (IR) shade 5 protection with flip-up lenses
- · Clear polycarbonate safety lenses
- · Soft flexible vinyl frame
- · Indirect ventilation in goggle frame
- · Adjustable head strap







#### **PROFESSIONAL SAFETY GOGGLES**

#### JEFSFG0G03

- · Clear lens with soft frame, nose cushioning & browguard
- · Airtight and pressure-free fit with adjustable strap
- · Full vision goggle with unrestricted side visibility
- · Tested and approved to CE EN 166:2001







# INDIRECT VENTILATION GAS **WELDING GOGGLES**

#### JEFSFG0G04

- · Infrared (IR) shade 5 protection
- · Indirect ventilation in goggle frame
- · Green PC lens & frame
- · Soft frame with nose cushioning and browguard
- · Airtight and pressure-free fit with adjustable strap
- · Tested and approved to EN166, EN169. EN170 & EN175





PRICE EX.VAT

# FACE PROTECTION

# CLEAR VISOR FACE SHIELD UEFSFFSH01 - 8"x15" full face clear visor - Browguard with adjustable headband - Quick-lock clips for visor replacement - Tested & approved to CE EN 166:2001

#### **MESH VISOR FACE SHIELD**

#### JEFSFFSH02

- 8"x15" full grill mesh visor
- Browguard with adjustable headband
- Quick-lock clips for visor replacement
- Tested & approved to CE EN 1731:2006





# **MATS**

# **KNEELING MATS**

- · Thick EVA material
- · Oil & water resistant
- Reduces stress and discomfort often felt in kneeling jobs
- Its durable and comfortable design makes it the perfect addition to any working environment



2



1 JEFMATKNEE-S Small Kneeling Mat (30 x 210 x 450mm)
2 JEFMATKNEE-L Large Kneeling Mat (30 x 380 x 980mm)

#### **ANTI-FATIGUE RUBBER MATS**

- $\boldsymbol{\cdot}$  Suitable for use in wet and dry areas
- · Textured surface to provide slip-resistance
- $\cdot$  Tough and durable for prolonged periods of use





PRODUCT	DESCRIPTION	PRICE EX. VAT
1 JEFMATANBK01	Large Anti-Fatigue Rubber Mat (1505 x 905 x 12mm)	
2 JEFMATANBK02	Small Anti-Fatigue Rubber Mat (914 x 610 x 12mm)	

PRICE EX. VAT

# DIAMOND **CUTTING BLADES**

- · Engineered with an extended service life in mind
- performance over many of our competitors, 10mm segment height on our 41/2" and 9" blades and 12mm on the 12" blades

#### **INDUSTRIAL DIAMOND BLADES (ASPHALT)**

· Usage: Suitable for wet & dry cutting of asphalt, asphalt over concrete, and abrasive building materials



PRODUCT	SIZE	BORE	MAX SPEED	MAX RPM	PRICE EX. VAT
JEFDIBLB-300A	300mm/12"	20mm	100m/s	6,400	

25.4mm

#### **GENERAL PURPOSE DIAMOND BLADES (SINTERED TYPE)**

JEFDIBLB-350A

350mm/14"

· Usage: General Masonry - Concrete Floors, Slabs, Slate, Paving Stones, Facing Bricks



5,500

100m/s



PRODUCT	SIZE	BORE	MAX SPEED	MAX RPM	PRICE EX. VAT
JEFDIBLR-115T	115mm/4.5"	22mm	80m/s	13,300	
JEFDIBLR-230T	230mm/9"	22mm	80m/s	6,650	
JEFDIBLR-300T	300mm/12"	20mm	80m/s	5,100	

#### **INDUSTRIAL DIAMOND BLADES (LASER WELDED)**

· Usage: Concrete/Hard Material - Reinforced Concrete, Hard Facing Brick, Clay Pipes, Roofing Tiles



PRODUCT	SIZE	BORE	MAX SPEED	MAX RPM	PRICE EX. VAT
JEFDIBLB-115P	115mm/4.5"	22mm	80m/s	13,300	
JEFDIBLB-230P	230mm/9"	22mm	80m/s	6,650	
JEFDIBLB-300P	300mm/12"	20mm	80m/s	5,100	
JEFDIBLB-350P	350mm/14"	25.4mm	100m/s	5.500	

## **INDUSTRIAL TILE CUTTING DIAMOND BLADES (LASER WELDED)**

· Usage: Tiles, Ceramic, Porcelain



PRODUCT	SIZE	BORE	MAX SPEED	MAX RPM	PRICE Ex. Vat
JEFDIBLG-115TC	115mm/4.5"	22mm	80m/s	13,300	
JEFDIBLG-230TC	230mm/9"	22mm	80m/s	6,650	



- · Increased diamond density and segment heights improve and 14" blades, greatly increases the lifespan of our blades
- · Many of our competitors use between 5 to 10mm for similar sized blades



& CONCRETE NDUSTRIA

# **CUTTING & GRINDING DISCS**

#### **METAL CUTTING ABRASIVE DISCS**

Whether you need to cut iron box section, mild steel or steel reinforcing rod, there's a Jefferson® disc to do the job. Our discs come in a variety of bore sizes to suit the most common tools and are manufactured from the highest quality materials.

PRODUCT	SIZE	BORE	PRICE Ex. Vat
JEFD01PR0	4"	16mm	
JEFD02PR0	4.5"	22mm	
JEFD04PR0	9"	22mm	
JEFD06PR0	12"	20mm	
JEFD08PR0	14"	25.4mm	



#### **METAL GRINDING ABRASIVE DISCS**

When cutting isn't an option, or maybe you only need to reduce the edge of a surface, then you need a grinding disc. Our range of discs have been designed to work efficiently while maintaining durability.

PRODUCT	SIZE	BORE	PRICE Ex. Vat
JEFD15PR0	4"	16mm	
JEFD16PR0	4.5"	22mm	
JEFD17PR0	9"	22mm	



#### **INOX CUTTING ABRASIVE DISCS**

Due to the particular properties of stainless steel such as its hardness and ductile nature, our INOX steel cutting discs are much slimmer than the standard metal cutting discs.

PRODUCT	SIZE	BORE	PRICE Ex. Vat
JEFD25PR0	4"	16mm	
JEFD26PR0	4.5"	22mm	
JEFD28PR0	9"	22mm	
TUNDSS045	4.5"	20mm	
TUNDSS090D	9"	25.4mm	



#### **STONE CUTTING ABRASIVE DISCS**

Since the properties of stone or concrete differ greatly from that of steel, the discs required to cut them must also vary. Our stone cutting discs have been optimised for performance in slicing through both natural stone and man-made concrete products.

PRODUCT	SIZE	BORE	PRICE Ex. Vat
JEFD10PR0	4.5"	22mm	
JEFD12PR0	9"	22mm	
JEFD13PR0	12"	20mm	



#### **INOX CUTTING ABRASIVE DISCS - TIN OF 10**

#### JEFD26PRO-CASE

Due to the particular properties of stainless steel such as its hardness and ductile nature, our INOX steel cutting discs are much slimmer than the standard metal cutting discs.





#### **ABRASIVE FLAP DISCS**

The abrasive zirconium surface of our flap discs allow for a slower, more controlled removal of smaller amounts of waste material, particularly material produced while welding.

PRODUCT	SIZE	BORE	GRIT	PRICE EX. VAT
JEFD20PR0	4.5"	22mm	40	
JEFD21PR0	4.5"	22mm	60	
JEFD30PR0	4.5"	22mm	80	
JEFD31PR0	4.5"	22mm	120	
MCF04540	4.5"	22mm	40	
MCF04560	4.5"	22mm	60	
MCF07040	7"	22mm	40	



#### **BLACK POLY DISC 115MM 22MM BORE**

#### JEFD50PR0

- · Suitable for use on angle grinders
- · Removes rust & paint on a wide range of materials
- · Max Speed: 13300rpm
- · Size: 115mm
- · Bore: 22.2mm







# SANDING & POLISHING

## **EMERY CLOTH ROLLS**

- · Made from Aluminium oxide
- · Strong and flexible multi-purpose abrasive cloth
- · Easy tearing, high-performance material
- · Ideal for removing rust, paint, cleaning and polishing metallic surfaces

PRODUCT	DESCRIPTION	PRICE EX. VAT
JEFEMYR2550-040	Emery Cloth Roll 25mm x 50m x 40G	
JEFEMYR2550-060	Emery Cloth Roll 25mm x 50m x 60G	
JEFEMYR2550-080	Emery Cloth Roll 25mm x 50m x 80G	
JEFEMYR2550-120	Emery Cloth Roll 25mm x 50m x 120G	
JEFEMYR2550-150	Emery Cloth Roll 25mm x 50m x 150G	
JEFEMYR5050-040	Emery Cloth Roll 50mm x 50m x 40G	
JEFEMYR5050-060	Emery Cloth Roll 50mm x 50m x 60G	
JEFEMYR5050-080	Emery Cloth Roll 50mm x 50m x 80G	



#### **INDUSTRIAL CUP BRUSHES**

For jobs requiring the removal of rust and other corrosion from metal surfaces, our cup brushes are a fast and efficient solution. They are also well suited to the removal of paint or similar surface coatings. While best results are found when used on metallic surfaces, they can be used on others but we would advise that you test a small area first.

#### INDUSTRIAL

	CRIMPED KNOT				
PRODUCT	DESCRIPTION	PRICE EX. VAT			
1 JEFCBCR075M14	M14 75mm				
2 JEFCBCR100M14	M14 100mm				
3 JEFCBCR125M14	M14 125mm				

	TWIST KNOT	
PRODUCT	DESCRIPTION	PRICE EX. VAT
4 JEFCBTW065M14	M14 65mm	
5 JEFCBTW100M14	M14 100mm	



Jefferson

# New

MOBILE TOOL CHESTS & WORK STATIONS PAGE 178



# GRINDER WHEELS

#### **BENCH GRINDER CRIMPED WIRE WHEEL BRUSHES**

- · Ideal for removing rust from metal surfaces
- · Suitable for fitting on a wide range of bench grinder sizes
- · Manufactured & tested to BS EN 1083-2 standard
- · Crimped, coarse brassed steel wire fill
- 32mm standard arbor with multi-bore reducer set: 25.4mm, 22mm, 19mm, 16mm, 12.7mm
- · Max RPM: 6000



#### **BENCH GRINDING WHEELS**

The Jefferson® grinding stones come in sizes 6" or 8" in either 36 or 60 grit. For the jobs that require a little more roughness, 36 grit would be the preferable choice. 60 grit is ideal for those jobs that require less coarseness.

# COMPATIBLE WITH ALL BENCH GRINDERS

PAGE 72

DENOII UII	TAGE 12		
PRODUCT	DESCRIPTION	COMPATIBLE WITH	PRICE EX. VAT Jefferson
JEFBGWH06-036	6" Bench Grinder Wheel 36 Grit 20mm Bore	JEFBGS06	See and the Company of the Company
JEFBGWH06-060	6" Bench Grinder Wheel 60 Grit 20mm Bore	JEFBGS06	
JEFBGWH08-036	8" Bench Grinder Wheel 36 Grit 25mm Bore	JEFBGS08	N. Commons
JEFBGWH08-060	8" Bench Grinder Wheel 60 Grit 25mm Bore	JEFBGS08	6" GRINDING WHEEL
JEFBG6WIND-036	6" Bench Grinder (Industrial) Wheel 36G 25mm Wide 32mm Bore	JEFBG6	36 GRIT
JEFBG6WIND-060	6" Bench Grinder (Industrial) Wheel 60G 25mm Wide 32mm Bore	JEFBG6	
JEFBG8WIND-036	8" Bench Grinder (Industrial) Wheel 36G 32mm Wide 32mm Bore	JEFBG8	
JEFBG8WIND-060	8" Bench Grinder (Industrial) Wheel 60G 32mm Wide 32mm Bore	JEFBG8	

# WIRE BRUSHES





	PRODUCT DESCRIPTION		PRICE EX. VAT
1	JEFBRPBC03	Plastic Handle Brass Coated Wire Brush	
2	JEFBRPSS04	Plastic Handle Stainless Steel Wire Brush	
3	JEFBRWCS01	Wooden Handle Mild Steel Wire Brush	
4	JEFBRWSS01	Wooden Handle Stainless Steel Wire Brush	

# **FUEL TRANSFER PUMPS**

#### **FUEL TRANSFER PUMP 230V**

#### JEFPMPDIECUBE60

This 230V mobile pump is perfect for dispensing diesel or light fuel oils such as paraffin from drums or tanks. The equipment comprises of an electric motor, vane oil pump, flow meter and fuel nozzle. This dispenser has been designed for a wide variety of non-commercial uses and is ideal for refuelling vehicles and equipment in garages, construction sites or agricultural environments. The pump kit is reliable, easy to operate and easily maintained.

- · Flow Rate: 60L/min
- · Motor: 550W (2800rpm)
- · Max Pressure: 3bar / 44psi
- · Suction: Distance (5m) Lift (10m)







#### **DIESEL PUMP SET**

- · Self-priming rotary vane pump 40L/min / 140W
- · Cast iron pump body finished with anti-corrosion paint
- · Vane pump with sintered steel rotor and acetal resin vanes
- · By-pass valve incorporated in the pump body
- · Comes complete with metal diesel gun with 1" swivel connection







PRODUCT	DESCRIPTION	PRICE Ex. Vat
JEFPMPDIESET12V	Diesel Pump Set DC 12V	
JEFPMPDIESET24V	Diesel Pump Set DC 24V	

## **DIESEL FLOW METER**

## JEFPMPDIEFLOWM

- · Max. operating pressure: 3.5bar / (49psi)
- · 4 digit counter & total counter
- · Mechanical readout with rotating wheels
- · Flow rate: 20 -120L/min
- · Suitable for gravity fed or pump applications
- · Accurate to +/-1%
- · Aluminium metering chamber
- · Subtotal can be set to zero



PRICE EX.VAT

#### **AUTOMATIC FUEL NOZZLE**

#### JEFPMPAUTONOZZ

- · Flow rate: 0-80L/min
- · Operating pressure: 0.18MPa
- · Suitable for diesel or petrol





# **PORTABLE TANKS**

#### **75 LITRE PORTABLE AD BLUE DISPENSING TANK WITH 12V PUMP**

#### JEFTNKADB075L

- · 75 Litre capacity tank ideal for transporting and dispensing AdBlue®
- · Manufactured from impact-resistant and UV stabilsed polyethylene and designed for the car or commercial vehicle workshop and portable outdoor refilling
- · Supplied with: AdBlue® electric pump; auto-shutoff nozzle; 4m EPDM delivery hose and 4m power cable with 12V battery clamps
- · Fitted with two 8" PU wheels which allow the unit to be easily manoeuvred over uneven ground for filling outside of the workshop
- · Supplied with hose holder and vent caps
- · Suitable for all diesel-engined vehicles that use diesel exhaust fluid (DEF)
- · Power: 12V DC
- · Maximum Flow Rate: 17L/min
- Pressure: 40nsi
- · Wheel Dimensions: 8" / 200mm
- · Dimensions: 1040 x 520 x 440mm
- · Weight: 15kg



## **PORTABLE DIESEL TANK WITH 12V PUMP**

- · Manufactured from HDPE for the safe transportation and
- Supplied with a 12V electric pump. 4m electric cable and clamps, and a 4m delivery hose with automatic fuel nozzle
- · Can be safely secured and transported on a pick-up truck or van, using grooves for tie down straps and six handles for positioning
- · Complies to ADR 1.1.3.1.C for exemption from requirements of ADR regulations
- · Supplied with lockable cover



	PRODUCT	DESCRIPTION	DIMENSIONS	CAPACITY	POWER SUPPLY	FLOW RATE	WEIGHT	PRICE Ex. Vat
1	JEFTNKDIE210L	210 Litre Portable Diesel Tank With 12V Pump	1100 x 800 x 470mm	210L	180W / 15A	40L/min	30.4kg	
2	JEFTNKDIE400L	400 Litre Portable Diesel Tank With 12V Pump	1100 x 800 x 720mm	400L	180W / 15A	40L/min	43.2kg	

# WATER PUMPS

#### **PETROL WATER PUMPS**

- · Self-Priming Time: 70 s/4m
- · Engine Type: MacGen Four Stroke, Air Cooled, OHV Petrol
- · Guaranteed Noise Level: 102dBA
- · Fuel Tank Capacity: 3.6L
- · Lubrication Oil: SAE 10W/30





	PRODUCT	DESCRIPTION	PORT	DISCHARGE PORT DIAMETER	WAX.	RATED Capacity	MAX. HEAD	MAX. SUCTION HEAD	ENGINE	DISPLACEMENT CAPACITY	DIMENSIONS	WEIGHT	PRICE EX. VAT
1 JE	FWATPMP02	2" Petrol 5.5HP Water Pump	2" / 50mm	2" / 50mm	5.5HP / 3600rpm	36m³/h	28m	8m	5.5HP Petrol	163cc	517 x 415 x 452mm	23kg	
2 JE	FWATPMP03	3" Petrol 6.5HP Water Pump	3" / 76mm	3" / 76mm	6.5HP / 3600rpm	60m³/h	26m	6m	6.5HP Petrol	196cc	466 x 376 x 398mm	25kg	

#### **750W SUBMERSIBLE WATER PUMP**

#### JEFSUBPDW225-80

- · Manufactured from corrosion resistant materials
- · Fitted with a float switch
- · Rated Power/Motor: 750W
- · Power Supply: 230V / 50Hz
- · Current: 13A
- · Maximum Flow Rate: 13500L/hr / 225 L/min
- · Maximum Head: 8m
- · Maximum Depth: 7m
- · Maximum Grain Size: 35mm
- · Maximum Temperature: 40°C
- · Cable Length: 10m
- · Insulation Class: B
- · Ingress Protection: IP68
- · Outlet Diameter: 1" / 1 1/4" / 1 1/2"
- · Dimensions: 225 x 190 x 355mm
- · Weight: 4.5kg



#### SUITABLE FOR

#### Domestic pumping of:

- Rainwater
- Fresh water
- · Mains water
- Chlorinated swimming pool water

#### Effective drainage of:

- · Cellars
- Sinks
- Cisterns
   Raths
- · General transfer of water









#### 1100W SUBMERSIBLE WATER PUMP

#### JEFSUBPDW266-95

Manufactured from corrosion resistant materials with stainless steel motor case

· Fitted with a float switch

- · Rated Power/Motor: 1100W
- · Power Supply: 230V / 50Hz
- · Current: 13A
- · Maximum Flow Rate: 15960L/hr / 266L/min
- Maximum nead: 9.5m
- · Maximum Depth: 7m
- Maximum Head: 9.5m
- Maximum Grain Size: 35mm

FLOAT SWITCH LENGTH ADJUSTMENT CLIP

- Maximum Temperature: 35°C
   Cable Length: 10m
- Insulation Class: B
- · Ingress Protection: IP68
- · Outlet Diameter: 1" / 1 1/4" / 1 1/2"
- · Dimensions: 225 x 190 x 355mm
- · Weight: 6.12kg

FLOAT SWITCH

COMPATIBLE WITH 25MM HOSE JEFLFLH05025-10



**CARRY HANDLE** 

**OUTLET / DISCHARGE** 

HOSE CONNECTION

#### SUITABLE FOR

#### Domestic pumping of:

- · Rainwater
- · Fresh water
- Mains water
- · Chlorinated swimming pool water

#### Effective drainage of:

- · Cellars
- · Sinks
- Cisterns
  - Baths
- · General transfer of water









MOTOR CASING

**FLOAT SWITCH** 

lefferson

# **INDUSTRIAL 500W SUBMERSIBLE WATER PUMP**

- · Rated Power/Motor: 500W
- · Power Supply: 110V / 230V
- · Current: 16A / 13A
- · Maximum Flow Rate: 12600L/hr / 210L/min
- · Maximum Head: 12m
- · Maximum Depth: 5m
- · Maximum Grain Size: 7mm
- · Maximum Temperature: 40°C
- · Cable Length: 10m
- Insulation Class: B
- · Ingress Protection: IP68
- · Outlet Diameter: 2"
- Dimensions: 239 x 194 x 356mm
- Weight: 12 8kg

· weight: 12.8kg			
PRODUCT	DESCRIPTION	PRICE EX. VAT	13 AMP (230V)
JEFSUBPIDW210-12	Industrial 500W Submersible Water Pump (110V)		
JEFSUBPIDW210-12S	Industrial 500W Submersible Water Pump (230V)		INDUSTRIAL

IMPROPER USE MAY RESULT IN DAMAGE OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY PROVIDED WITH THESE APPLIANCES.

DO NOT MODIFY THIS EQUIPMENT FOR ANY OTHER USE.

The above appliances are not suitable for pumping explosive or flammable materials or sewage. Do not use this equipment to pump industrial residue or sea water.

These pumps are not designed for continuous running (e.g. permanent circulation in filters systems).

They should not be used to pump liquids containing abrasive materials (e.g. containing mixtures of dirt, sand, mud or clay)





#### **INDUSTRIAL 450W SUBMERSIBLE WATER PUMP**

- · Ideal for pumping large or small areas of water found on flat surfaces, especially after flooding and liquid spills
- · 1" outlet can be adjusted from top or side discharge to suit multiple applications
- · 450W motor with thermal cutout
- · Heavy-duty and durable build quality
- · Manufactured from corrosion resistant materials with aluminium outer motor case
- · Designed for pumping dirty water and residue
- · Double-end mechanical seal
- · Tough solid rubber base
- · Rated Power/Motor: 450W
- · Power Supply: 110V / 50Hz
- · Current: 16A

•	Maximum Flow Rate:	
	5100L/hr / 85L/min	
	Maximum Head: 10m	

- · Maximum Depth: 5m
- Maximum Grain Size: 6mm
- · Maximum Temperature: 40°C
- Cable Length: 10m
- Insulation Class: B
- Ingress Protection: IP68
- · Outlet Diameter: 1"
- Dimensions:
  - 190 x 190 x 301mm
- · Weight: 11.8kg



Industrial 450W Submersible Water Pump (110V) 110V ~ 50Hz / 16A

230V ~ 50Hz / 13A

# **SEWAGE PUMPS**

1 JEFSUBPIRE085-10

JEFSUBPIRE085-10S

PRODUCT

#### INDUSTRIAL 1100W SUBMERSIBLE SEWAGE PUMP

- · An industrial submersible pump with a high-speed vortex impeller, rotary cutter and float switch designed for processing and draining sewage
- · Manufactured from corrosion resistant materials with aluminium motor case
- · Designed for pumping sewage and dirty water with a maximum flow rate of 270L/min
- · 2" discharge hose connector
- · 10m maximum head
- · Rated Power / Motor: 1100W
- Power Supply: 110V / 230V ~ 50Hz

· Maximum Flow Rate: 270L/min / 16200 L/hr

DESCRIPTION

Industrial 450W Submersible Water Pump (230V) NEW!

- Maximum Head: 10m
- Maximum Depth: 5m
- Maximum Viscosity: 7x10<sup>-7</sup> 23x10<sup>-6</sup>m<sup>2</sup>/s
- Maximum Density: 1.2 x 103kg/m3
- Maximum Temperature: 40°C
- Cable Length: 10m
- Insulation Class: B · Ingress Protection: IP68
- · Outlet Diameter: 2"
- Dimensions: 245 x 200 x 477mm
- Weight: 23kg



# INDUSTRIAL

DESCRIPTION PRODUCT JEFSUBPISEW270-10CP Industrial 1100W Submersible Sewage Pump (230V) 230V ~ 50Hz / 13A JEFSUBPISEW270-10-110 Industrial 1100W Submersible Sewage Pump (110V) 110V ~ 50Hz / 16A

# **INDUSTRIAL 450W AUTOMATIC SUBMERSIBLE WATER PUMP (110V)**

#### JEFSUBPIDW260-11

- · Extremely robust & compact design
- · 2" (50mm) outlet float switch for controlled pumping
- · Designed to offer excellent durability during periods of continuous use
- · Dual position outlet port (vertical & horizontal) to avoid kinking
- · Rated Power/Motor: 450W
- · Power Supply: 110V / 50Hz
- · Current: 16A
- · Maximum Flow Rate: 15600L/hr / 260L/min
- · Maximum Head: 11m
- · Maximum Depth: 5m
- · Maximum Grain Size: 6mm Maximum Temperature: 40°C
- · Cable Length: 10m
- · Insulation Class: B
- Ingress Protection: IP68
- · Dimensions: 181 x 181 x 295mm
- Weight: 11.6kg



COMPATIBLE WITH 50MM HOSE JEFLFLH05050-10



IMPROPER USE MAY RESULT IN DAMAGE OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY PROVIDED WITH THESE APPLIANCES. DO NOT MODIFY THIS EQUIPMENT FOR ANY OTHER USE.

The above appliances are not suitable for pumping explosive or flammable materials or sewage. Do not use this equipment to pump industrial residue or sea water. These pumps are not designed for continuous running (e.g. permanent circulation in filters systems)

They should not be used to pump liquids containing abrasive materials (e.g. containing mixtures of dirt, sand, mud or clay)

# **INDUSTRIAL 1500W SURMERSIBLE SEWAGE PUMP (230V)**

#### JEFSUBPISEW500-23

13 AMP -230V

- · An industrial submersible pump with a high-speed vortex impeller, rotary cutter and float switch designed for processing and draining sewage
- · Rated Power/Motor: 1500W
- · Power Supply: 230V
- · Current: 13A
- · Maximum Flow Rate: 300001 /hr / 5001 /min
- · Maximum Head: 23m
- · Maximum Depth: 5m
- · Maximum Temperature: 40°C
- · Cable Length: 8m
- · Insulation Class: F






PRICE EX.VAT

# FLUID EXTRACTION

## **LAYFLAT HOSE**

- · High capacity 10m water discharge hose
- · Heavy duty, hard-wearing PVC hose reinforced with synthetic fibres
- · 4bar working pressure
- · 25mm hose compatible with:
- JEFSUBPIRE085-10,
- JEFSUBPDW225-80. JEFSUBPDW266-95
- · 50mm hose compatible
- JEFSUBPISEW270-10,
- JEFSUBPIDW210-12,
- JEFSUBPIDW210-12S JEFSUBPIDW260-11,
- JEFWATPMP02
- · Ideal for emptying ponds, pools,





PRODUCT	DESCRIPTION	PRICE Ex. Vat
JEFLFLH05025-10	25mm x 10m Layflat Hose	
JEFLFLH05050-10	50mm x 10m Layflat Hose with Clamp	

## **7 LITRE MANUAL FLUID EXTRACTOR**

#### JEFLUEXTM07

- · Made from ABS thermoplastic polymer material with aluminium inflator
- · Suitable for the extraction of all types of engine, transmission and lubricating oils from cars, motorcycles, engines and industrial machinery
- · Also suitable for low viscosity fluids such as water
- · 7 Litre capacity
- 26mm Suction port



4, 6, 8 & 10MM SUCTION PROBES (1M LONG) INCLUDED

# efferson PRICE EX.VAT

## **1" ROTARY PUMP**

#### **JEFLUROPUMP**

- · Heavy-duty rotary pump transfers non corrosive fluids of light to medium viscosity
- · Seals are made of nitrile rubber
- · Suitable for up to 55 gallon barrels (205 Litres)
- · Comes complete with ERW pipe on suction and chrome plated on delivery side
- · 2" bung nut fitted with suction tube
- · Cast iron vanes precisely machined are fitted in pump housing for smoother delivery
- · Full Length: 1300mm



## **LEVER OIL PUMP**

#### JEFLULOPMP

- · Cushioned vinyl handle
- · Supplied with self adjusting suction tube
- · Dispenses approximately 300cc per stroke
- · Suitable for use with 50 to 205 litre drums
- · The Jefferson self-priming lever oil pump is manufactured from die-cast aluminum to give a quality finish.
- · Supplied with self-adjusting, telescopic suction tube and 2" bung nut.
- · Full Length: 1300mm





# GREASE HANDLING

#### **TUNDRA 50:1 GREASE PUMP & GUN**

#### TUNAGP50-60

World class industrial high pressure grease pump with guaranteed performance and hassle free operation. The pump dispenses grease at pressures up to 50 times the air inlet pressure. Designed to work in tough conditions – they are ideal for use in industry, workshop, agricultural, construction or as part of a mobile grease system.

- · Working Pressure: 2-10bar / 30-50psi
- · Max Air Pressure: 10bar (150psi)
- · Max Outlet Pressure: 500bar (7500psi)
- · Air Inlet Connection: 1/4" BSP Female
- · Grease Output: 110kg/min
- · For 50-60kg drums
- Supplied complete with drum cover, rubber lined follower plate, 84" high pressure grease hose, Z swivel and professional grease control valve



INDUSTRIAL



COMPATIBLE

WITH 12"

FLEXIBLE RUBBER

HOSE



## TUNDRA 12.5KG HIGH PRESSURE GREASE PUMP

#### TUNHPGP-125

- Provides portable, high pressure greasing, where power is not available or when an air operated grease pump cannot be afforded
- $\cdot$  Pump has steel construction with aluminium cast head & solid steel pumping chamber
- Comes complete with lift handle, drum cover, rubber lining follower plate, 48" flexible grease hose fitted with professional four jaw coupler
- · Ideal for clean greasing of machinery, equipment, trucks and cars
- · Drum cover diameter: 287mm
- · Pump Length Below Cover: 315mm
- · Pail Capacity: 12.5kg





## **TUNDRA UNIVERSAL GREASE NIPPLE COUPLER**

#### **TUNHPQLGC-18**

- · High pressure quick connect grease coupler
- · Max Pressure: 8000psi
- · 1/8" BSPT (Female) threads






INDUSTRIAL

# CONTINUOUS FLOW AIR GREASE GUN

#### JEFLUGGUN03

- Pistol-type, single shot gun suitable for agricultural, automotive and industrial applications
- Die cast head and body with chromed steel grease tube
- Continuously pumps grease while trigger is depressed with 3 way fill and air-bleed valve
- · Accepts 400g grease cartridges, bulk or manual fill
- · Includes rigid delivery tube and 4-jaw coupler
- · Supplied with UK quick release air fitting
- · Angled spout
- · Operating pressure: 60-150psi
- · Delivery pressure: 1200 5000psi
- · Air inlet: 1/4" BSP



# PROFESSIONAL IRON HEAD GREASE GUN

#### JEFLUGGUN04

- Highly durable drop resistant cast iron pump head with robust and durable construction
- · Fitted with a comfortable easy grip handle
- · Accepts 400g grease cartridges
- · Angled spout
- Delivery pressure: 6000psiDelivery per stroke: 0.7g









# MULTI-FUNCTIONAL GREASE GUN

#### JEFLUGGUN05


- · Highly durable die-cast aluminium alloy pump head
- Fitted with a 2-way operating extendable handle:
   Piston type Ideal for use in confined spaces
   Lever type for when high pressure and volume is required
- · Suitable for standard 400g cartridges
- · Straight spout and 18" flexible hose
- · Delivery pressure: 6000psi
- · Delivery per stroke: 0.56a
- · Capacity: 400cm3
- · Weight: 1.85kg



# **GREASE GUN POWER DRILL ATTACHMENT**

#### **JEFUNIPCPGR**

- Fully automatic, cycles continuous lubricating grease flow to the power tool during operation
- Heavy duty aluminium construction supporting high working pressures between 4000-8000psi
- Equipped with high pressure relief safety valve for user protection and durability
- · Grease capacity: 14 oz. cartridge / bulk / dispenser
- Rated working pressure: 4000psi / 275bar / 27 5MPa
- · Maximum pressure: 8000psi / 552bar / 55.2Mpa
- Pressure relief valve: Yes (>8000psi / >552bar / >55.2MPa)
- · Power tool coupling holder capacity: 1.5" 3"

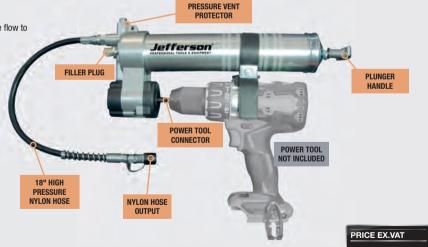

#### 12" FLEXIBLE RUBBER HOSE

#### JEFLURHOSE12

- · Length: 12" (300mm)
- · Made from heavy duty flexible rubber
- · Fits all standard grease guns for additional flexibility









# FLUID CONTAINERS & FUNNELS

#### **JERRY CANS**

 Available in a range of sizes, our Jerry Cans are U.N. approved and provide a secure, steel casing to ensure the safe transportation and storage of a wide variety of liquids





 $\,\cdot\,$  Manufactured from 0.8mm steel and finished with a lockable, air-tight nozzle and cap

Colour easily indicates the jerry can contents:
 Green – Unleaded fuel









PRODUCT	DESCRIPTION	PRICE EX. VAT
1 JEFJERC05L	5 Litre Jerry Can	
2 JEFJERC10L	10 Litre Jerry Can	
3 JEFJERC20L	20 Litre Jerry Can	

#### **5 LITRE PLASTIC FUEL CANS**

- · 5 litre capacity with flexible pouring spout
- Manufactured from reinforced high density polyethylene
- $\boldsymbol{\cdot}$  Available in red or green
- Complies with ADN 2019 / ADR 2019 / RID 2019 regulations







#### HAND PUMP SPRAYER

- · Ideal for spraying a wide variety of fluids and chemicals
- Complete with viton seals which are widely used in aerospace, military, chemical processing, oil and gas, and other application areas with extreme temperature, pressure, and chemical environments
- · Features an ergonomic handle and pressure relief valve
- Fitted with adjustable nozzle to switch between mist and jet settings





	PRODUCT	DESCRIPTION	CAPACITY	PRICE Ex. Vat
1	JEFHPS1.5L	1.5L Hand Pump Sprayer Complete With Viton Seals	1.5 Litres	
2	JEFHPS2.5L	2.5L Hand Pump Sprayer Complete With Viton Seals	2.5 Litres	

## 17 LITRE OIL/ FLUID DRAIN PAN

#### JEFPAND017

- For the recovery of oil and antifreeze, the pan keeps the workshop floor free from oily residue
- · Remains rigid even with hot oil
- · High-density Polyethylene
- · UV stabiliser
- · Anti-splash lip





#### **OIL CANS**

- · Available in 500cc & 1000cc
- · Heavy-gauge tin-coated steel body with powder-coated finish
- · Double steel ball valve pump mechanism for high pressure fluid delivery



PRODUCT	DESCRIPTION	PRICE Ex. Vat
JEFLUOCAN500	500cc Oil Can	
JEFLUOCAN1000	1000cc Oil Can	


# 1 LITRE SPRAY BOTTLE

#### JEF1LTRB0T

- · Max Capacity: 1000cc
- · Length of range with long jet: 7m
- · Height of range with long jet: 3.5m
- · Wide angle max: 60°
- · CC Leverage: 2.00cc







# **BUCKETS & TUBS**

#### **26 LITRE FLEXITUBS**

- · Frost proof
- · 26 litre capacity
- · Strong handles for easy carrying
- · Available in black, yellow or green
- · Ideal for gardens, homes, stables, construction sites and a huge range of alternative applications



PRODUCT	DESCRIPTION	PRICE Ex. Vat
1 JEFFLXTUB26-B	26 Litre Flexitub (Black)	
2 JEFFLXTUB26-Y	26 Litre Flexitub (Yellow)	
3 JEFFLXTUB26-G	26 Litre Flexitub (Green)	

#### **42 LITRE FLEXITUBS**

- · Frost proof
- · 42 litre capacity
- · Handles tested to 150kg
- · Strong handles for easy carrying
- · Available in black, yellow or green
- · Ideal for gardens, homes, stables, construction sites and a huge range of alternative applications



PRODUCT	DESCRIPTION	PRICE EX. VAT
1 JEFFLXTUB42-B	42 Litre Flexitub (Black)	
2 JEFFLXTUB42-Y	42 Litre Flexitub (Yellow)	
3 JEFFLXTUB42-G	42 Litre Flexitub (Green)	



- · Heavy duty design
- · Weather resistant
- · High rubber content that allows the material to bend and flex
- · Comfort grip handle
- · Ideal for mixing, pouring liquid, transporting waste and rubbish
- · Internal fill markings for accurate measurements of liquids and powders





15 Litre Black Tuff-Bull Bucket

## **5 GALLON WHITE** PLASTERERS BUCKET

# JEFBTPL5G

· Heavy duty bucket which can be used for mixing plaster

· Strong wire handle with plastic grip





# OILS, FLUIDS & LUBRICANTS

JEFBTB15L

## **1 LITRE 10W30 MULTIPURPOSE ENGINE OIL**

#### JEFOIL10W30-1L

Suitable for normally aspirated and turbo charged, highly stressed petrol and diesel engines in cars and heavy commercials, vans, plant, buses and industrial equipment. It is miscible with all synthetic and mineral based engine oils.



### 1 LITRE HT68 COMPRESSOR OIL

#### JEFOILHT68-1L

Specialist compressor oil which is also suitable for use in rotary screw, vane, vacuum pumps and reciprocating compressors.

- · Prolonged service life due to good oxidation resistance, excellent anti-wear and anti-corrosion properties
- · Low foaming tendency
- · Good demulsibility



## **LUBRICANTS, FLUIDS & SPRAYS**







PRODUCT	DESCRIPTION	PRICE EX. VAT
1 JEFSPR01A	Multi Purpose Lubricant 500ml Aerosol	
2 JEFSPR02	Zinc Galvanising Spray 500ml	
3 JEFSPR03	Cutting & Tapping Fluid 500ml	

## **1 LITRE WATER BASED ANTI SPATTER**

#### JEFASPWAT01L

This product is a ready to use water-based weld spatter release, suitable for spatter protection in all welding applications. It emits no harmful fumes, is non-flammable, biodegradable and offers short term protection against corrosion. It contains no silicones thereby eliminating preparation work for painting.



## **USE WITH ANY JEFFERSON** & TUNDRA MIG WELDERS

WELDING...SEE P.34-36

PRICE EX.VAT

# SPRAY PAINTS

#### **750ML LINE MARKER PAINT**

- · Ideal for painting in carparks, warehouses, engineering and construction environments
- · Suitable for both interior and exterior applications
- · Suitable for hand application as a spot marker or in conjunction with a line marking applicator
- · In suitable conditions this paint dries within approx. 30mins and cures within 24hrs
- · Suitable for use on asphalt (tarmac), concrete, gravel and grass
- · Available in a range of colours to denote a variety of signals
- · Cap colour indicates paint type

PRODUCT

1 JEFMLINE-0

JEFMLINE-B

JEFMLINE-R JEFMLINE-Y

JEFMLINE-G

JEFMLINE-W





Yellow: Hazard / Caution

Green: Safe Condition / Direction

White: General Marking

PRICE EX. VAT	lefferson	LINE MARKER SPRAY PAINT
	1	TI



#### **500ML SPRAY PAINT**

Jefferson Spray Paints are for interior and exterior use. With enhanced covering power and excellent adhesion and durability, this paint delivers a perfect finish on wood, metal, ceramic, plastic and other surfaces. Touch dry within 20-30 minutes of application in suitable environments.

DESCRIPTION

Line Marker Blue 750ml

Line Marker Red 750ml

Line Marker Yellow 750ml

Line Marker Green 750ml

Line Marker White 750ml

PRODUCT	DESCRIPTION	PRICE EX. VAT
1 JEFSPR10-MB	Matt Black Spray Paint 500ml	
2 JEFSPR11-GB	Gloss Black Spray Paint 500ml	
3 JEFSPR12-PG	Grey Primer Spray Paint 500ml	



# CABLE TIES

#### **CABLE TIES**

- Manufactured from Nylon 66 material, allowing for increased heat resistance, excellent abrasion resistance and outstanding dimensional stability, meaning higher tensile strength
- · All black cable ties within the range are UV resistant
- · Supplied in retail packs of 100
- · Ideal for domestic and industrial usage





1	1
	J
PRICE EX. VAT	J
EX. VAT	J
	J
	J
	J
	J



PRODUCT	DESCRIPTION	PRICE EX. VAT
JEFCT0100-2.5B	2.5mm x 100mm Black (Pack of 100)	
JEFCT0140-3.6B	3.6mm x 140mm Black (Pack of 100)	
JEFCT0160-4.8B	4.8mm x 160mm Black (Pack of 100)	
JEFCT0200-3.6B	3.6mm x 200mm Black (Pack of 100)	
JEFCT0200-4.8B	4.8mm x 200mm Black (Pack of 100)	
JEFCT0200-7.6B	7.6mm x 200mm Black (Pack of 100)	
JEFCT0300-4.8B	4.8mm x 300mm Black (Pack of 100)	
JEFCT0300-7.6B	7.6mm x 300mm Black (Pack of 100)	
JEFCT0370-4.8B	4.8mm x 370mm Black (Pack of 100)	
JEFCT0370-7.6B	7.6mm x 370mm Black (Pack of 100)	
JEFCT0450-4.8B	4.8mm x 450mm Black (Pack of 100)	
JEFCT0450-7.6B	7.6mm x 450mm Black (Pack of 100)	
JEFCT0450-9.0B	9.0mm x 450mm Black (Pack of 100)	
JEFCT0750-9.0B	9.0mm x 750mm Black (Pack of 100)	
JEFCT1220-9.0B	9.0mm x 1220mm Black (Pack of 100)	

# INDUSTRIAL HAND CARE

DESCRIPTION
2.5mm x 100mm Natural (Pack of 100)

3.6mm x 140mm Natural (Pack of 100)

7.6mm x 200mm Natural (Pack of 100)

9.0mm x 450mm Natural (Pack of 100)

9.0mm x 1020mm Natural (Pack of 100)

9.0mm x 1220mm Natural (Pack of 100)

# **GECKO GK1 HEAVY DUTY HAND WIPES (PACK OF 100)**

#### JEFHWIP100

PRODUCT

JEFCT0100-2.5W JEFCT0140-3.6W

JEFCT0200-7.6W

JEFCT0450-9.0W

JEFCT1020-9.0W

JEFCT1220-9.0W

- · Heavy-duty hand & surface wipe 20 x 20cm
- Specially designed for use in construction, facilities management, local authority, engineering, automotive & farming sectors
- Manufactured from a thick heavy duty blue material that is textured on one side & soft on the other side
- With a dermatologically tested anti-bacterial formula that easily removes grease and grime from hands & surfaces
- Manufactured in the UK & Certified to: BS EN14476, EN1650, EN1276, EN13697 EN13727 ISO9001 & ISO14001











## **GECKO GK1 HEAVY DUTY HAND CLEANSER**



- $\boldsymbol{\cdot}$  Designed to effectively remove oil, grease and ground-in soils and substances from skin
- · Contains no harsh solvents
- · Manufactured from natural extracts and ingredients, making it gentle on skin
- · Contains polychips to enhance cleansing action and lanolin to help prevent chapped and dry hands
- · Ideal for automotive, engineering, agricultural and domestic use



PRODUCT	DESCRIPTION	PRICE EX. VAT
1 JEFHCLN0.5	Gecko GK1 Heavy Duty Hand Cleanser 500ml	
2 JEFHCLN03	Gecko GK1 Heavy Duty Hand Cleanser 3L	

#### SYMBOL GLOSSARY







TRX-Star / Torx





110 Volt 230 Volt (230V Input Power Input Power



415 Volt 415V) Input Power



Fitted with 13A plua









Electric Start Motor



Automatic Voltage Regulator







Imperial Measure



Metric Measure

Manufactured from Chrome Vanadium



Manufactured from Chrome Molybdenum







**Phillips** 



Pozi



Slotted



Roller Bearing Function for Easy



Supplied in a Blow Moulded Case





Coated with UV-Ray Resistant Paint Chip On



Water-Based

Suitable for



Insulation



(LATEX) Includes Latex



Lockable Drawers

Protection

DIRECT

DRIVE

Rating



Max. Lifting Capacity



Max. Load

Board LEDs



Surface Mounted Diode LEDs



Insulation







Kevlar Stitching

Nylon Coating Reduces the Wear on the Blade



Cut Level 5 Protection



Premium Motor Efficiency



Super Premium Motor Efficiency





Protected from water splashes from any



Protected against solid objects bigger than 1mm and water sprays from any direction



Protected from limited dust ingress and water spray from any direction



Protected from total dust ingress and water spray from any direction



Protected from total dust ingress and low pressure water jets from any direction

Phase



Heavy Duty Products deemed suitable for use on-site which have been designed to withstand the stresses of demanding use



Light Trade products suitable for less industrial applications while ensuring excellent value for money

"V" Twin

Pump





300 Second Boost enables a fast charge



Direct Drive Motor MacGen Engine



Drive Motor Loncin









Purpose



Rechargeable















Allows for a potential error of ±2.3mm over a 10m length



100% Copper







Tane Volt Input Power



Stage V Emissions Standard



Profile

Lithium Ion

Single

Phase

Wire Guaranteed



High-Brightness LEDs



HD Lens

INDUSTRIAL

extreme environmental and physical demands

The "Industrial" badge represents products which have been tested in rugged environments, proving their durability under

# PROFESSIONAL

The "Professional" badge represents products which have been tested in controlled environments to prove their durability under professional environmental and physical demands



To make choosing the right product a little easier, we have added the **Bestseller** icon to the most popular products within our exceptional range of tools & equipment

\*\* NEW!

Look out for the New Product badge for all the new arrivals in this seasons' catalogue



Jefferson offers a minimum one year warranty, with the compressor range covered for two years. Lifetime warranty badges can be found on some Jefferson hand tools and may apply to non-moving parts only. The Tundra three year warranty covers the machine only of the plasma cutter. Visit jeffersontools.com/warranty-repairs to find out more about Jefferson Warranty and to complete a Warranty Registration Form for your brand new products.



PCL MK4 tyre inflators have now extended warranty from 12 months to two years.

#### SUB-BRANDS










aute Mis

||||| INFERNO\*\*















Dynamo"



LATINUM





AIR TOOLS ★ WELDING ★ POWER TOOLS ★ HEATING & COOLING ★ PRESSURE WASHING ★ ACCESS EQUIPMENT ★ AUTOMOTIVE & WORKSHOP ★ LIGHT & POWER
HAND TOOLS ★ STORAGE, LIFTING & TRANSPORT ★ PERSONAL PROTECTION EQUIPMENT ★ ABRASIVES ★ FLUID & GREASE HANDLING ★ GENERAL SUPPLIES





SCAN HERE TO VISIT US ONLINE



**CALL US:** 

**OUR OFFICE IS OPEN:** 

Monday - Thursday 8.30am - 5.00pm Friday 8.30am - 4.00pm

The information in this catalogue is to the best of our knowledge true and accurate, but all recommendations or suggestions are made without guarantee. All Jefferson® pricing is subject to change due to potential changing market conditions. Since the conditions of use are beyond their control, Jefferson® Tools disclaim any liability for loss or damage suffered from the use of this data or suggestions. Furthermore no liability is accepted if use of any product in accordance with this data or suggestions infringes any patent. Jefferson® Tools reserve the right to change product specification without further notification. All images are for illustration purposes only and remain copyright Jefferson® Tools.